



HESTORE.HU

elektronikai alkatrész áruház


EN: This Datasheet is presented by the manufacturer.

Please visit our website for pricing and availability at www.hestore.hu.

SONOFF


TX Ultimate

User manual V1.0

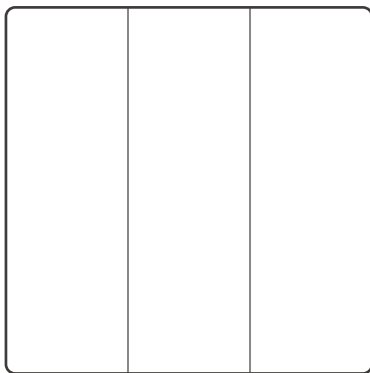

Smart Touch Wall Switch

Product introduction

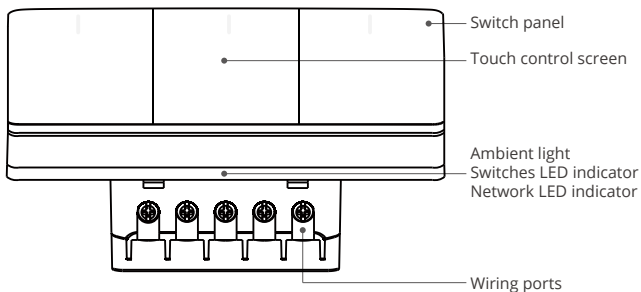


⚠ The device weight is less than 1kg, and the recommended installation height is less than 2m.


LED Indicator status and instruction

LED indicators	LED indicator status	Instructions
Pairing LED indicator	In the "Cycle mode"	Device is in pairing mode
Network LED indicator	Flashes blue quickly once	Device is not connected to router
	Flashes blue quickly twice	Device is connected to the router but not to the cloud


Operation instruction




Quick click



Long press



Swipe



Multi-point click

Operations	Instructions	Functions
Quick click	Click the switch panel quickly	Turn on/off the switches and trigger the smart scenes
Long press	Long press the switch panel for 5s	Make the device enter the pairing mode
Swipe	Swipe on the switch panel and ensure the swipe distance exceeds 50% of it • T5-86 supports left/right swipe	Trigger the smart scene
Multi-point click	Multiple fingers click the switch panel	Turn on/off the ambient light manually

Features

SONOFF TX Ultimate is a smart touch wall switch with LED lights which will produce sound, light and vibration effects when it is turned on/off. After adding in the eWeLink App, you can remote control on/off, switch the ambient lighting modes, set timer and smart scene on the phone.



Remote Control



Voice Control



Smart Scene



Ambient Lighting Mode




Touch Vibration



Light Effects

Installation



1. Power off




⚠ Please install and maintain the device by a professional electrician. To avoid electric shock hazard, do not operate any connection or contact the terminal connector while the device is powered on!

2. Wiring instruction

Before installing the device, please install an air switch as the protective device (Air switch 16A/250V).

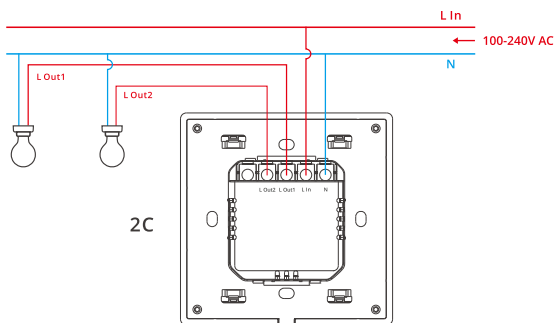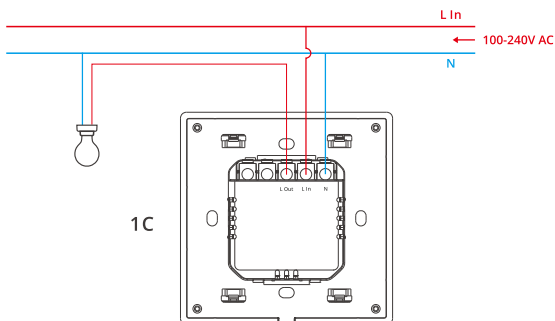

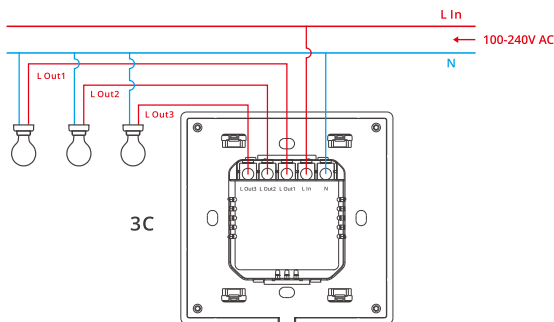

⚠ Make sure all wires are connected correctly.

Pairing Method

1. eWeLink App Pairing


1-1 Download the eWeLink App

Please download the "eWeLink" App from Google Play Store or Apple App Store.



1-2 Power on


After powering on, the device will enter the Bluetooth pairing mode by default during the first use and the LED frame light will light in the "Cycle mode".



- ⓘ The device will exit the Bluetooth pairing mode when it doesn't be paired successfully within 10mins. If you want to access the pairing mode again, touch the wall switch panel for 5s until the LED frame light lights in the "Cycle mode".

1-3 Add device

Tap "+" and select "Bluetooth Pairing", then operate following the prompt on the App.

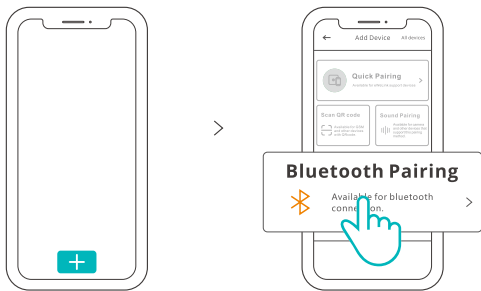


2. Amazon Frustration-Free Setup (FFS)

Applicable situation: The account you use to purchase this device on Amazon.com is the same as the Alexa account you sign in the smart speaker (with Certified for Humans badge).

2-1

After power on the device, it will enter the FFS pairing mode by default (LED indicator flashes in "Cycle mode").



2-2

When you hear "New switch found" after powering on for about 1-2 mins, refresh the device list in the Alexa App and you will see the device is added successfully.



<https://sonoff.tech/product-review/tutorial/works-with-alexa-instruction-guide/>

1. The device will exit FFS pairing mode if it had not been paired within 30mins. If you want to enter the pairing mode again, please long press the switch panel for 5s until the LED indicator flashes in "cycle mode".
2. If the device cannot be paired through FFS pairing mode for a long time, please pair the device by method (1) eWeLink App pairing.
3. The method of FFS pairing can only be used to add devices to Alexa App.
4. If you want to synchronize this device between eWeLink App and Alexa App, please connect the accounts of eWeLink and Alexa through Account Linking, scan the QR code or enter the URL to check the guideline of Account Linking.

Add eWeLink-Remote Sub-devices

Enter the Device Settings page on the eWeLink App, select "eWeLink-Remote sub-devices" and tap "Add", then trigger the sub-device to add it successfully.



Specifications

Model	T5-1C-86/T5-2C-86/T5-3C-86
Input	1C:100-240V ~ 50/60Hz Max 5A 2C:100-240V ~ 50/60Hz Max 10A 3C:100-240V ~ 50/60Hz Max 15A
Output	1C:100-240V ~ 50/60Hz Max 5A 2C:100-240V ~ 50/60Hz Max 5A/Gang 10A/Total 3C:100-240V ~ 50/60Hz Max 5A/Gang 15A/Total
Wi-Fi	IEEE 802.11b/g/n 2.4GHz
Working temperature	-10°C ~ 40°C
Working humidity	5% ~ 95% RH, non-condensing
Color	White
Casing material	PC
Dimension	86x86x39mm

本产品型号核准代码在铭牌上显示

执行标准：GB/T 16915.2-2012

产品中有害物质的名称及含量

部件名称	有害物质					
	铅 (Pb)	汞 (Hg)	镉 (Cd)	六价铬 (Cr {VI})	多溴联苯 (PBB)	多溴二苯醚 (PBDE)
塑料件	o	o	o	o	o	o
电子元器件	x	o	o	o	o	o
包装盒	o	o	o	o	o	o
PCB板	o	o	o	o	o	o

本表格依据SJ/T 11364 的规定编制：

o：表示该有害物质在该部件所有均质材料中的含量均在GB/T 26572规定的限量要求以下；

x：表示该有害物质至少在该部件的某一均质材料中的含量超出GB/T 26572规定的限量要求。



SAR Warning

Under normal use of condition, this equipment should be kept a separation distance of at least 20cm between the antenna and the body of the user.

Under normal use of condition, this equipment should be kept a separation distance of at least 20 cm between the antenna and the body of the user. Dans des conditions normales d'utilisation, cet équipement doit être maintenu à une distance d'au moins 20 cm entre l'antenne et le corps de l'utilisateur.

WEEE Warning



WEEE Disposal and Recycling Information All products bearing this symbol are waste electrical and electronic equipment (WEEEs in directive 2012/19/EU) which should not be mixed with unsorted household waste. Instead, you should protect human health and the environment by handing over your waste equipment to a designated collection point for the recycling of waste electrical and electronic equipment, appointed by the government or local authorities. Correct disposal and recycling will help prevent potential negative consequences to the environment and human health. Please contact the installer or local authorities for more information about the location as well as terms and conditions of such collection points.

EU Declaration of Conformity

Hereby, Shenzhen Sonoff Technologies Co., Ltd. declares that the radio equipment type T5-1C-86, T5-2C-86, T5-3C-86 are in compliance with Directive 2014/53/EU. The full text of the EU declaration of conformity is available at the following internet address:

<https://sonoff.tech/usermanuals>

For CE Frequency:

Operation frequency Range:

2402-2480MHz(BLE)

802.11 b/g/n20: 2412-2472MHz

802.11 n40: 2422-2462MHz

RF Output Power:

2dBm(BLE)

15dBm(802.11b), 14dBm(802.11g), 15dBm(802.11n20),

16dBm(802.11n40)(Wi-Fi)

SONOFF

Shenzhen Sonoff Technologies Co., Ltd.

3F & 6F, Bldg A, No. 663, Bulong Rd, Shenzhen, Guangdong, China

ZIP code: 518000

Website: sonoff.tech

MADE IN CHINA



FR

Cet appareil
se recycle

À DÉPOSER
EN MAGASIN



ou

À DÉPOSER
EN DÉCHÈTERIE



Points de collecte sur www.quefairedemesdechets.fr
Privilégiez la réparation ou le don de votre appareil !