




**HESTORE.HU**

elektronikai alkatrész áruház

**EN:** This Datasheet is presented by the manufacturer.

Please visit our website for pricing and availability at [www.hestore.hu](http://www.hestore.hu).

## RADIAL LEADED PTC RB MODEL




### ■ FEATURES

- Radial Leaded, high hold current, solid state
- Operation current 900mA~9A
- Maximum Voltage 30V
- Temperature range -40°C to 85°C
- Cured, flame retardant epoxy polymer insulating material meets UL 94V-0 requirement
- Bulk packaging, tape and reel available on most models

### ■ APPLICATIONS


- ◆ Ideal for low voltage power supply with a load to be protected:
  - Computers & peripherals
  - Security and fire alarm system
  - General electronics
  - Loud speakers
  - Automotive applications
  - Power transformers

### ■ PART NUMBERING SYSTEM

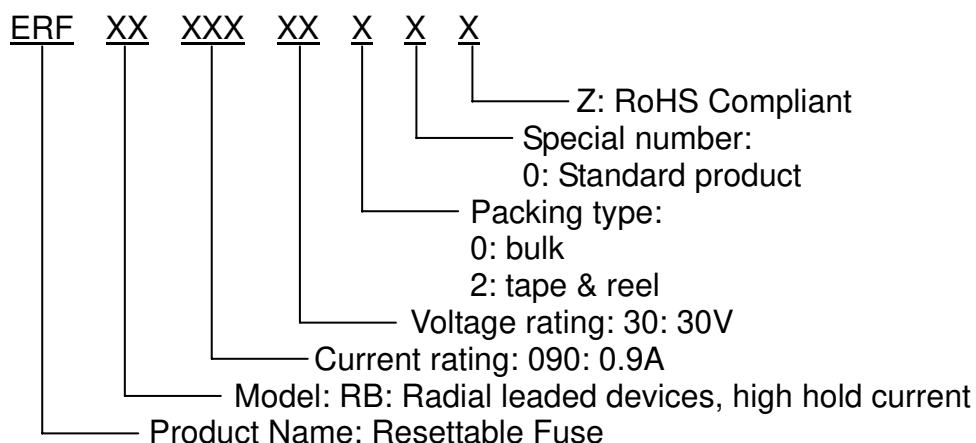


**NOTE: Specifications subject to change without prior notice.**

## ■ Marking system



Example

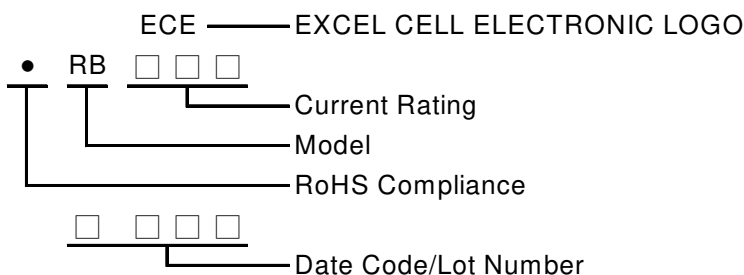

## ■ Electrical characteristics(23°C)

Part Number	Hold Current	Trip Current	Max. Time to trip	Maximum Current	Rated Voltage	Typical Power	Resistance Tolerance	
	I <sub>H</sub> , A	I <sub>T</sub> , A	at 5xI <sub>H</sub>	I <sub>MAX</sub> , A	V <sub>MAX</sub> , V <sub>dc</sub>	P <sub>d</sub> , W	R <sub>MIN</sub>	R <sub>1MAX</sub>
							Ω	Ω
<b>RB090-30</b>	0.90	1.80	5.9	40	30	0.6	0.070	0.22
<b>RB110-30</b>	1.10	2.20	6.6	40	30	0.7	0.050	0.17
<b>RB135-30</b>	1.35	2.70	7.3	40	30	0.8	0.040	0.13
<b>RB160-30</b>	1.60	3.20	8.0	40	30	0.9	0.030	0.11
<b>RB185-30</b>	1.85	3.70	8.7	40	30	1.0	0.030	0.09
<b>RB250-30</b>	2.50	5.00	10.3	40	30	1.2	0.020	0.07
<b>RB300-30</b>	3.00	6.00	10.8	40	30	2.0	0.020	0.08
<b>RB400-30</b>	4.00	8.00	12.7	40	30	2.5	0.010	0.05
<b>RB500-30</b>	5.00	10.00	14.5	40	30	3.0	0.010	0.05
<b>RB600-30</b>	6.00	12.00	16.0	40	30	3.5	0.005	0.04
<b>RB700-30</b>	7.00	14.00	17.5	40	30	3.8	0.005	0.03
<b>RB800-30</b>	8.00	16.00	18.8	40	30	4.0	0.005	0.02
<b>RB900-30</b>	9.00	18.00	20.0	40	30	4.2	0.005	0.02

I<sub>H</sub>=Hold current-maximum current at which the device will not trip at 23°C still air.

I<sub>T</sub>=Trip current-minimum current at which the device will always trip at 23°C still air.

V<sub>MAX</sub>=Maximum voltage device can withstand without damage at rated current.

I<sub>MAX</sub>= Maximum fault current device can withstand without damage at rated voltage (V max).

P<sub>d</sub>=Typical power dissipated from device when in the tripped state in 23°C still air environment.


R<sub>MIN</sub>=Minimum device resistance at 23°C.

R<sub>1MAX</sub>=Maximum device resistance at 23°C 1 hour after tripping .


**NOTE: Specifications subject to change without prior notice.**

■ **Typical time-to-trip-at 23°C**

- A=RB090-30
- B=RB110-30
- C=RB135-30
- D=RB160-30
- E=RB185-30
- F=RB250-30
- G=RB300-30
- H=RB400-30
- I=RB500-30
- J=RB600-30
- K=RB700-30
- L=RB800-30
- M=RB900-30

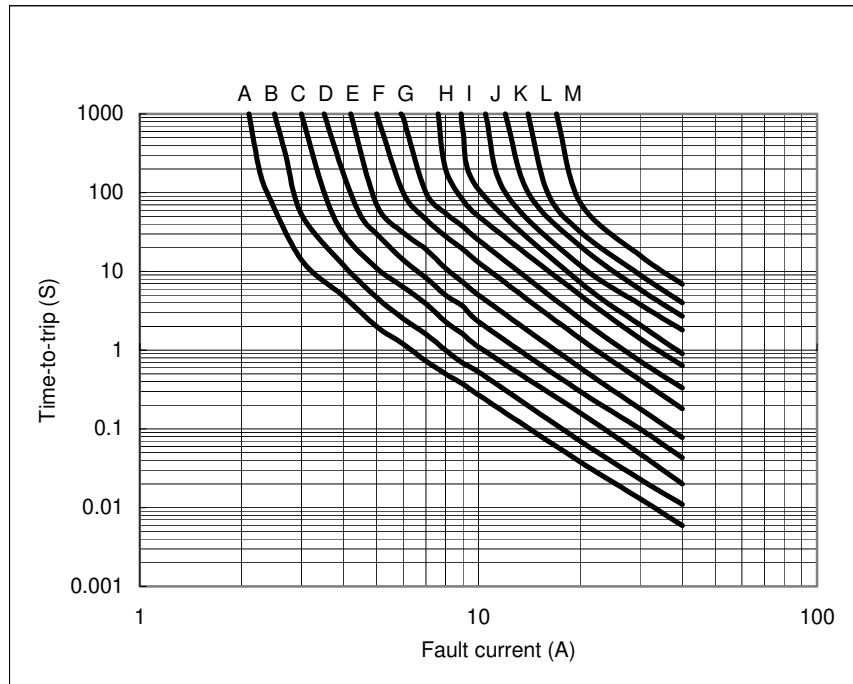





■ **Thermal Derating Curve**

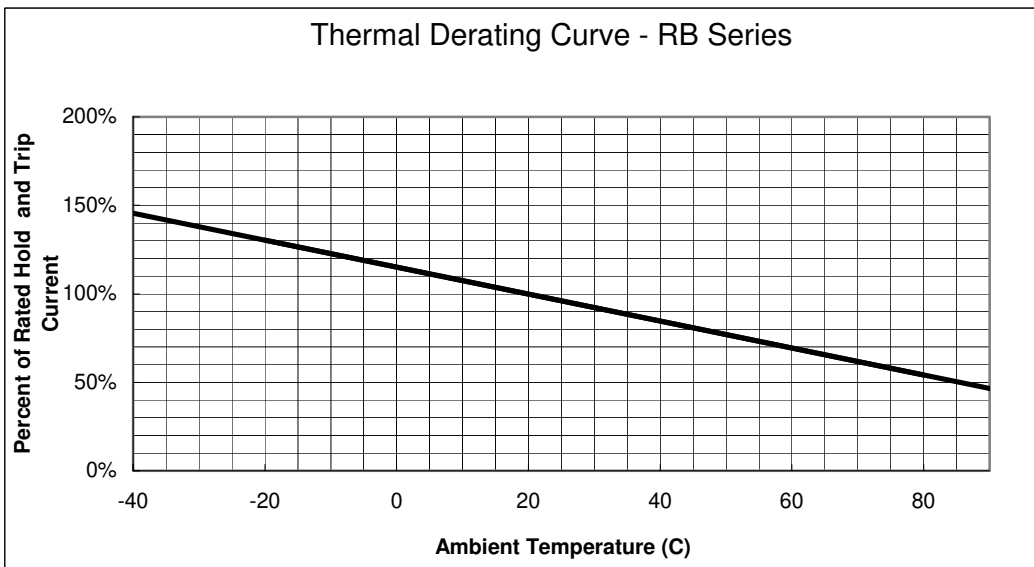

**NOTE: Specifications subject to change without prior notice.**

■ **RB Product Dimensions (UNIT: mm)**

Part Number	A	B	C	D	E	F
	Maximum	Maximum	Typical	Minimum	Maximum	Typical
RB090-30	7.4	12.2	5.1	7.6	3.0	0.9
RB110-30	7.4	14.2	5.1	7.6	3.0	0.9
RB135-30	8.9	13.5	5.1	7.6	3.0	0.9
RB160-30	8.9	15.2	5.1	7.6	3.0	0.9
RB185-30	10.2	15.7	5.1	7.6	3.0	0.9
RB250-30	11.4	18.3	5.1	7.6	3.0	0.9
RB300-30	11.4	17.3	5.1	7.6	3.0	1.2
RB400-30	14.0	20.1	5.1	7.6	3.0	1.2
RB500-30	14.0	24.9	10.2	7.6	3.0	1.2
RB600-30	16.5	24.9	10.2	7.6	3.0	1.2
RB700-30	19.1	26.7	10.2	7.6	3.0	1.2
RB800-30	21.6	29.2	10.2	7.6	3.0	1.2
RB900-30	24.1	29.7	10.2	7.6	3.0	1.2

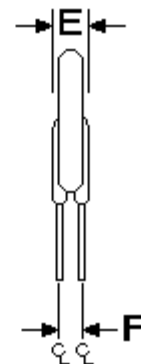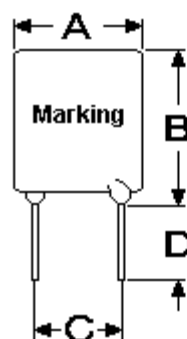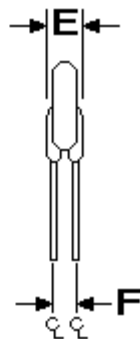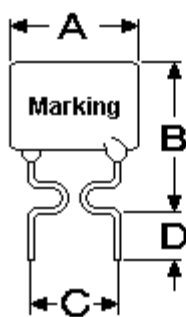

RB 090-30 ~ RB 250-30

- Lead Size: 24AWG
- $\varnothing$  0.51mm Diameter

RB 300-30 ~ RB 900-30

- Lead Size: 20AWG
- $\varnothing$  0.81mm Diameter

**NOTE:** Specifications subject to change without prior notice.