




HESTORE.HU

elektronikai alkatrész áruház

EN: This Datasheet is presented by the manufacturer.

Please visit our website for pricing and availability at www.hestore.hu.

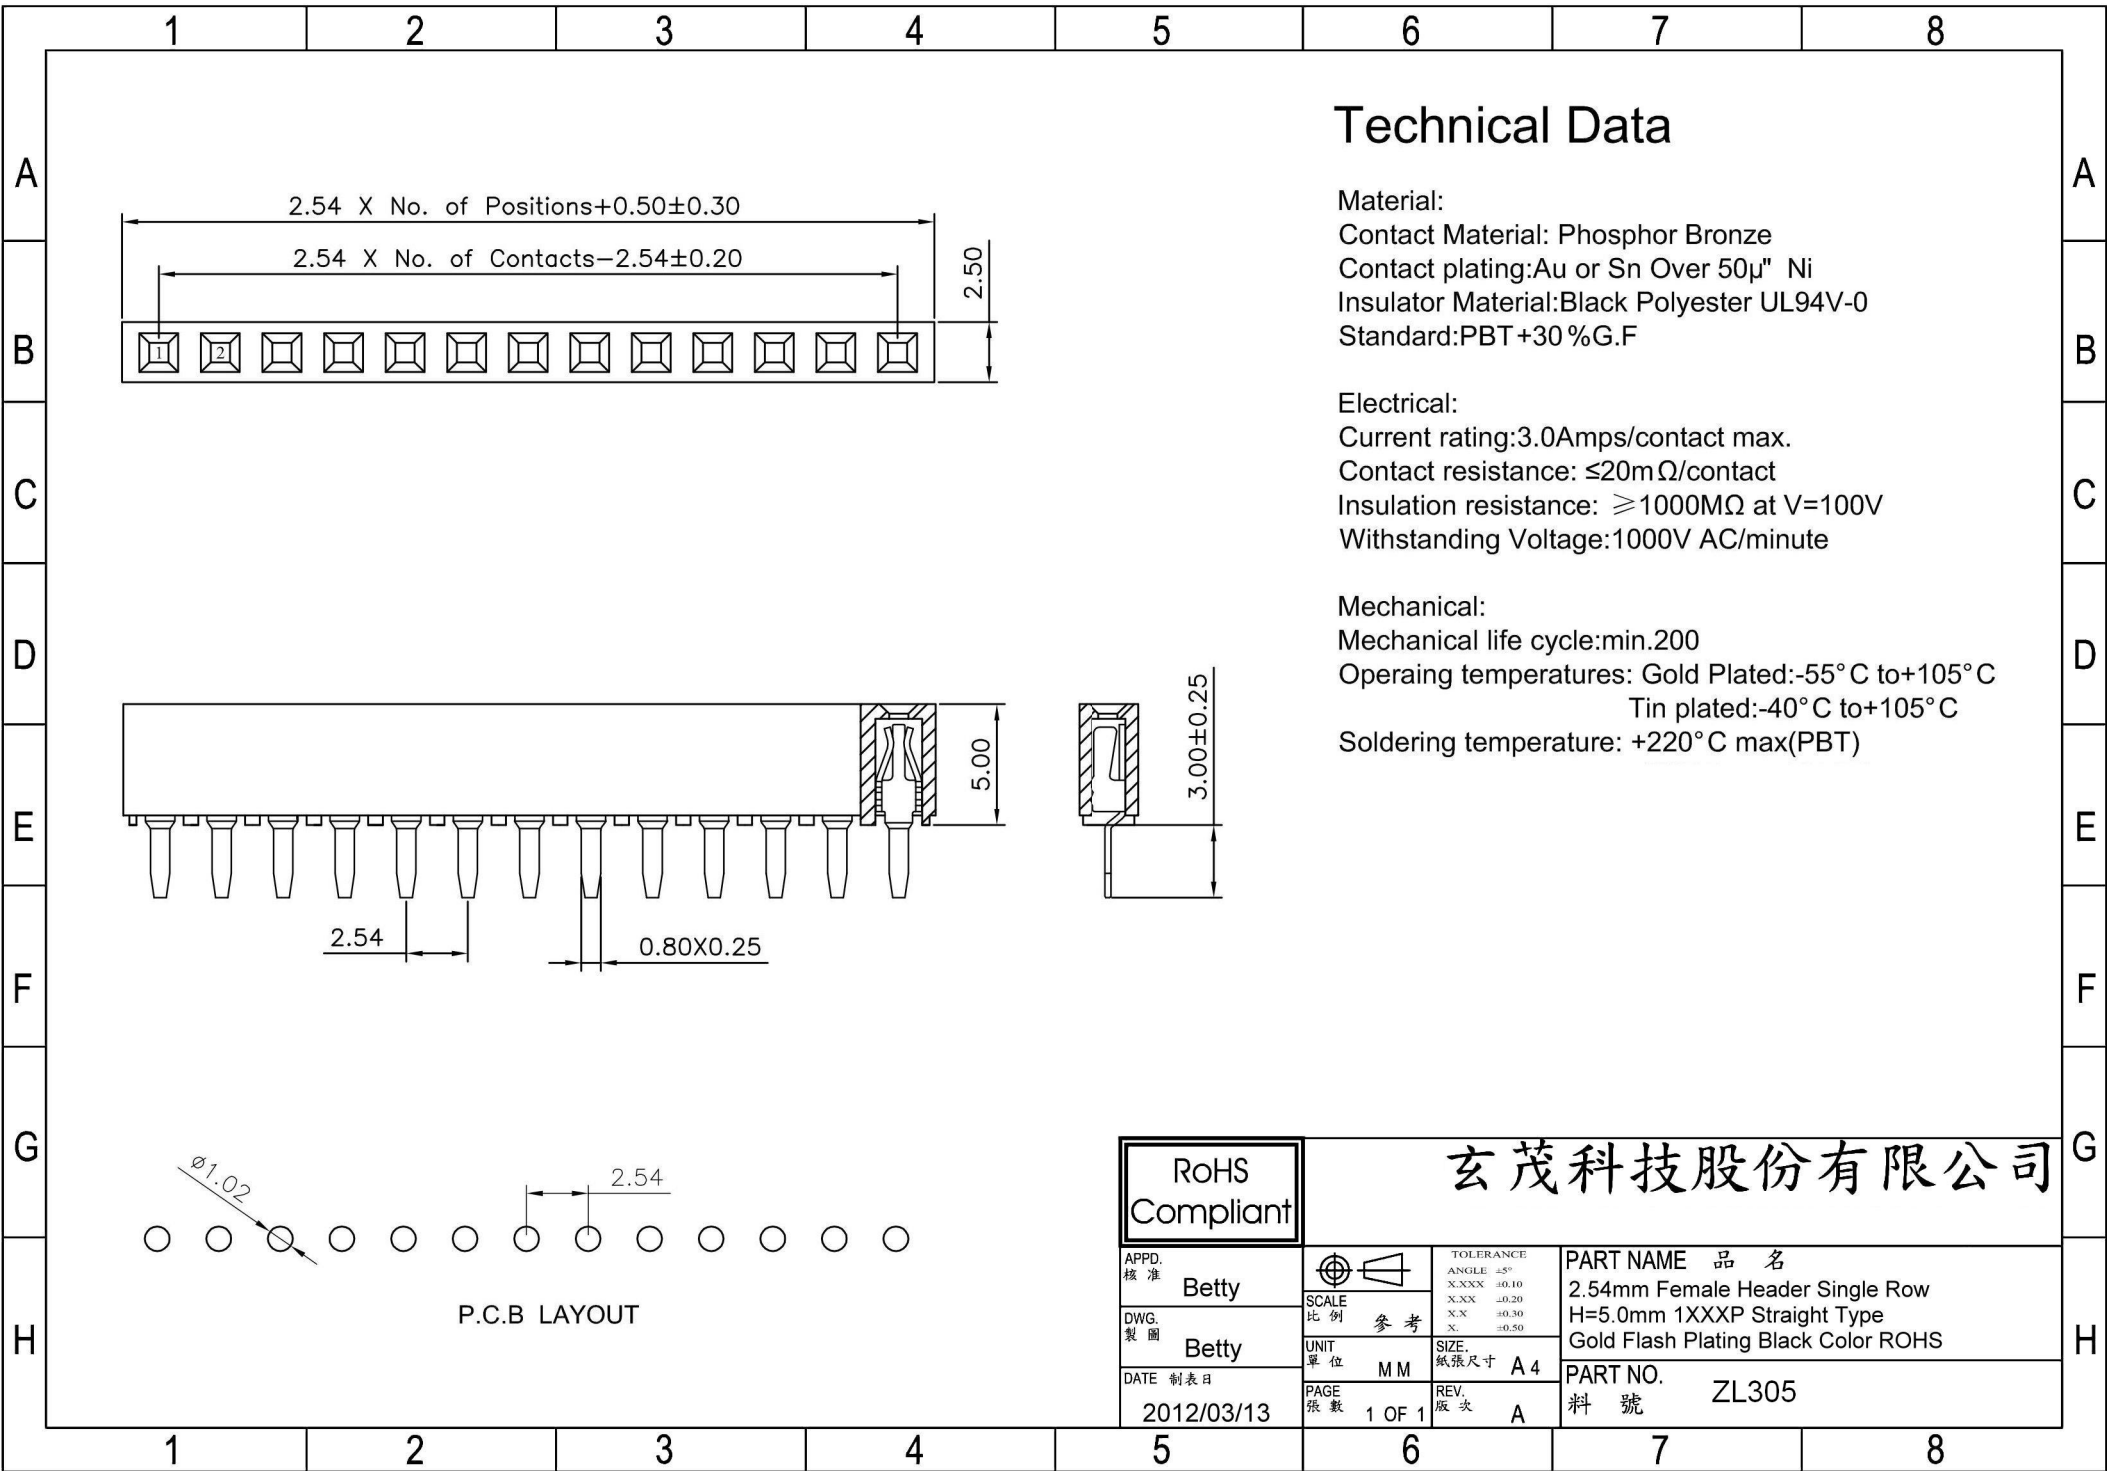

Technical Data

Material:
 Contact Material: Phosphor Bronze
 Contact plating: Au or Sn Over 50μ" Ni
 Insulator Material: Black Polyester UL94V-0
 Standard: PBT + 30 % G.F

Electrical:
 Current rating: 3.0Amps/contact max.
 Contact resistance: ≤ 20mΩ/contact
 Insulation resistance: ≥ 1000MΩ at V=100V
 Withstanding Voltage: 1000V AC/minute

Mechanical:
 Mechanical life cycle: min.200
 Operating temperatures: Gold Plated: -55° C to +105° C
 Tin plated: -40° C to +105° C
 Soldering temperature: +220° C max(PBT)

RoHS
Compliant

玄茂科技股份有限公司

APPD. 核准 Betty		TOLERANCE ANGLE ±5° X.XXX ±0.10 X.XX ±0.20 X.X ±0.30 X ±0.50
DWG. 製圖 Betty		SCALE 比例 參考
DATE 制表日 2012/03/13	UNIT 單位 M M	SIZE. 紙張尺寸 A 4
	PAGE 張數 1 OF 1	REV. 版次 A

PART NAME 品名 2.54mm Female Header Single Row H=5.0mm 1XXXP Straight Type Gold Flash Plating Black Color ROHS
PART NO. 料號 ZL305