



**HESTORE.HU**



elektronikai alkatrész áruház

**EN:** This Datasheet is presented by the manufacturer.

Please visit our website for pricing and availability at [www.hestore.hu](http://www.hestore.hu).


# PCB and Terminal Block

## PCB of position " A" for DXMG use

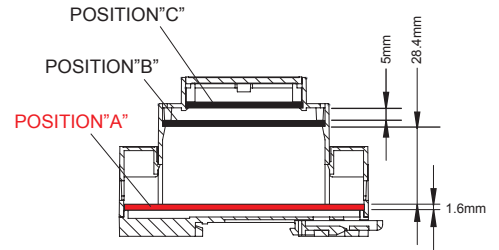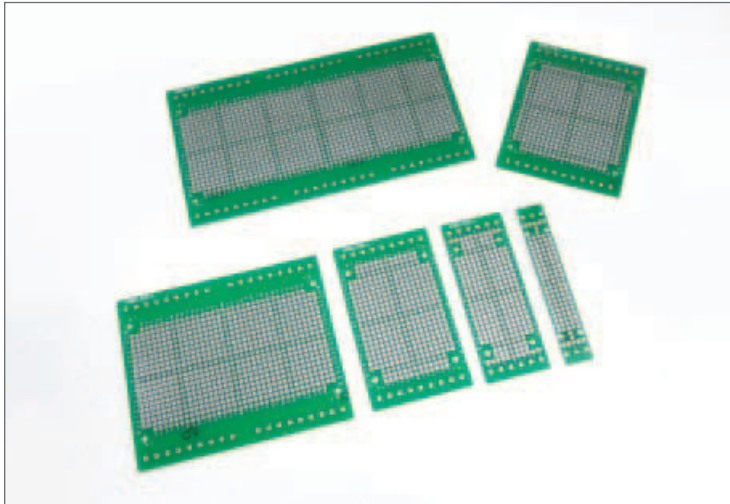


| ITEM No.   | EXTERNAL DIMENSION(mm) |       |        |
|------------|------------------------|-------|--------|
|            | LENGTH                 | WIDTH | HEIGHT |
| D1MG-PCB-A | 14.3                   | 86.9  | 1.6    |
| D2MG-PCB-A | 32.8                   | 86.9  | 1.6    |
| D3MG-PCB-A | 50                     | 86.9  | 1.6    |
| D4MG-PCB-A | 67.8                   | 86.9  | 1.6    |
| D6MG-PCB-A | 102.8                  | 86.9  | 1.6    |
| D9MG-PCB-A | 156.2                  | 86.9  | 1.6    |


### Example:




D1MG  
with D1MG-PCB-A




D2MG  
with D2MG-PCB-A




D3MG  
with D3MG-PCB-A



D4MG  
with D4MG-PCB-A



D6MG  
with D6MG-PCB-A




D9MG  
with D9MG-PCB-A

## 3WAY of terminal block for DXMG use



| ITEM No.  | PRODUCT DESCRIPTION                                      |
|-----------|--|
| DXMG-3WAY | 3WAY of terminal block for D2MG/D3MG/D4MG/D6MG /D9MG use |

### DXMG-3WAY DRAWING:

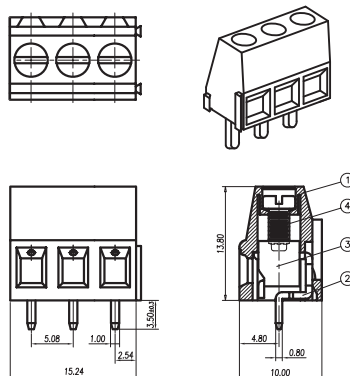

#### NOTES:

1. Rating: 300V 20A (IEC 250V 24A)  
PITCH: 5.08mm
2. Insulation Withstands Voltage:  
AC 2000V at 1 minute
3. Insulation Resistance:  
500M Ω or more at DC500V
4. Using Temperature Range:  
-40°C~+105°C
5. Suitable Electric Wire:  
24~12AWG(IEC 0.5~2.5mm<sup>2</sup>)
6. Torque Value: 4 kg-cm
7. RoHS compliance

### Example:



D2MG with  
3WAY of terminal block



D6MG with  
3WAY of terminal block