




HESTORE.HU

elektronikai alkatrész áruház

EN: This Datasheet is presented by the manufacturer.

Please visit our website for pricing and availability at www.hestore.hu.

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	HP 18/07/05		

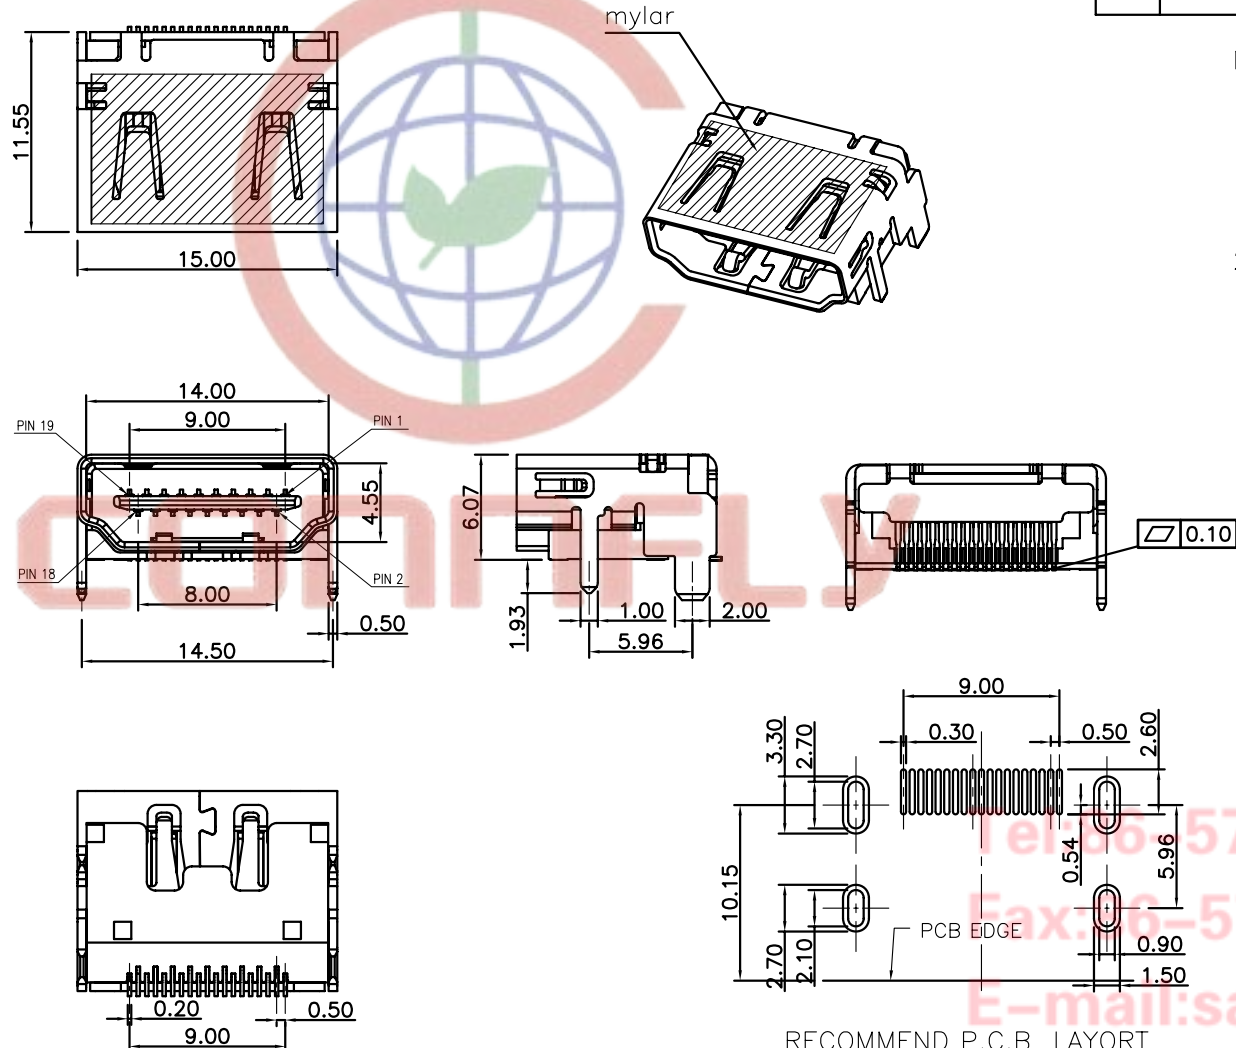

NOTES:

1. MATERIALS

- . Insulator: thermoplastic,UL 94V-0 Rated
- . Contacts: Copper Alloy
- . Shell: Copper Alloy

2. SPECIFICATION

- . Contact resistance: 50mΩ max.
- . Insulation resistance: 100MΩ min.
- . Dielectric withstanding voltage: 100 VAC 1 minute.
- . Temperature range: -40°C to +80°C.


3. PRODUCT NUMBER CODE:

DS1114 - X X X X X

- Packing type
R:Tape on reel
B:Tube
- MYLAR SUPPORT
S:W/ mylar
X:W/O mylar
- Contact plating
0: selective gold flash
C: selective 3u" gold
1: selective 10u" gold
- Shell plating
6: Tin
N: Nickel
- Color of housing
B: Black

RECOMMEND P.C.B LAYORT
(Tolerance±0.05)

GENERAL TOLERANCE	ANGLE TOLERANCE	PROJECTION	⊕ - ∟	TITLE
X. ±0.60	X. ±5°	UNITS	mm	HDMI 19PIN Female SMT WITHOUT FLANGE
.X ±0.38	.X ±3°	SHEET SIZE	A4	SERIES DS1114
.XX ±0.25	.XX ±2°			
DRAWING TYPE	CUSTOMER			
SCALE	1:1	SHEET	1 OF 1	
DRAWING NO.	C-DS1114-XXXXX			

 晨翔电子有限公司
CONNFLY CONNFLY ELECTRONIC CO. LTD