



HESTORE.HU


elektronikai alkatrész áruház

EN: This Datasheet is presented by the manufacturer.


Please visit our website for pricing and availability at www.hestore.hu.

APPROVED: _____
 DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	2/06/10	
A		REVISED SHAPE	5/05/11	

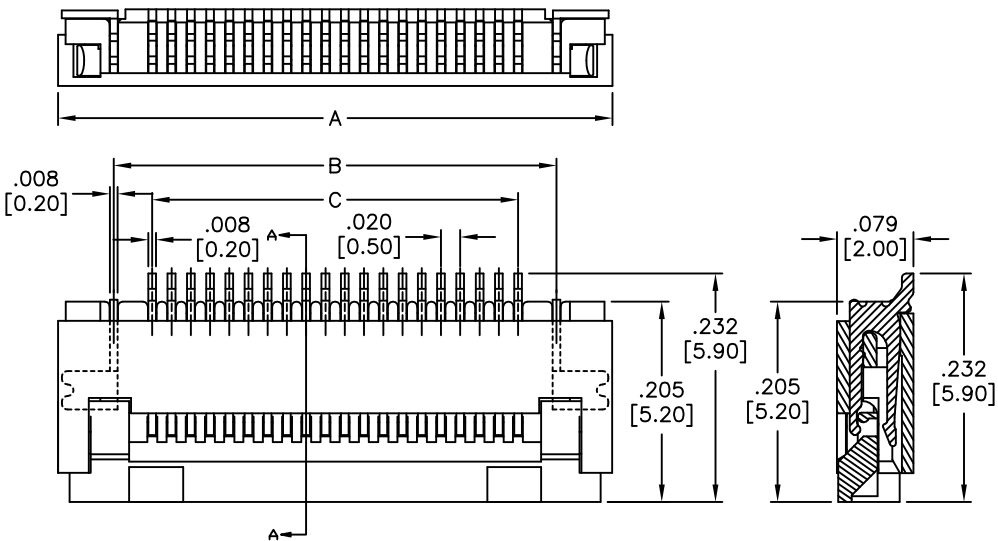


SEC A-A

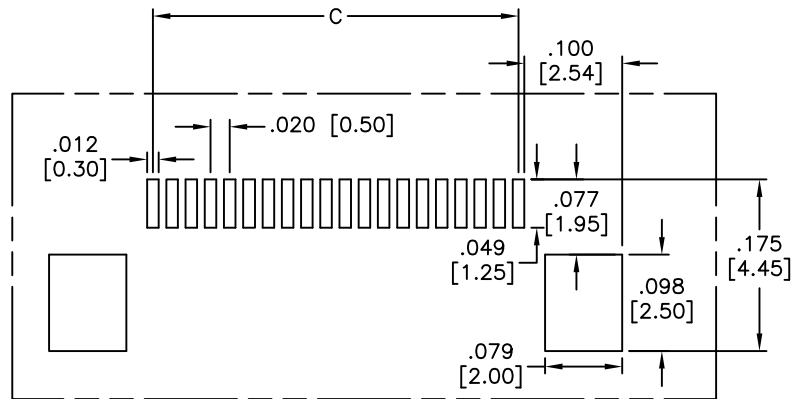

RECOMMENDED PCB LAYOUT

Positions: 4 thru 60
 A = C + .193 [4.90]
 B = C + .079 [2.00]
 C = .020 [0.50] x No. of Spaces
 D = C + .043 [1.10]



SPECIFICATIONS:

Material:
 Housing: Hi-temp thermoplastic, rated UL 94V-0, color Natural
 Slider: Hi-temp thermoplastic, rated UL 94V-0, color Black
 Contact: Copper alloy
 Fitting Nail: Copper alloy
 Plating:
 Tin over Copper underplate overall
 Electrical:
 Current rating: 0.4A AC/DC
 Voltage rating: 50V AC/DC
 Withstand voltage: 200V AC/minute
 Contact resistance: 20 mohms max.
 Insulation resistance: 500 mohms min.
 Temperature Rating:
 Temperature range: -25°C to +85°C
 Environmental:
 Lead free, RoHS compliant.



UNLESS OTHERWISE SPECIFIED
 ALL DIMENSIONS ARE INCHES [MM]
 TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	∅X	± .10
.XX	± .020	∅XX	± .015
.XXX	± .015	∅XXX	± .010

ADAM TECH

909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

APPROVALS		DATE
DRAWN	DY	2/06/10
CHECKED		
APPROVED		

TITLE		
ZIF FLEX CIRCUIT CONNECTOR, 0.50 MM PITCH SIDE ENTRY, LOWER CONTACT		
SIZE	PART NO.	REV.
X	PCA-6G-XX-HL-3	A
REF: S00167T	SCALE: NTS	SHEET 1 OF 1