





HESTORE.HU



elektronikai alkatrész áruház

EN: This Datasheet is presented by the manufacturer.

Please visit our website for pricing and availability at www.hestore.hu.

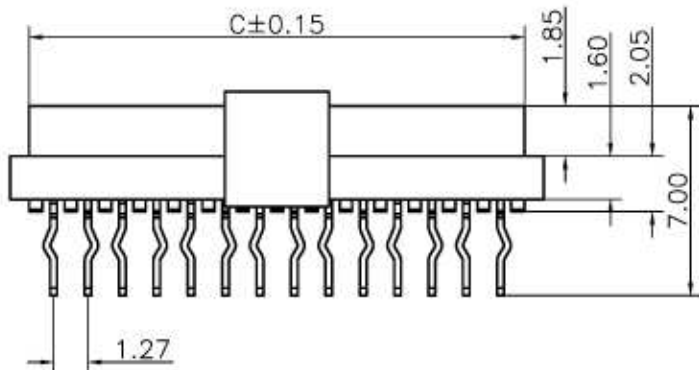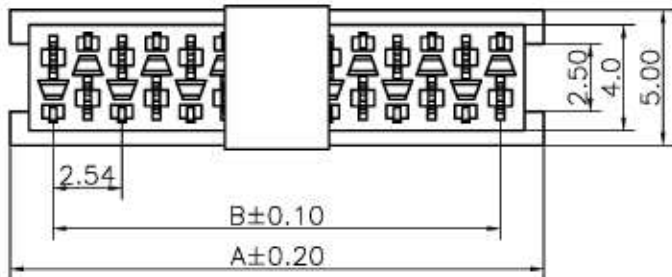

Pos	A	B	C
4	7.00	3.81	5.60
6	9.54	6.35	8.14
8	12.08	8.89	10.68
10	14.62	11.43	13.22
12	17.16	13.97	15.76
14	19.70	16.51	18.30
16	22.24	19.05	20.84
18	24.78	21.59	23.38
20	27.32	24.13	25.92
22	29.86	26.67	28.46
24	32.40	29.21	31.00
26	34.94	31.75	33.54

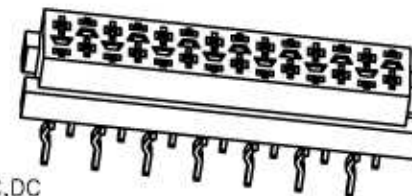

Specifications:
 Current rating:1.0A AC,DC
 Voltage rating:30V AC, DC
 Contact resistance:20m ohm Max
 Insulation resistance:1000M ohm Min
 Withstanding voltage:AC 500V AC/minute
 Operating Temperature:-40°C ~ +105°C
 Materials:
 Insulator:High Temp Plastic UL94V-0
 Contact material:Phosphor Bronze
 Finish:Tin Plated

How to Order


TMM-X-X-XX-X

Type
 1-IDC Male
 2-IDC Plug
 3-DIP Male Straight
 4-DIP Female Straight
 5-DIP Female R/A
 6-SMT Female Straight

Locking System
 0-without lock
 L-with lock

Packaging
 1 - Tape & Reel
 2 - Tube
 3 - Bag

Number of Positions
 04, 06, 08, 10, 12,
 14, 16, 18 or 20

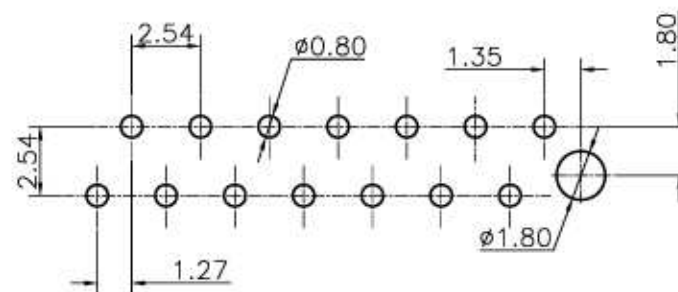

PCB Layout



TOLERANCE (mm)	APPROVALS	DATE	TITLE	AMPHENOL Amphenol European Design Center	
X, ±0.3	DESIGN: Stephane	2005/04/22	Micro Match Dip type Female	Scale N.A.	Sheet 1 of 1
X.X, ±0.1	CHECKED: Rob K.	2005/04/23			
X.XX, ±0.05	APPROVED: Rob K.	2005/04/23			
UNLESS OTHERWISE SPECIFIED	UNIT:	SIZE: MM	DRAWING N°: TMM-4-0-XX-X	REV: A	