






**HESTORE.HU**

elektronikai alkatrész áruház


**EN:** This Datasheet is presented by the manufacturer.

Please visit our website for pricing and availability at [www.hestore.hu](http://www.hestore.hu).

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	LJH 06/22/05'		

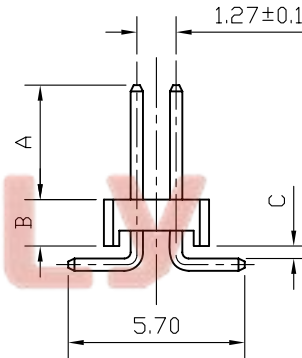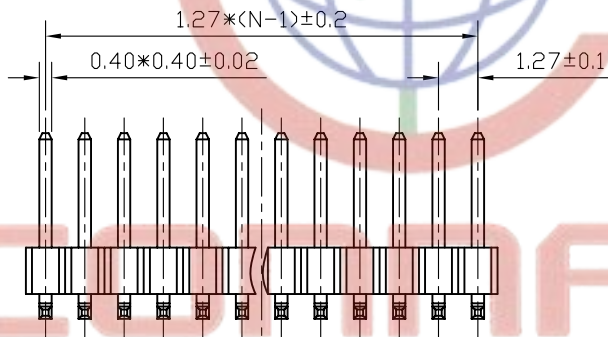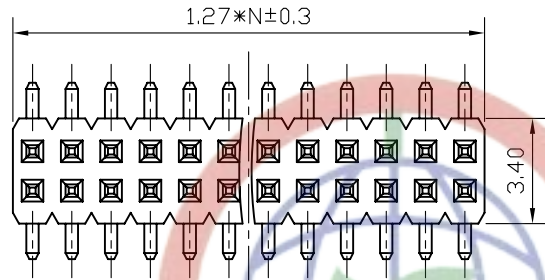

N:NUMBER OF CONTACTS/2

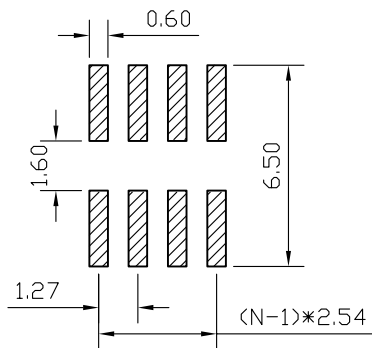


RECOMMEND PCB LAYOUT(TOLERANCE=±0.05)

TYPE	DIM A	DIM C
1	3.70	0.40
2	3.00	0.40
3	3.30	0.20
4	3.30	0.40
5		

NOTES:

- ELECTRICAL CHARACTERISTICS:
  - CONTACT RESISTANCE: 50mΩ Max. INITIAL.
  - DIELECTRIC WITHSTANDING VOLTAGE: 300V AC(rms) FOR 1 MINUTE.
  - INSULATION RESISTANCE: 1000MΩ Min.
- ENVIRONMENT CHARACTERISTICS:
  - OPERATING TEMPERATURE: -40°C~+105°C.
- PART NUMBER: DS1031-08
- PRODUCT NUMBER CODE:

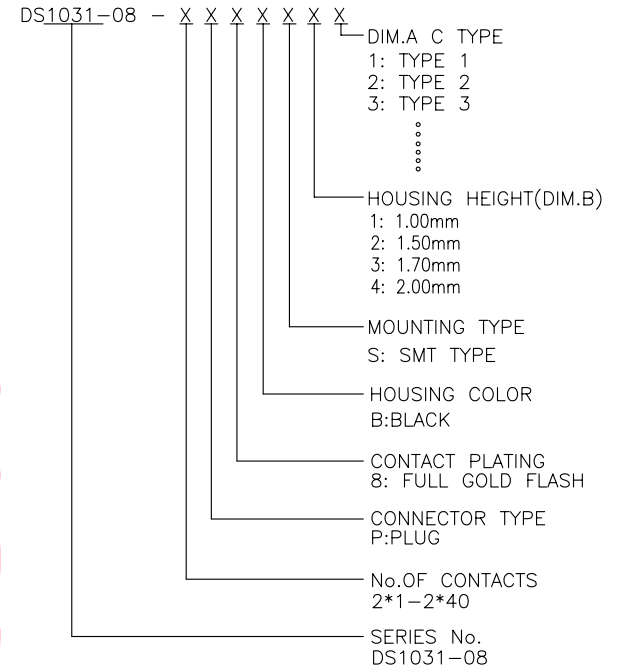

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION	TITLE
X.	±0.60	X.	±5'		PIN HEADER PITCH 1.27mm SMT TYPE
.X	±0.38	.X	±3'	mm	
.XX	±0.25	.XX	±2'	A4	SHEET SIZE
DRAWING TYPE		CUSTOMER		SERIES	DS1031-08 SERIES
SCALE		1:1	SHEET	1 OF 1	
DRAWING NO.		C-DS1031-08-XXXXXXX			



晨翔电子有限公司

CONNFLY CONNFLY ELECTRONIC CO. LTD