



HESTORE.HU

elektronikai alkatrész áruház

EN: This Datasheet is presented by the manufacturer.

Please visit our website for pricing and availability at www.hestore.hu.

Quectel BC66

Compact NB-IoT Module with Ultra-low Power Consumption



BC66 is a high-performance, multi-band NB-IoT module with extremely low power consumption. The ultra-compact 17.7mm × 15.8mm × 2.0mm profile makes it a perfect choice for size sensitive applications. Designed to be compatible with Quectel GSM/GPRS M66 module in the compact and unified form factor, it provides a flexible and scalable platform for migrating from GSM/GPRS to NB-IoT network. BC66 provides abundant external interfaces and protocol stacks and also supports OneNET Cloud platform, providing great convenience for customers' applications.

BC66 adopts surface mounted technology, making it an ideal solution for durable and rugged designs. The low profile and small size of LCC package allow BC66 to be easily embedded into space-constrained applications and provide reliable connectivity with the applications.

Due to compact form factor, ultra-low power consumption and extended temperature range, BC66 is a best choice for a wide range of IoT applications, such as smart metering, bike sharing, smart wearables, smart parking, smart city, security and asset tracking, home appliances, agricultural and environmental monitoring, etc. It is able to provide a complete range of SMS and data transmission services to meet client-side demands.



Key Benefits

- ✓ Compact-sized NB-IoT module
- ✓ LCC package, ultra-low power consumption, super high sensitivity
- ✓ Multi-frequency band and rich external interfaces ensure convenient application
- ✓ Compatible with Quectel GSM/GPRS module, easy for future upgrading
- ✓ Embedded with abundant Internet service protocols
- ✓ Fast time-to-market:
Reference designs, evaluation tools and timely technical support minimize design-in time and development efforts



Compact Size



Multi Frequency Bands



Extended Temperature Range: -40°C ~ +85°C



LCC Package



Multiple Serial Ports



Ultra-low Power Consumption




Quectel Enhanced AT Commands



Embedded Internet Services Protocols

Quectel BC66

Compact NB-IoT Module with Ultra-low Power Consumption

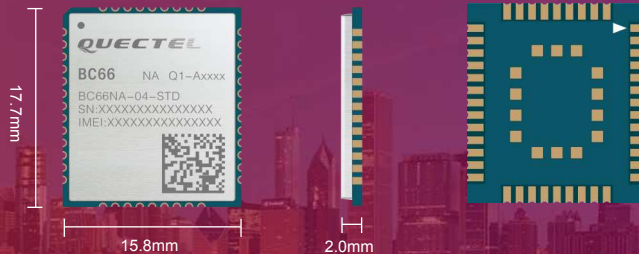

Frequency Bands

B1/B2/B3/B4/B5/B8/B12/B13/B17/B18/B19/
B20/B25/B26/B28/B66

Data

Date Transmission (Experimental Results):

Single-Tone:

16.7kbps (UL)/25.5kbps (DL)

Multi-Tone*:

62.5kbps (UL)/25.5kbps (DL)

Protocol Stacks:

UDP/TCP/CoAP/LWM2M/MQTT

PPP*/SSL*/DTLS*/SNTP*

FTP*/HTTP*/HTTPS*

Firmware Download Methods:

UART

DFOTA*

SMS*

Text/PDU Mode

Electrical Specification

Output Power:

22.5dBm

Sensitivity:

TBD

Power Consumption:

TBD @PSM

TBD @Idle Mode

Interfaces

USIM ×1

SPI ×1

PSM_EINT ×1

UART ×3

ADC * ×1

RESET ×1

PWRKEY ×1

NETLIGHT ×1

Antenna ×1

I2C ×1 (For OpenCPU Version Only)

I2S ×1 (For OpenCPU Version Only)

GPIO: Configurable (For OpenCPU Version Only)

General Features

58 pins

Supply Voltage Range:

2.1V~3.63V, 3.3V Typ.

(GPIO Voltage Domain: 1.8V)

Temperature Range:

-40°C ~ +85°C

Dimension:

17.7mm × 15.8mm × 2.0mm

LCC Package

Weight: 1.2g±0.2g

AT Command:

3GPP Rel.13/14 and Quectel Enhanced AT

Commands

Approvals

CE*/GCF* (Europe)

FCC* (North America)

* Under Development