



HESTORE.HU






elektronikai alkatrész áruház

EN: This Datasheet is presented by the manufacturer.

Please visit our website for pricing and availability at www.hestore.hu.

1 2 3 4 5 6 7 8

A
B
C
D
E
F
G
H

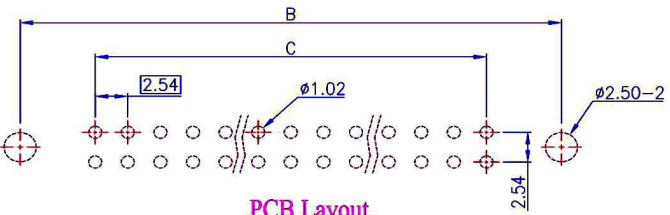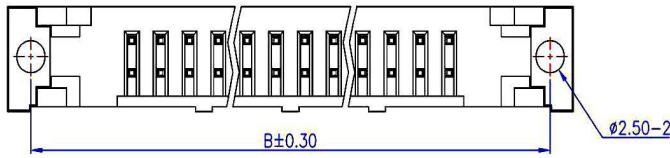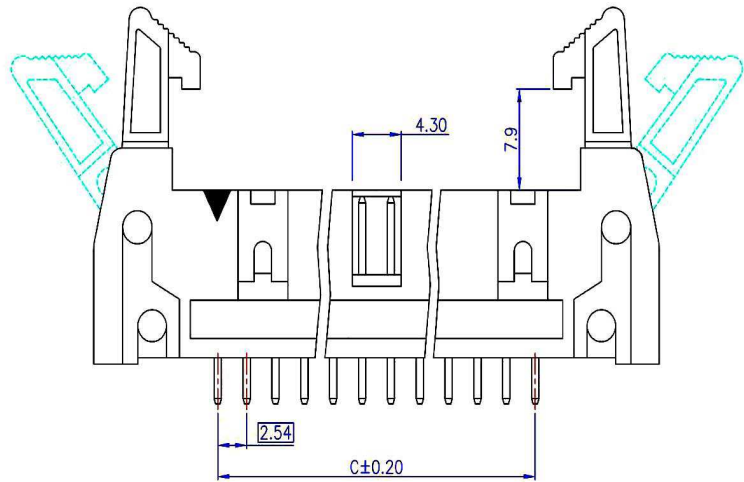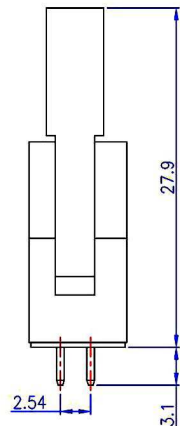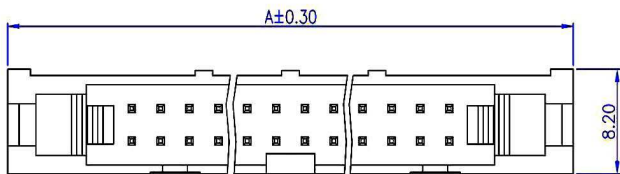

PCB Layout
(Top View)

Material and Finish

- 1. Housing: PBT (UL94V-0), Black.
- 2. Terminal: Sq. 0.64mm Copper Alloy, Gold Plating.

Electrical Characteristics

- 1. Current Rating: 3.0 Amp. Max..
- 2. Dielectric Withstand Voltage:
1000V AC RMS for 60Seconds.
- 3. Insulation Resistance:
1000M Ohms Min. at 1000V DC.

Mechanical Characteristics

- 1. Operating Temperature: -55°C ~ +105°C

Dimensions							
Pos.	A	B	C	Pos.	A	B	C
10	32.00	27.94	10.16	26	52.32	48.26	30.48
12	34.54	30.48	12.70	30	57.40	53.34	35.56
14	37.08	33.02	15.24	34	62.48	58.42	40.64
16	39.62	35.56	17.78	40	70.10	66.04	48.26
20	44.70	40.64	22.86	50	82.80	78.74	60.96
24	49.78	45.72	27.94				

RoHS
Compliant

T&T Connection System Co., Ltd.

APPD. 核准	Betty	 SCALE 比例 参考	TOLERANCE 容許公差	PART NAME 品名 2,54mmX2,54mm BOX HEADER WITH LONG LOCK STRAIGHT TYPE
DWG. 製圖	Betty		.0 ± 0.30 .00 ± 0.20 ANG. ± 3°	
DATE 制表日	2012/11/01	UNIT 單位	M M	PART NO. 料號
		PAGE 張數	1 OF 1	

1 2 3 4 5 6 7 8