




HESTORE.HU

elektronikai alkatrész áruház

EN: This Datasheet is presented by the manufacturer.

Please visit our website for pricing and availability at www.hestore.hu.

AC METALLIZED POLYPROPYLENE FILM CAPACITORS FOR MOTOR APPLICATIONS

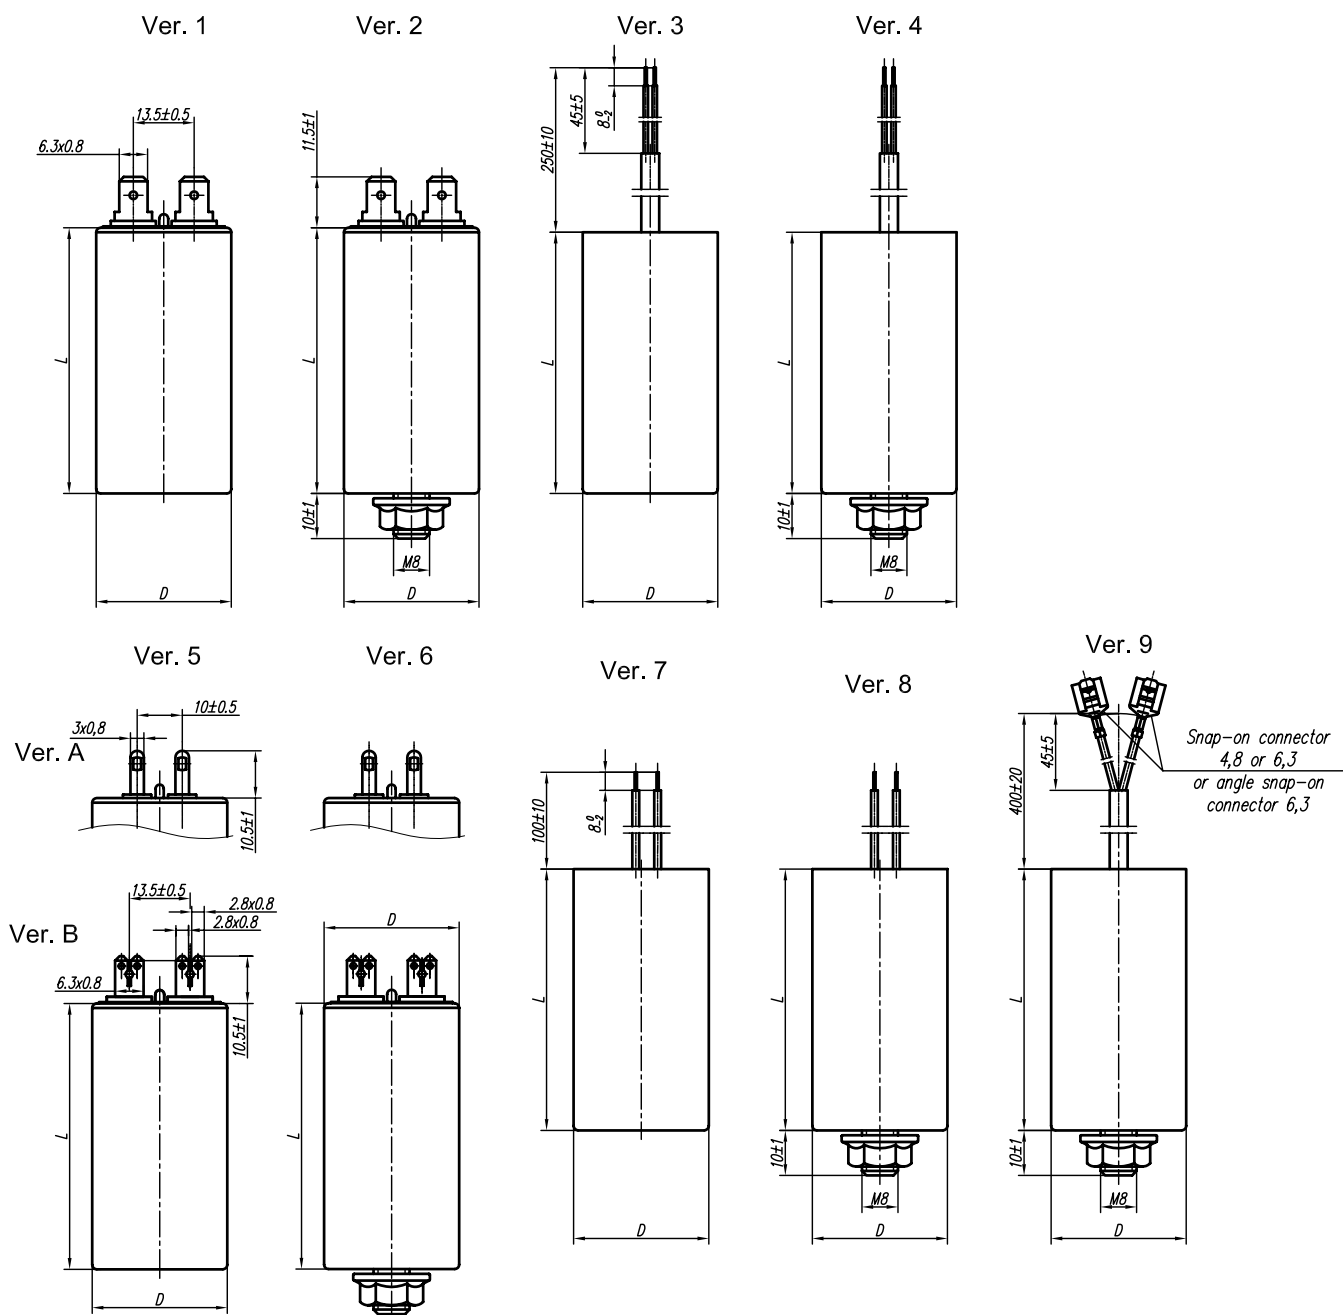

- Version 1 and 2 - capacitor with fast-on terminals according to PN-EN 61210.
Version 3 and 4 - capacitor with two-core cable lead according to PN-91/E-90103.
Version 5 and 6 - capacitor versions:
A - with soldering terminals $3 \times 0,8$
B - with tabs $2 \times 2,8 \times 0,8$ ($6,3 \times 0,8$)
Version 7 and 8 - capacitor with two single-core cable leads.
Version 9 - 2; 2,5; 3; 4; $5 \mu\text{F}$ capacitors with $\pm 10\%$ tolerance and H05V2V2-F 300/500V $2 \times 0,75 \text{mm}^2$ black insulated leads with VDE certificate with 4,8-075U T85 or 6,3-075U T85 snap-on connector or angle snap-on connector FH $6,3 \times 0,8$ -Ms (upon prior agreement).

NOTE:

1. Misalignment of terminals in relation to the capacitor axis may occur in versions 3; 4; 7; 8 and 9; other lengths of leads is available upon prior agreement.

APPLICATION:

The MKSP-5P capacitors are intended for use in a.c. circuits with the frequency of 50Hz. They are mainly used in single-phase electric motors as running capacitors. The capacitors have plastic case.

The MKSP-5P capacitors can be used with a d.c. voltage not exceeding the following value: $V_{dc} = \sqrt{2} * U_n$

 **MIFLEX S.A.**

ZAKŁADY PODZESPOŁÓW RADIOWYCH
GRUNWALDZKA 3, 99-300 KUTNO, POLAND
Telephone: +48 24 355 11 00 ÷ 02
Fax: +48 24 355 11 88
e-mail: miflex@miflex.com.pl

Revision date
25.06.2008

Page
1/2

AC METALLIZED POLYPROPYLENE FILM CAPACITORS FOR MOTOR APPLICATIONS

Application class (acc. to EN 60252-1 and VDE 0560 part 8):

B - expected life 10000h (HSFNT*)

C - expected life 3000h (HSFPU*)

D - expected life 1000h (HSFQV*)

* - previous symbols

TECHNICAL DATA:

- Climatic category: - 25/070/21,
- Dissipation factor: - ≤ 0.003 at $f = 50\text{Hz}$,
- Dielectric strength
 - between terminals: - 2UR - 60s,
 - between terminals and case: - min. 2000V / 50Hz - 60s,
- Standards: - EN 60252-1, VDE 0560 part 8
- Specifications: - WT-96/MIFLEX/MKSP-5P,
- Approval mark: - VDE.

This product fulfils the requirements of the RoHS Directive (2002/95/EC).

Rated capacitance C_N	Capacitance tolerance	Rated voltage, class	Dimensions								VDE approval for voltage and class				
			Ver. 1,2,5,6		Ver. 3,7		Ver. 4,8		Ver. 9						
			D^{+1}	L_{-2}^{+3}	D^{+1}	L_{-2}^{+3}	D^{+1}	L_{-2}^{+3}	D^{+1}	L_{-2}^{+3}					
μF	%	V~	mm	mm	mm	mm	mm	mm	mm	mm					
2	±5 ±10	450V~ B 500V~ D	25	58	25	51	25	53	25	58	450V~ C VDE 500V~ D VDE				
2,5															
3												30	83	30	78
4															
5															
6					35	65	35	65				35	65	35	65
7															
7,5															
8				35	83	35	78	35	78	35		78			
9															
10															
12															
14															
16															
18															
20															
22															
25															
30			450V~ B			50	45	78	45	78		45	78		
32															
35															
40															
45				50	119		50	114	50	114		50			
50															
30															
32															
35			500V~ D	50	50	50	50	50	50	50					
40															
40															
40															

 **MIFLEX S.A.**

ZAKŁADY PODZESPOŁÓW RADIOWYCH
GRUNWALDZKA 3, 99-300 KUTNO, POLAND
Telephone: +48 24 355 11 00 ÷ 02
Fax: +48 24 355 11 88
e-mail: miflex@miflex.com.pl

Revision date
25.06.2008

Page
2/2