



**HESTORE.HU**

elektronikai alkatrész áruház

**EN:** This Datasheet is presented by the manufacturer.

Please visit our website for pricing and availability at [www.hestore.hu](http://www.hestore.hu).

# HF3FA

# SUBMINIATURE HIGH POWER RELAY



File No.: E134517



File No.: 40023708



File No.: CQC12002076529



## Features

- 15A switching capability
- Flammability class according to UL94, V-0
- CTI 250 available
- Product in accordance to IEC 60335-1 available
- 1 Form A and 1 Form C configurations
- Subminiature, standard PCB layout
- UL insulation system: Class F
- Environmental friendly product (RoHS compliant)
- Outline Dimensions: (19.0 x 15.5 x 15.5) mm

## CONTACT DATA

|                               |   |   |           |
|-------------------------------|---|---|-----------|
| Contact arrangement           | 1A  | 1C  |           |
|                               |   | NO  | NC        |
| Contact resistance            | 100mΩ max.(at 1A 6VDC)  |   |           |
| Contact material              | AgSnO <sub>2</sub>  |   |           |
| Contact rating<br>(Res. load) | 10A 277VAC<br>10A 28VDC   | 10A 277VAC <sup>1)</sup><br>10A 28VDC <sup>1)</sup> | 5A 250VAC |
| Max. switching voltage        | 277VAC/28VDC  |   | 250VAC    |
| Max. switching current        | 15A   | 10A   | 5A        |
| Max. switching power          | 2770VA /280W  |   |           |
| Mechanical endurance          | 1 x 10 <sup>7</sup> OPS   |   |           |
| Electrical endurance          | H type:1 x 10 <sup>5</sup> OPS<br>(10A 250VAC Resistive load,<br>Room temp., 3s on 3s off)            |   |           |
|                               | Z type:5 x 10 <sup>4</sup> OPS<br>(NO: 5A/NC: 5A 250VAC, Resistive load,<br>Room temp., 5s on 5s off) |   |           |

Notes: 1) Applicable when NC is not energized with load.

## CHARACTERISTICS

|                               |                                 |                     |
|-------------------------------|---------------------------------|---------------------|
| Insulation resistance         | 100MΩ (at 500VDC)               |                     |
| Dielectric strength           | Between coil & contacts         | 2500VAC 1min        |
|                               | Between open contacts           | 750VAC 1min         |
| Operate time (at nomi. volt.) | 10ms max.                       |                     |
| Release time (at nomi. volt.) | 5ms max.                        |                     |
| Shock resistance              | Functional                      | 98m/s <sup>2</sup>  |
|                               | Destructive                     | 980m/s <sup>2</sup> |
| Vibration resistance          | 10Hz to 55Hz 1.5mm DA           |                     |
| Humidity                      | 5% to 85% RH                    |                     |
| Ambient temperature           | -40°C to 85°C                   |                     |
| Termination                   | PCB                             |                     |
| Unit weight                   | Approx. 7.0g                    |                     |
| Construction                  | Plastic sealed,<br>Flux proofed |                     |

Notes: 1) The data shown above are initial values.

## COIL

Coil power Approx. 360mW

## COIL DATA

at 23°C

| Nominal Voltage VDC | Pick-up Voltage VDC max. | Drop-out Voltage VDC min. | Max. Voltage VDC * | Coil Resistance Ω |
|---------------------|--------------------------|---------------------------|--------------------|-------------------|
| 3                   | 2.25                     | 0.3                       | 3.9                | 25 x (1±10%)      |
| 5                   | 3.75                     | 0.5                       | 6.5                | 70 x (1±10%)      |
| 6                   | 4.50                     | 0.6                       | 7.8                | 100 x (1±10%)     |
| 9                   | 6.75                     | 0.9                       | 11.7               | 225 x (1±10%)     |
| 12                  | 9.00                     | 1.2                       | 15.6               | 400 x (1±10%)     |
| 15                  | 11.25                    | 1.5                       | 19.5               | 625 x (1±10%)     |
| 18                  | 13.5                     | 1.8                       | 23.4               | 900 x (1±10%)     |
| 24                  | 18.0                     | 2.4                       | 31.2               | 1600 x (1±10%)    |
| 48                  | 36.0                     | 4.8                       | 54.4               | 6400 x (1±10%)    |

Notes: \*Maximum voltage refers to the maximum voltage which relay coil could endure in a short period of time.

## SAFETY APPROVAL RATINGS

|        |          |  |
|--------|----------|--|
| UL/CUL | 1 Form A | 10A 250VAC at 85°C<br>8A 277VAC at 85°C<br>6A 250VAC at 105°C<br>15A 125VAC<br>TV-5 120VAC |
|        | 1 Form C | NO/NC: 5A/5A 277VAC at 85°C  |
| VDE    | 1 Form A | 6A 250VAC at 105°C<br>10A 250VAC at 85°C   |
|        | 1 Form C | NO: 10A 250VAC at 85°C<br>NO: 6A 250VAC at 105°C<br>NO/NC: 5A/5A 250VAC at 85°C            |

- Notes: 1) All values unspecified are at room temperature.  
2) Only typical loads are listed above. Other load specifications can be available upon request.  
3) For sealed type, the vent-hole cover should be excised.



HONGFA RELAY

ISO9001, ISO/TS16949, ISO14001, OHSAS18001, IECQ QC 080000 CERTIFIED

2016 Rev. 1.00


## ORDERING INFORMATION

|                            |                                   |                   |  |
|----------------------------|-----------------------------------|-------------------|--|
| Type                       | HF3FA / 012 -H S T F (XXX)        |                   |  |
| Coil voltage               | 3, 5, 6, 9, 12, 18, 24, 48VDC     |                   |  |
| Contact arrangement        | H: 1 Form A                       | Z: 1 Form C       |  |
| Construction <sup>1)</sup> | S: Plastic sealed                 | Nil: Flux proofed |  |
| Contact material           | T: AgSnO <sub>2</sub>             | Nil: AgCdO        |  |
| Insulation system          | F: Class F                        |                   |  |
| Special code <sup>3)</sup> | XXX: Customer special requirement | Nil: Standard     |  |

- Notes:** 1) We recommend flux proofed types for a clean environment (free from contaminations like H<sub>2</sub>S, SO<sub>2</sub>, NO<sub>2</sub>, dust, etc.). We suggest to choose plastic sealed types and validate it in real application for an unclean environment (with contaminations like H<sub>2</sub>S, SO<sub>2</sub>, NO<sub>2</sub>, dust, etc).
- 2) Contact is recommended for suitable condition and specifications if water cleaning or surface process is involved in assembling relays on PCB.
- 3) The customer special requirement express as special code after evaluating by Hongfa. e.g.(335) stands for product in accordance to IEC 60335-1 (GWT).

## OUTLINE DIMENSIONS, WIRING DIAGRAM AND PC BOARD LAYOUT


Unit: mm

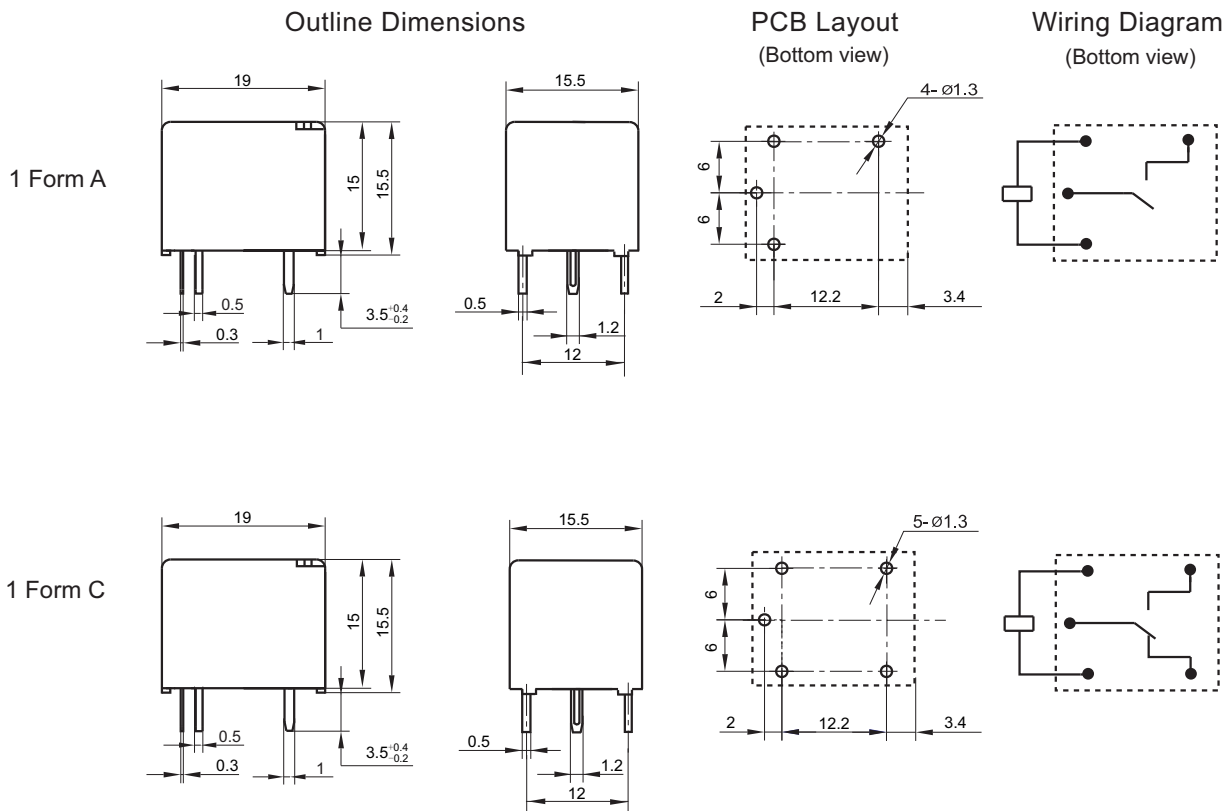


- Remark: 1) In case of no tolerance shown in outline dimension: outline dimension  $\leq 1$ mm, tolerance should be  $\pm 0.2$ mm; outline dimension  $> 1$ mm and  $\leq 5$ mm, tolerance should be  $\pm 0.3$ mm; outline dimension  $> 5$ mm, tolerance should be  $\pm 0.4$ mm.
- 2) The tolerance without indicating for PCB layout is always  $\pm 0.1$ mm.

## CHARACTERISTIC CURVES

MAXIMUM SWITCHING POWER

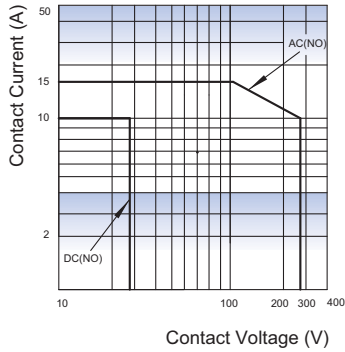

ENDURANCE CURVE

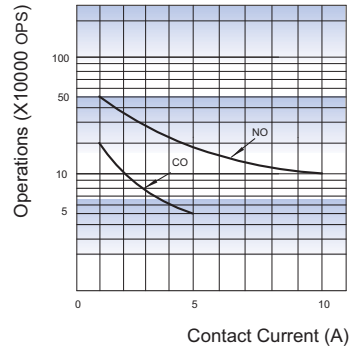


**Test conditions:**

NO: Resistive load, Flux proofed,  
Room temp., 1s on 9s off

CO: Resistive load, Flux proofed,  
Room temp., 3s on 3s off

COIL TEMPERATURE RISE

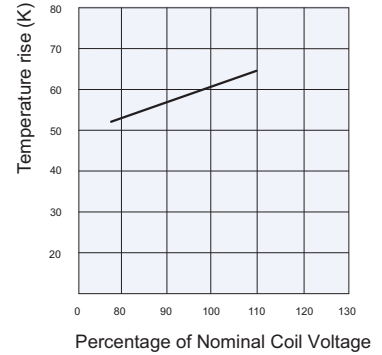

Test conditions: at 85°C, 6A  
Mounting distance: 10mm

**Disclaimer**

The specification is for reference only. See to "Terminology and Guidelines" for more information. Specifications subject to change without notice. We could not evaluate all the performance and all the parameters for every possible application. Thus the user should be in a right position to choose the suitable product for their own application. If there is any query, please contact Hongfa for the technical service. However, it is the user's responsibility to determine which product should be used only.