



HESTORE.HU

elektronikai alkatrész áruház


EN: This Datasheet is presented by the manufacturer.

Please visit our website for pricing and availability at www.hestore.hu.

Specification:

- 1) Rating: 3 A 125 VAC; 1 A 250 VAC
- 2) Contact Resistance: 20 mΩ max.
- 3) Insulation Resistance: 500 VDC 1000 MΩ min.
- 4) Dielectric strength: 1500 VAC, 1 minute
- 5) Operating Temperature: -20°C ~ +65°C
- 6) Electrical Life: 20000 cycles

TSSM1022C3F

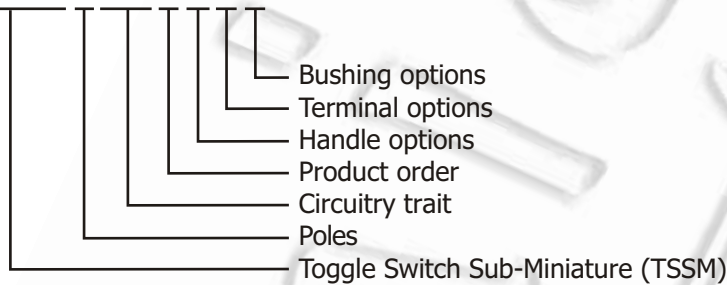


CIRCUITRY TRAIT

01	ON	-	OFF
02	ON	-	ON
03	ON	OFF	ON
13	ON	OFF	(ON)


() indicates momentary

HANDLE OPTIONS

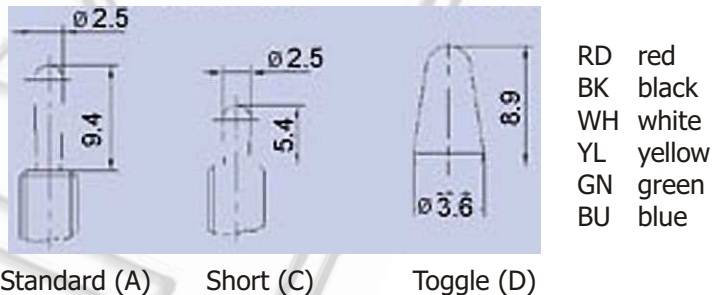


Standard (A) Short (C) Toggle (D)


NAMEPLATE

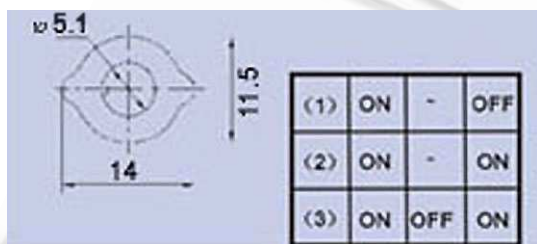

BUSHING OPTIONS

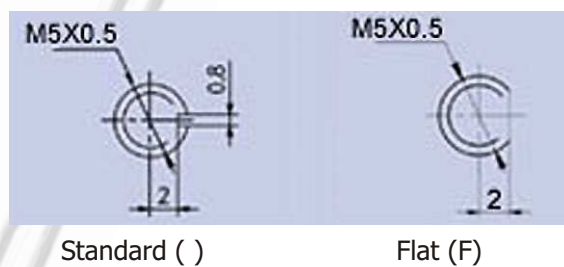

TERMINAL OPTIONS

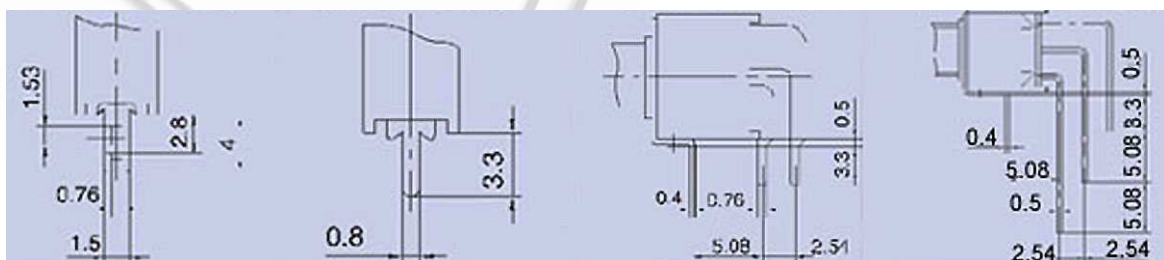


Solder terminal (1) PC terminal (2) PC-H terminal (3) PC-V terminal (4)


Ninigi




TSSM101 ON-OFF
SPST 2P

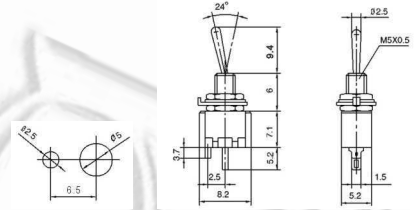


TSSM102 ON-ON
SPDT 3P

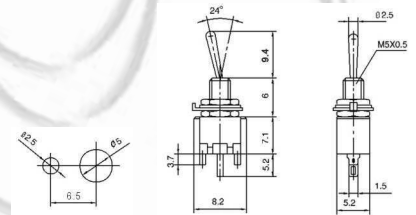


TSSM202 ON-ON
DPDT 6P

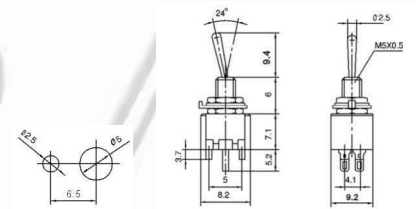


TSSM101A2 ON-OFF
SPST 2P

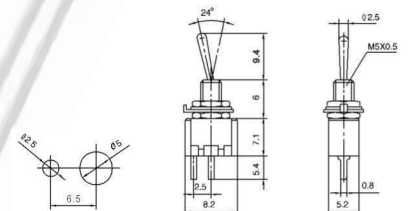

TSSM102A2 ON-ON
SPDT 3P

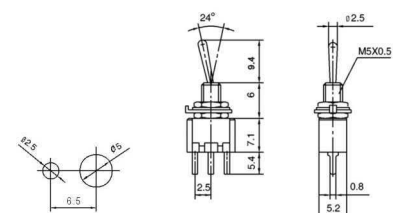


TSSM202A2 ON-ON
DPDT 6P

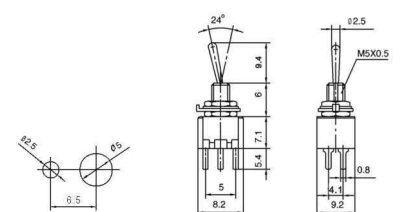


Ninigi




TSSM1012A1 ON-OFF
SPST 2P

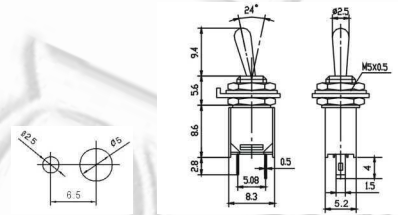


TSSM1012A5 ON-OFF
SPST 2P

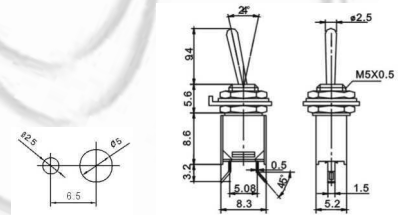


TSSM1022A1 ON-ON
TSSM1032A1 ON-OFF-ON
SPDT 3P

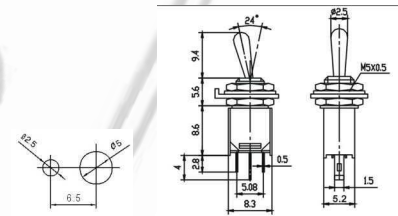


TSSM2022A1 ON-ON
TSSM2032A1 ON-OFF-ON
DPDT 6P

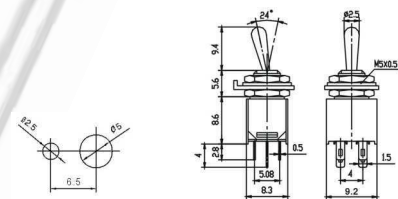

TSSM1012C2T ON-OFF
SPST 2P

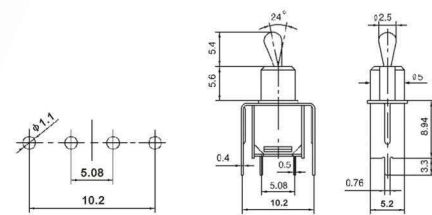


TSSM1022C2T ON-ON
TSSM1032C2T ON-OFF-ON
SPDT 3P

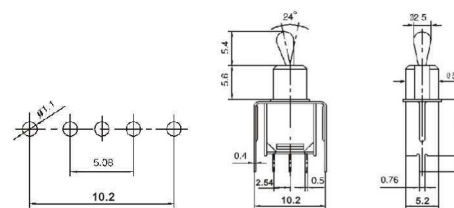


Ninigi




TSSM2022C2T ON-ON
TSSM2032C2T ON-OFF-ON
 DPDT 6P

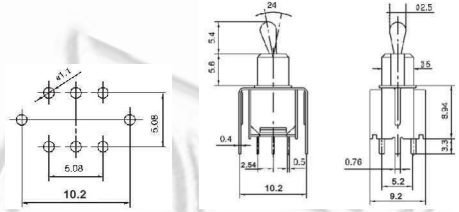


TSSM1022C3 ON-ON
TSSM1032C3 ON-OFF-ON
 SPDT 3P

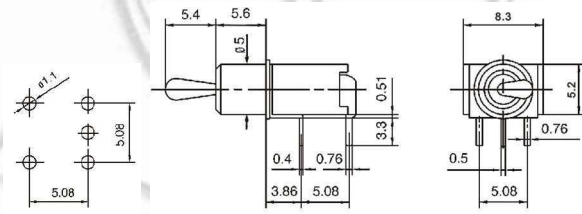


TSSM2022C3 ON-ON
TSSM2032C3 ON-OFF-ON
 DPDT 6P

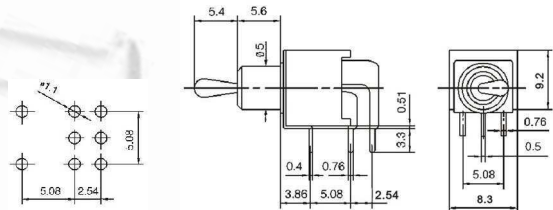

TSSM1012C4 ON-OFF
 SPST 2P

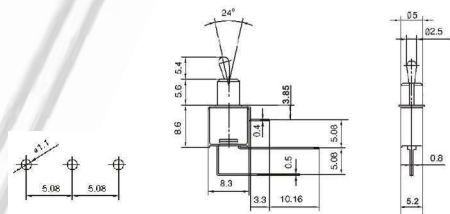

TSSM1022C4 ON-ON
TSSM1032C4 ON-OFF-ON
 SPDT 3P

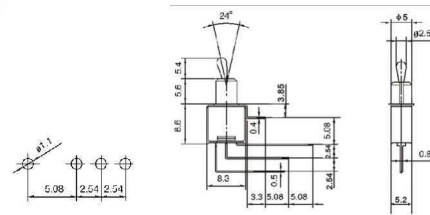

TSSM2022C4 ON-ON
TSSM2032C4 ON-OFF-ON
 DPDT 6P

