




HESTORE.HU

elektronikai alkatrész áruház


EN: This Datasheet is presented by the manufacturer.

Please visit our website for pricing and availability at www.hestore.hu.

DIMENSION: (UNIT:mm/inches)

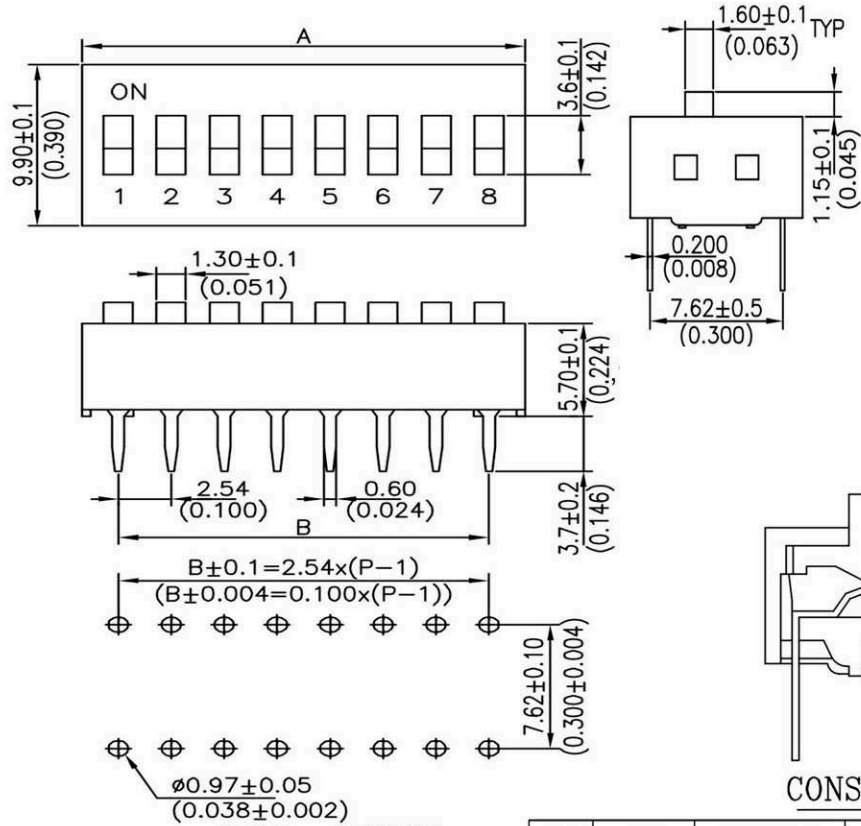

P.C.B. LAYOUT

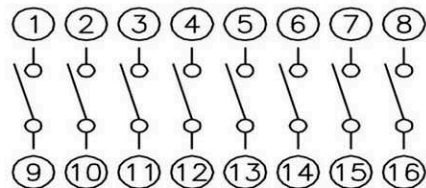

CIRCUIT DIAGRAM

CONSTRUCTION

ITEM	DES	MATERIALS	TREATMENT
1	ACTUATOR	UL94V-0 PBT THERMOPLASTIC	WHITE
2	COVER	UL94V-0 PBT THERMOPLASTIC	RED
3	BASE	UL94V-0 PBT THERMOPLASTIC	BLACK
4	TERMINAL	PHOSPHOR BRONZE	GOLD PLATING
5	POTTING	EXPOXY	BLACK

NO.OF POS	DIM.A	DIM.B
03	8.92(0.351)	5.08(0.200)
04	11.16(0.439)	7.62(0.300)
05	13.70(0.539)	10.16(0.400)
06	16.24(0.639)	12.70(0.500)
07	19.08(0.751)	15.24(0.600)
08	21.32(0.839)	17.78(0.700)
09	24.16(0.951)	20.32(0.800)
10	26.40(1.039)	22.86(0.900)
12	31.48(1.239)	27.94(1.100)

ELECTRICAL

1. Electrical Life: 2000 operation cycles per switch 24VDC, 25mA.
2. Non-switching Rating: 100mA, 50VDC.
3. Switching Rating: 25mA, 24VDC.
4. Contact Resistance: (a) 50mΩ max. at initial.
(b) 100mΩ max. after life test.
5. Insulation Resistance: 100MΩ min. at 500VDC.
6. Dielectric Strength: 500VAC/1 minute.

MECHANICAL

1. Mechanical life: 2000 operations per switch.
2. Operation Force: 800gf max.
3. Stroke: 2.0mm.
4. Operation Temp: - 25°C to 70°C
5. Storage Temp: - 40°C to 85°C

RoHS Compliant

T&T Connection System Co., Ltd.

APPD. 标准	☉	TOLERANCE 容許公差	PART NAME 品名
DWG. 製圖 Betty	SCALE 比例 參考	0 ± 0.35 .00 ± 0.25 ANG. ± 3°	SLIDE TYPE DIP SWITCH
DATE 制表日 2017/10/31	UNIT 單位 MM	SIZE 板線尺寸 A4	PART NO. 料號 SDIP-xx
	PAGE 張數 1 OF 1	REV. 版本 C	