



HESTORE.HU

elektronikai alkatrész áruház

EN: This Datasheet is presented by the manufacturer.

Please visit our website for pricing and availability at www.hestore.hu.

HFD2

SUBMINIATURE DIP RELAY



File No.:E133481



File No.:CQC13002095174(Single side stable)
CQC13002095175(Latching)



Features

- High sensitive: 150mW
- Matching standard 16 pin IC socket
- High switching capacity: 125VA / 90W
- Bifurcated contacts
- Epoxy sealed for automatic wave soldering and cleaning
- Single side stable and latching type available
- Environmental friendly product (RoHS compliant)
- Outline Dimensions: (20.2 x 10.2 x 10.6) mm

CONTACT DATA

| | |
|------------------------------------|---|
| Contact arrangement | 2C |
| Contact resistance | 100mΩ max. (at 10mA 30mVDC) |
| Contact material | see ordering info. |
| Contact rating (Res. load) | 1A 125VAC, 2A 30VDC 3A 30VDC |
| Max. switching voltage | 250VAC / 220VDC |
| Max. switching current | 3A |
| Max. switching power | 125VA / 90W |
| Min. applicable load ¹⁾ | 10mV 10μA |
| Mechanical endurance | 1 x 10 ⁸ OPS |
| Electrical endurance ²⁾ | 5 x 10 ⁴ OPS (2A 30VDC, Ag contact, Resistive load, at 70°C, 1s on 9s off) |

Notes: 1) Min. applicable load is reference value. Please perform the confirmation test with the actual load before production since reference value may change according to switching frequencies, environmental conditions and expected contact resistance and reliability.

2) Electric endurance data are collected in one pair CO contact test.

COIL

| Coil power | | Sensitive | Standard |
|------------------|--------------------|---------------|---------------|
| | Single side stable | Approx. 150mW | Approx. 200mW |
| 1 coil latching | Approx. 75mW | Approx. 100mW | |
| 2 coils latching | Approx. 150mW | Approx. 200mW | |
| Temperature rise | 65K max. | | |

SAFETY APPROVAL RATINGS

| UL/CUL | AgPd/ AgPd+Gold plated | 0.5A 60VDC 2A 30VDC 1A 120VAC 2A 125VAC 3A 30VDC |
|--------|-----------------------------------|--|
| | Ag+Gold plated/ Ag+Gold plated | 2A 30VDC(at 70°C) |

Notes: 1) All values unspecified are at room temperature.

2) Only typical loads are listed above. Other load specifications can be available upon request.

CHARACTERISTICS

| | | |
|-------------------------------|-------------------------|---|
| Insulation resistance | 1000MΩ (at 500VDC) | |
| Dielectric strength | Between coil & contacts | 1 coil: 1500VAC 1min 2 coils: 1000VAC 1min |
| | Between open contacts | 1000VAC 1min |
| Operate time (at nomi. volt.) | 4.5ms max. | |
| Release time (at nomi. volt.) | 3.5ms max. | |
| Set time (latching) | 4.5ms max. | |
| Reset time (latching) | 4.5ms max. | |
| Ambient temperature | -40 °C to 85 °C | |
| Humidity | 5% to 85% RH | |
| Vibration resistance | 10Hz to 55Hz 1.5mm DA | |
| Shock resistance | Functional | 490m/s ² |
| | Destructive | 980m/s ² |
| Termination | PCB (DIP) | |
| Unit weight | Approx. 4.5g | |
| Construction | Plastic sealed | |

Notes: 1) The data shown above are initial values.

2) UL insulation system: Class A

COIL DATA

at 23°C

Single side stable Standard type

| Coil Code | Nominal Voltage VDC | Pick-up Voltage VDC max. | Drop-out Voltage VDC min. | Coil Resistance x(1±10%) Ω | Max. Voltage VDC |
|-----------|---------------------|--------------------------|---------------------------|----------------------------|------------------|
| 003-M | 3 | 2.30 | 0.3 | 45 | 6 |
| 005-M | 5 | 3.75 | 0.5 | 125 | 10 |
| 006-M | 6 | 4.50 | 0.6 | 180 | 12 |
| 009-M | 9 | 6.75 | 0.9 | 405 | 18 |
| 012-M | 12 | 9.00 | 1.2 | 720 | 24 |
| 015-M | 15 | 11.25 | 1.5 | 1125 | 30 |
| 024-M | 24 | 18.0 | 2.4 | 2880 | 48 |
| 048-M | 48 | 36.0 | 4.8 | 11520 | 96 |



HONGFA RELAY

ISO9001, ISO/TS16949, ISO14001, OHSAS18001, IECQ QC 080000 CERTIFIED

2016 Rev. 1.01

COIL DATA

at 23°C

Single side stable Sensitive type

| Coil Code | Nominal Voltage VDC | Pick-up Voltage VDC max. | Drop-out Voltage VDC min. | Coil Resistance x(1±10%) Ω | Max. Voltage VDC |
|-----------|---------------------|--------------------------|---------------------------|----------------------------|------------------|
| 005-S | 5 | 4.0 | 0.5 | 167 | 11.5 |
| 006-S | 6 | 4.8 | 0.6 | 240 | 13.8 |
| 009-S | 9 | 7.2 | 0.9 | 540 | 20.8 |
| 012-S | 12 | 9.6 | 1.2 | 960 | 27.7 |
| 015-S | 15 | 12.0 | 1.5 | 1500 | 34.6 |
| 024-S | 24 | 19.2 | 2.4 | 3840 | 55.4 |

1 coil latching Standard type

| Coil Code | Nominal Voltage VDC | Set / Reset Voltage VDC max. | Coil Resistance x(1±10%) Ω | Max. Voltage VDC |
|-----------|---------------------|------------------------------|----------------------------|------------------|
| 003-M-L1 | 3 | 2.25 | 90 | 8.4 |
| 005-M-L1 | 5 | 3.75 | 250 | 14 |
| 006-M-L1 | 6 | 4.5 | 360 | 17 |
| 009-M-L1 | 9 | 6.75 | 810 | 25 |
| 012-M-L1 | 12 | 9.0 | 1440 | 34 |
| 015-M-L1 | 15 | 11.25 | 2220 | 42 |
| 024-M-L1 | 24 | 18.0 | 4000 | 56 |

2 coils latching Standard type

| Coil Code | Nominal Voltage VDC | Set / Reset Voltage VDC max. | Coil Resistance x(1±10%) Ω | Max. Voltage VDC |
|-----------|---------------------|------------------------------|----------------------------|------------------|
| 003-M-L2 | 3 | 2.25 | 45 | 6 |
| 005-M-L2 | 5 | 3.75 | 125 | 10 |
| 006-M-L2 | 6 | 4.5 | 180 | 12 |
| 009-M-L2 | 9 | 6.75 | 405 | 18 |
| 012-M-L2 | 12 | 9.0 | 720 | 24 |
| 015-M-L2 | 15 | 11.25 | 1125 | 30 |
| 024-M-L2 | 24 | 18.0 | 2040 | 48 |

1 coil latching Sensitive type

| Coil Code | Nominal Voltage VDC | Set / Reset Voltage VDC max. | Coil Resistance x(1±10%) Ω | Max. Voltage VDC |
|-----------|---------------------|------------------------------|----------------------------|------------------|
| 003-S-L1 | 3 | 2.4 | 60 | 6.9 |
| 005-S-L1 | 5 | 4.0 | 330 | 16 |
| 006-S-L1 | 6 | 4.8 | 480 | 19 |
| 009-S-L1 | 9 | 7.2 | 1080 | 29 |
| 012-S-L1 | 12 | 9.6 | 1920 | 39 |
| 015-S-L1 | 15 | 12.0 | 3000 | 43 |
| 024-S-L1 | 24 | 19.2 | 7680 | 78 |

2 coils latching Sensitive type

| Coil Code | Nominal Voltage VDC | Set / Reset Voltage VDC max. | Coil Resistance x(1±10%) Ω | Max. Voltage VDC |
|-----------|---------------------|------------------------------|----------------------------|------------------|
| 003-S-L2 | 3 | 2.4 | 60 | 6.9 |
| 005-S-L2 | 5 | 4.0 | 167 | 11.5 |
| 006-S-L2 | 6 | 4.8 | 240 | 13.8 |
| 009-S-L2 | 9 | 7.2 | 540 | 20.8 |
| 012-S-L2 | 12 | 9.6 | 960 | 27.7 |
| 015-S-L2 | 15 | 12.0 | 1500 | 34.6 |
| 024-S-L2 | 24 | 19.2 | 3840 | 55.4 |

Notes: 1) When user's requirements can't be found in the above table, special order allowed.

2) In case 5V of transistor drive circuit, it is recommended to use 4.5V type relay, and 3V to use 2.4V type relay.

TYPICAL CONTACT LIFE EXPECTANCY

| Voltage | Power | Electrical endurance | |
|---------|-------|-------------------------|----------------------------------|
| | | Resistive Load | Inductive Load (For AC cosφ=0.7) |
| 50mVDC | 50μW | 5 x 10 ⁷ OPS | 5 x 10 ⁷ OPS |
| 30VDC | 20W | 3 x 10 ⁶ OPS | 1 x 10 ⁶ OPS |
| 30VDC | 30W | 1 x 10 ⁶ OPS | 3 x 10 ⁵ OPS |
| 30VDC | 60W | 1 x 10 ⁵ OPS | 1.5 x 10 ⁴ OPS |
| 60VDC | 20W | 3 x 10 ⁶ OPS | -- |
| 60VDC | 30W | 5 x 10 ⁵ OPS | -- |
| 60VDC | 60W | 1 x 10 ⁵ OPS | -- |
| 30VAC | 40VA | 3 x 10 ⁶ OPS | 1 x 10 ⁶ OPS |
| 30VAC | 80VA | 1 x 10 ⁶ OPS | 3 x 10 ⁵ OPS |
| 30VAC | 120VA | 1 x 10 ⁵ OPS | 1.5 x 10 ⁴ OPS |
| 60VAC | 40VA | 3 x 10 ⁶ OPS | 1 x 10 ⁶ OPS |
| 60VAC | 80VA | 1 x 10 ⁶ OPS | 3 x 10 ⁵ OPS |
| 60VAC | 120VA | 1 x 10 ⁵ OPS | 1.5 x 10 ⁴ OPS |
| 125VAC | 40VA | 3 x 10 ⁶ OPS | 1 x 10 ⁶ OPS |
| 125VAC | 80VA | 1 x 10 ⁶ OPS | 3 x 10 ⁵ OPS |
| 125VAC | 125VA | 1 x 10 ⁵ OPS | 1.5 x 10 ⁴ OPS |

ORDERING INFORMATION

| | | | |
|----------------------------|--|----------------------|-------------------------|
| Type | HFD2 / 012 -S -L2 -A (XXX) | | |
| Coil voltage | 3, 5, 6, 9, 12, 15, 24, 48VDC ¹⁾ | | |
| Coil power | M: Standard | S: Sensitive | |
| Sort | L1: 1 coil latching | L2: 2 coils latching | Nil: Single side stable |
| Contact material | A: AgPd/AgPd+Gold plated D: Ag+Gold plated/Ag+Gold plated Nil: AgPd/Ag+Gold plated ²⁾ | | |
| Special code ³⁾ | XXX: Customer special requirement | Nil: Standard | |


Notes: 1) 48VDC coil voltage is only for single side stable & standard type.

2) Not for new design.

3) The customer special requirement express as special code after evaluating by Hongfa.

OUTLINE DIMENSIONS, WIRING DIAGRAM AND PC BOARD LAYOUT

Unit: mm

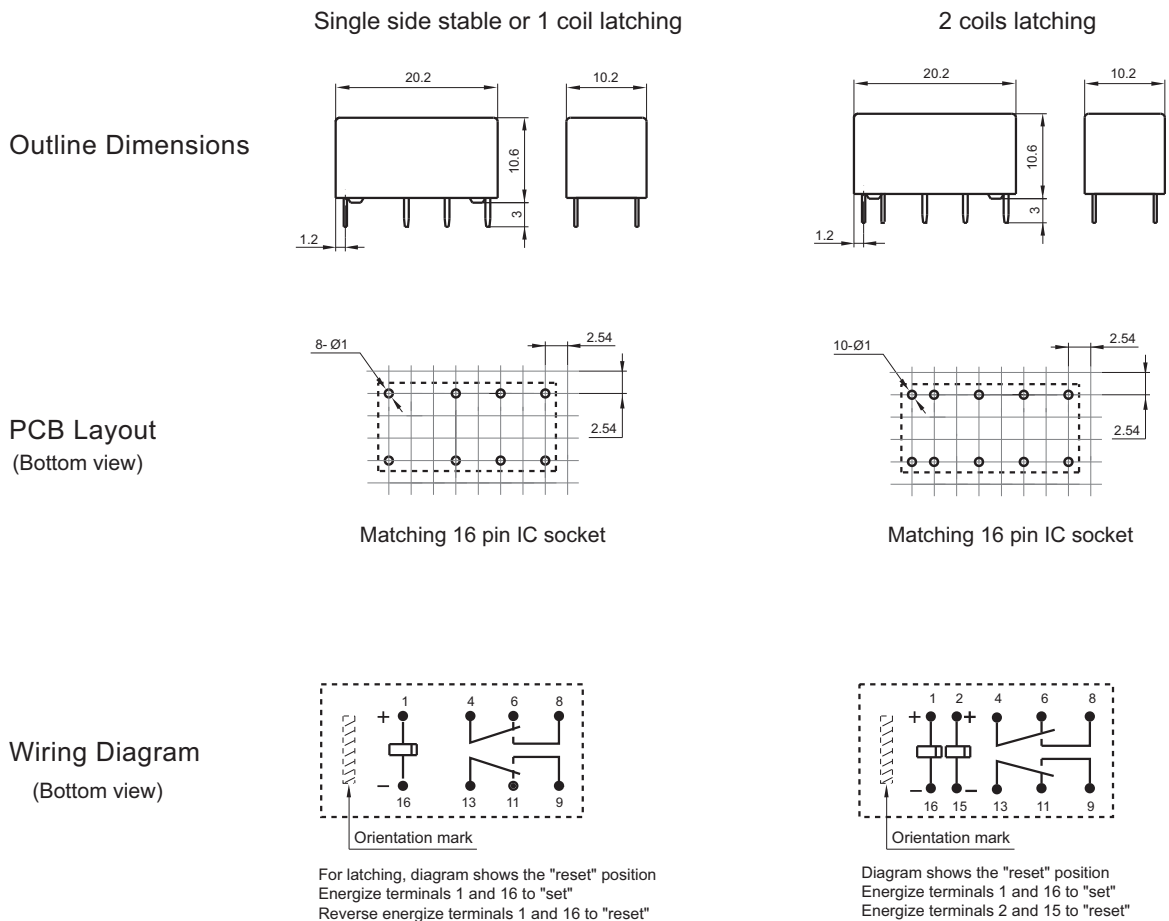


Remark: 1) In case of no tolerance shown in outline dimension: outline dimension ≤ 1 mm, tolerance should be ± 0.2 mm; outline dimension > 1 mm and ≤ 5 mm, tolerance should be ± 0.3 mm; outline dimension > 5 mm, tolerance should be ± 0.4 mm.

2) The tolerance without indicating for PCB layout is always ± 0.1 mm.

3) The width of the gridding is 2.54mm.

CHARACTERISTIC CURVES


MAXIMUM SWITCHING POWER

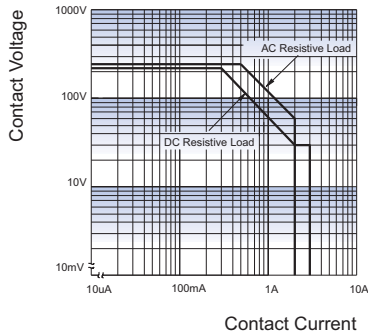

Test conditions:

Resistive load, at 70°C, 1s on 9s off.

COIL TEMPERATURE RISE

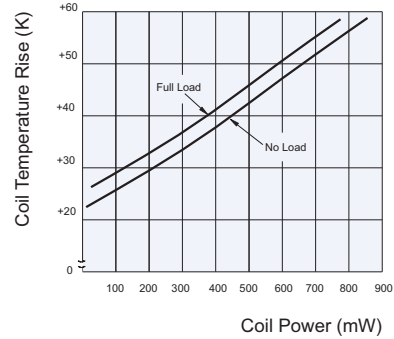

Notice

- 1) This relay is highly sensitive polarized relay, if correct polarity is not applied to the coil terminals, the relay does not operate properly.
- 2) To avoid using relays under strong magnetic field which will change the parameters of relays such as pick-up voltage and drop-out voltage.
- 3) Relay is on the "reset" status when being released from stock, with the consideration of shock risen from transit and relay mounting, it should be changed to the "set" status when application(connecting to the power supply). Please reset the relay to "set" or "reset" status on request.
- 4) Energizing coil with rated voltage is basic for normal operation of a relay, please make sure the energized voltage to relay coil have reached the rated voltage. Regarding latching relay, in order to maintain the "set" or "reset" status, impulse width of the rated voltage applied to coil should be more than 5 times of "set" or "reset" time.
- 5) For 2 coil latching relay, do not energize voltage to "set" coil and "reset" coil simultaneously.
- 6) The relay may be damaged because of falling or when shocking conditions exceed the requirement.
- 7) Contact is recommended for suitable condition and specifications if water cleaning or surface process is involved in assembling relays on PCB.
- 8) Regarding the plastic sealed relay, we should leave it cooling naturally until below 40°C after welding, then clean it and deal with coating, remarkably the temperature of solvents should also be controlled below 40°C. Please avoid cleaning the relay by ultrasonic, avoid using the solvents like gasoline, Freon, and so on, which would affect the configuration of relay or influence the environment.
- 9) About preferable condition of operation, storage and transportation, please refer to "Explanation to terminology and guidelines of relay".

Disclaimer

The specification is for reference only. See to "Terminology and Guidelines" for more information. Specifications subject to change without notice. We could not evaluate all the performance and all the parameters for every possible application. Thus the user should be in a right position to choose the suitable product for their own application. If there is any query, please contact Hongfa for the technical service. However, it is the user's responsibility to determine which product should be used only.

© Xiamen Hongfa Electroacoustic Co., Ltd. All rights of Hongfa are reserved.