



**HESTORE.HU**  
elektronikai alkatrész áruház

**EN:** This Datasheet is presented by the manufacturer.

Please visit our website for pricing and availability at [www.hestore.hu](http://www.hestore.hu).

## RFM210LCF-S1 ASK/OOK Wireless Receiver Module

### 1. General Information

RFM210LCF-S1 is a ASK/OOK wireless data receiver, ultra low power consumption, high sensitivity, long distance communication, cost-effective ASK/OOK RF receiver module, suitable for ISM band wireless applications.

It has the characteristics of good anti-interference and high reliability, and it cannot be affected the working distance even in the situation of complex interference environment.

The Module is provided by two versions base on 315MHz and 433.92MHz, both of them support 1~5kbps data rate. Users only need to attach a simple data decoding circuit to achieve the development of wireless products easily.



**RFM210LCF-S1**

### 2. Features


- Comply with FCC and ETSI
- Strong anti-interference ability, suitable for complex interference environment
- Receiving Sensibility: -114dBm
- Working Frequency:315MHz, 433.92MHz
- Supply Voltage Range:1.8V-3.6V
- Working Current:3.9mA
- Sleeping Current:≤1uA
- Data Rate:1-5 kbps

### 3. Application

- Remote Entrance Guard
- Battery Car Security System
- Remote Socket
- Remote Doorbell
- Wireless Data Transmission
- Wireless Lighting Control
- Remote Control Toys
- Remote Control Home Appliances
- Wireless Alarming & Security System

## 4. Pin definition

### RFM210LCF-S1

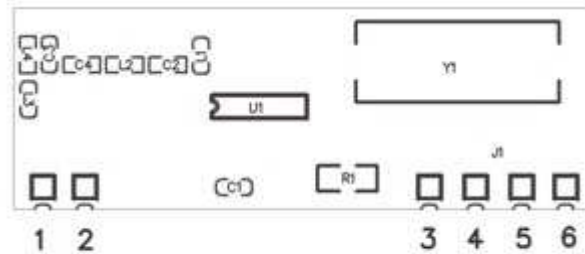

1. ANT    2. GND    3. SDN    4. VCC    5. DATA    6. GND

Pin	Name	Function
1	ANT	Antenna Input
2	GND	Ground
3	SDN	Shutdown Logic Control Input
4	VCC	Positive power
5	DATA	Data Output
6	GND	Ground

## 5. Electrical Characteristics


### RFM210LCF-S1

Testing Conditions: DC 3.3V / 25°C

Parameter	Label	Status	MIN.	Typical Value	MAX.	Unit
Frequency Range	Fc	Model: RFM210LCF-315D		315		MHz
		Model: RFM210LCF-433D		433.92		MHz
Modulation			ASK/OOK			
Sensibility		1 Kbps		-114		dBm
Data Rate	DR		1	3.3	5	Kbps
Receiver Bandwidth				330		KHz
Supply Voltage			1.8	3.3	3.6	V
Working Current		433.92MHZ		3.8	4.2	mA
Sleeping Current					1	uA
Image Rejection	IMR			30		dB
Working Temperature			-40		+85	°C

## 6. Dimensions Diagram

### RFM210LCF-S1

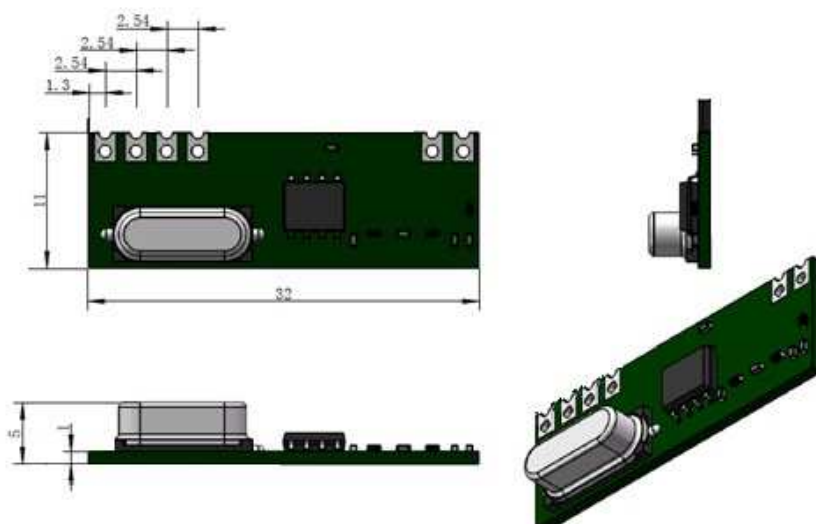

Unit: mm

## 7. Ordering information

Module P/N	Frequency	Voltage	Sleeping
RFM210LCF-315S1	315MHz	1.8-3.6V	Y
RFM210LCF-433S1	433MHz	1.8-3.6V	Y

### HOPE MICROELECTRONICS CO.,LTD

Add:2/F,Building3,pingshan Private Enterprise science and Technology Park,xili Town,Nanshan District,

Tel: 86-755-82973805

Fax: 86-755-82973550

Email: [sales@hoperf.com](mailto:sales@hoperf.com)

Website: <http://www.hoperf.com>

This document may contain preliminary information and is subject to change by Hope Microelectronics without notice. Hope Microelectronics assumes no responsibility or liability for any use of the information contained herein. Nothing in this document shall operate as an express or implied license or indemnity under the intellectual property rights of Hope Microelectronics or third parties.

The products described in this document are not intended for use in implantation or other direct life support applications where malfunction may result in the direct physical harm or injury to persons. NO WARRANTIES OF ANY KIND, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MECHANICALITY OR FITNESS FOR A PARTICULAR PURPOSE, ARE OFFERED IN THIS DOCUMENT.

©2006, HOPE MICROELECTRONICS CO.,LTD. All rights reserved.