



HESTORE.HU

elektronikai alkatrész áruház

EN: This Datasheet is presented by the manufacturer.

Please visit our website for pricing and availability at www.hestore.hu.

Ninigi

D A T A S H E E T


ZL303-2X SERIES 2.00 MM (0.079") PIN HEADER DUAL ROW




Specification:

- 1) To +105° Current Rate: 3 A
- 2) Dielectric Withstanding Voltage: 500 VAC
- 3) Insulation Resistance: 5000 M
- 4) Temperature: -55°C ~ 105°C
- 5) Insulator: Thermoplastic (UL94V-0)
- 6) Contact: Copper Alloy

Series No.	No. of Contact (N)	Contact Plating
ZL303-2X20P-T	2 x 20	Tin
ZL303-2X20P	2 x 20	Gold
ZL303-2X40P-T	2 x 40	Tin
ZL303-2X40P	2 x 40	Gold

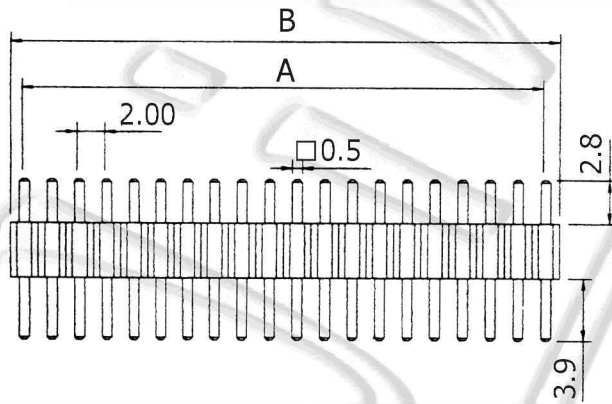

Pitch: 2.00 mm



$$A = 2.00 * (N-1)$$
$$B = 2.00 * N$$

All dimensions in mm.