




**HESTORE.HU**  
elektronikai alkatrész áruház

**EN:** This Datasheet is presented by the manufacturer.

Please visit our website for pricing and availability at [www.hestore.hu](http://www.hestore.hu).

# ARTESYN LPS60 SERIES

60 W

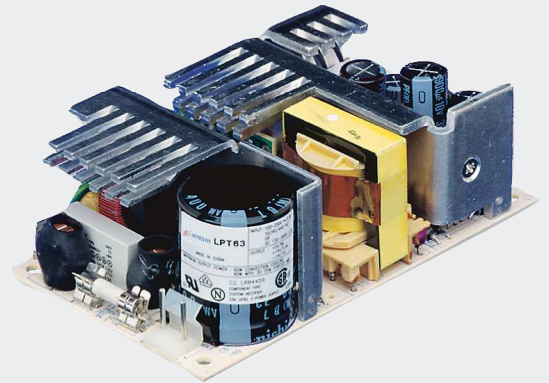

Advanced Energy's Artesyn LPS60 series of open-frame AC-DC power supplies comprises six single output models, offering voltages of 3.3 V, 5 V, 12 V, 15 V, 24 V or 48 V. Each model accepts a universal input of 85 to 264 VAC or 120 to 300 VDC. These compact switch-mode power supplies feature output overvoltage and short-circuit protection, as well as remote sense. LPS60 series power supplies provide 60 watts of output power with free air convection cooling and 80 W with 30 CFM of forced air. They are suitable for a wide variety of applications, including test and measurement, single-board computers, telecommunications and networking.

## SPECIAL FEATURES

- Universal input
- 3" x 5" footprint
- Remote sense
- Built in EMI filter
- Low output ripple
- Adjustable output voltage
- Overload protection
- 110 KHz switching frequency
- RoHS compliant
- LPX60 enclosure kit available

## SAFETY

- UL+CUL UL 62368-1
- NEMKO EN 62368-1
- CB IEC 62326-1
- CE Mark (LVD)
- UKCA Mark)

## AT A GLANCE

### Total Power:

60 to 80 W

### Input Voltage:

85 to 264 VAC  
127 to 300 VDC

### # of Outputs:

Single




**ELECTRICAL SPECIFICATIONS**

| Input                         |  |
|-------------------------------|--|
| Input range                   | 85 to 264 VAC<br>120 to 300 VDC  |
| Frequency                     | 47 to 440 Hz   |
| Inrush current                | <18 A peak @ 115 VAC, < 36 A peak @230 VAC, cold start @ 25 °C   |
| Input current                 | 1.5 A max. (RMS) @ 115 VAC   |
| Efficiency                    | 70% typical at full load   |
| EMI filter                    | FCC Class B conducted, CISPR 22 Class B conducted, EN55022 Class B conducted<br>VDE0878PT3 Class B conducted   |
| Safety ground leakage current | <0.5 mA @ 50/60 Hz, 264 VAC input  |
| Output                        |  |
| Maximum power                 | 60 W for convection, 80 W with 30 CFM forced air   |
| Adjustment range              | -5, +10% min.  |
| Hold-up time                  | 20 ms @ 60 W load, 115 VAC nominal line  |
| Overload protection           | Short circuit protection on all outputs<br>Case overload protected @ 110 to 145% of peak rating                |
| Overvoltage protection        | 5 V output; 5.7 to 6.7 VDC<br>Other outputs 110% to 125% of nominal output                                     |
| Remote sense                  | Compensates for 0.5 V lead drop min. Will operate without remote sense connected. Reverse connection protected |


**ENVIRONMENTAL SPECIFICATIONS**

|                                |   |
|--------------------------------|---|
| Operating temperature          | 0 °C to 50 °C ambient derate each output as 2.5% per degree from 50 °C to 70 °C, -20 °C startup                             |
| Storage temperature            | -40 °C to +85 °C  |
| Electromagnetic susceptibility | Designed to meet IEC61000-4-2, -4-3, -4-4, -4-5, -4-6, Level 3  |
| Humidity                       | Operating; non-condensing 5% to 95% RH  |
| Vibration                      | Three orthogonal axes, sweep at 1 cot/min.<br>5 min. dwell at four major resonances 0.75 G peak 5 Hz to 500 Hz, operational |
| Temperature coefficient        | ±0.04% per °C   |
| MTBF demonstrated              | >550,000 hours at full load and 25 °C ambient conditions  |

**Power Derating Curve**

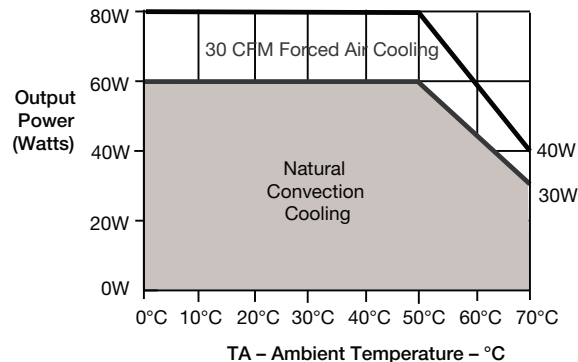

MECHANICAL DRAWINGS

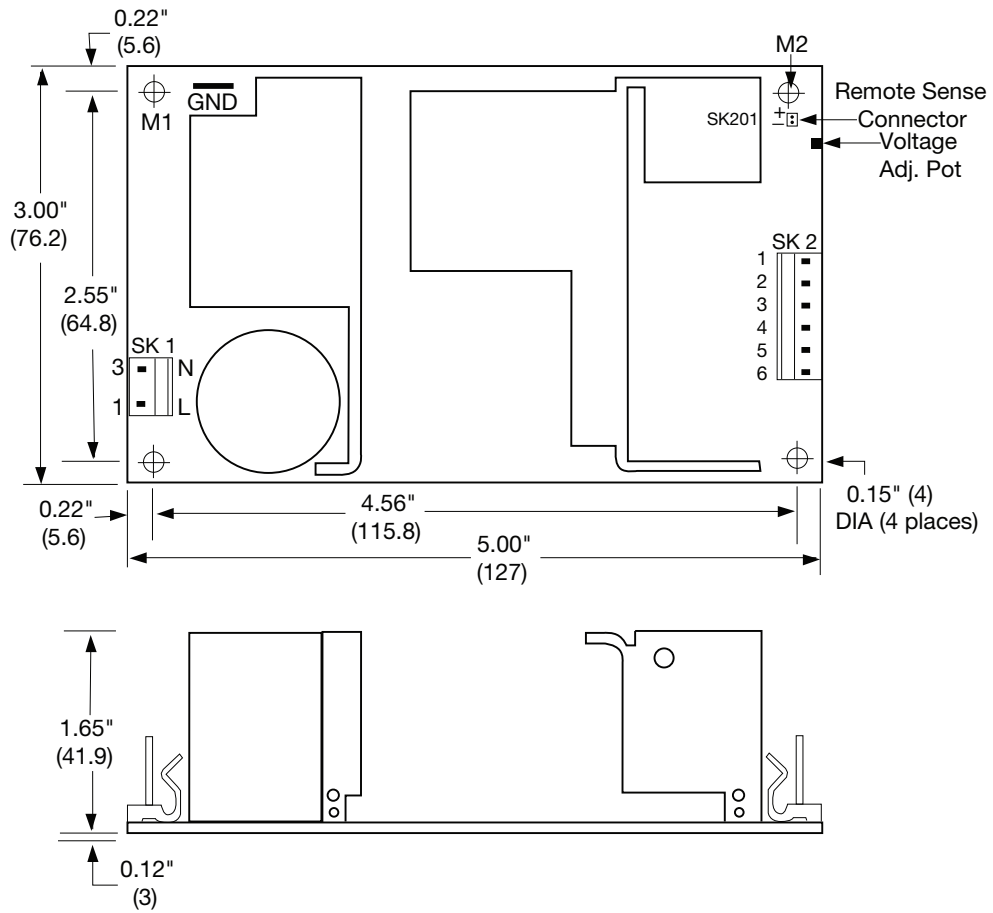

## ORDERING INFORMATION

| Model Number | Output Voltage | Minimum Load | Maximum Load with Convection Cooling | Maximum Load with 30CFM Forced Air | Peak Load <sup>1</sup> | Regulation <sup>2</sup> | Ripple P/P (PARD) <sup>3</sup> |
|--------------|----------------|--------------|--------------------------------------|------------------------------------|------------------------|-------------------------|--------------------------------|
| LPS61        | 3.3 V          | 2 A          | 12 A                                 | 16 A                               | 18 A                   | ±2%                     | 33 mV                          |
| LPS62        | 5 V            | 0 A          | 12 A                                 | 16 A                               | 18 A                   | ±2%                     | 50 mV                          |
| LPS63        | 12 V           | 0 A          | 5 A                                  | 6.7 A                              | 7.5 A                  | ±2%                     | 120 mV                         |
| LPS64        | 15 V           | 0 A          | 4 A                                  | 5.3 A                              | 6 A                    | ±2%                     | 150 mV                         |
| LPS65        | 24 V           | 0 A          | 2.5 A                                | 3.3 A                              | 3.8 A                  | ±2%                     | 240 mV                         |
| LPS68        | 48 V           | 0 A          | 1.3 A                                | 1.7 A                              | 1.9 A                  | ±2%                     | 480 mV                         |

<sup>1</sup> Peak current lasting < 30 seconds with a maximum 10% duty cycle.

<sup>2</sup> At 25 °C including initial tolerance, line voltage, load currents and output voltages adjusted to factory settings.

<sup>3</sup> Peak-to-peak with 20 MHz bandwidth and 10 µF (tantalum capacitor) in parallel with a 0.1 µF capacitor at rated line voltage and load ranges.

<sup>4</sup> This product is a Component Power Supply and is only for inclusion by professional installers within other equipment and must not be operated as a standalone product. EMC compliance to appropriate standards must be verified at the system level. This product is for sale to OEMs and System Integrators, including through Distribution Channels. It is not intended for sale to End Users.

## PIN ASSIGNMENTS

| Connector | LPS61   | LPS62   | LPS63   | LPS64   | LPS65   | LPS68   |
|-----------|---------|---------|---------|---------|---------|---------|
| SK1-1     | Line    | Line    | Line    | Line    | Line    | Line    |
| SK1-3     | Neutral | Neutral | Neutral | Neutral | Neutral | Neutral |
| SK2-1     | 3.3 V   | 5 V     | +12 V   | +15 V   | +24 V   | 48 V    |
| SK2-2     | 3.3 V   | 5 V     | +12 V   | +15 V   | +24 V   | 48 V    |
| SK2-3     | 3.3 V   | 5 V     | +12 V   | +15 V   | +24 V   | 48 V    |
| SK2-4     | Common  | Common  | Common  | Common  | Common  | Common  |
| SK2-5     | Common  | Common  | Common  | Common  | Common  | Common  |
| SK2-6     | Common  | Common  | Common  | Common  | Common  | Common  |
| SK201-1   | +Sense  | +Sense  | +Sense  | +Sense  | +Sense  | +Sense  |
| SK201-2   | -Sense  | -Sense  | -Sense  | -Sense  | -Sense  | -Sense  |

## MATING CONNECTORS

|  |  |
|--|--|
| AC Input   | Molex 09-50-8031 (USA) Not required for (-T) option<br>09-91-0300 (UK)<br>PINS: 08-58-0111 |
| DC Outputs   | Molex 09-50-8061 (USA) Not required for (-T) option<br>09-93-0600 (UK)<br>PINS: 08-52-0113 |
| Remote Sense   | Molex 22-01-2025<br>PINS: 08-52-0113   |
| Astec Connector Kit #70-841-006, includes all of the above |  |

<sup>1</sup> Specifications subject to change without notice.

<sup>2</sup> All dimensions in inches (mm), tolerance is ±0.02" (± 0.5mm).

<sup>3</sup> Mounting holes M1 and M2 should be grounded for EMI purposes.

<sup>4</sup> Mounting hole M1 is safety ground connection.

<sup>5</sup> Specifications are for convection rating at factory settings at 115 VAC input, 25 °C unless otherwise stated.

<sup>6</sup> Warranty: 2 years.

<sup>7</sup> Weight: 0.75 lbs/0.34 kg.



For international contact information,  
visit [advancedenergy.com](http://advancedenergy.com).

[powersales@aei.com](mailto:powersales@aei.com) (Sales Support)  
[productsupport.ep@aei.com](mailto:productsupport.ep@aei.com) (Technical Support)  
+1 888 412 7832

## ABOUT ADVANCED ENERGY

Advanced Energy (AE) has devoted more than three decades to perfecting power for its global customers. AE designs and manufactures highly engineered, precision power conversion, measurement and control solutions for mission-critical applications and processes.

Our products enable customer innovation in complex applications for a wide range of industries including semiconductor equipment, industrial, manufacturing, telecommunications, data center computing, and medical. With deep applications know-how and responsive service and support across the globe, we build collaborative partnerships to meet rapid technological developments, propel growth for our customers, and innovate the future of power.

PRECISION | POWER | PERFORMANCE

---

Specifications are subject to change without notice. Not responsible for errors or omissions. ©2022 Advanced Energy Industries, Inc. All rights reserved. Advanced Energy®, AE® and Artesyn™ are U.S. trademarks of Advanced Energy Industries, Inc.