



HESTORE.HU



elektronikai alkatrész áruház

EN: This Datasheet is presented by the manufacturer.

Please visit our website for pricing and availability at www.hestore.hu.

SPECIFICATION MODEL: "SL19" SERIES

6A 120VAC, 3A 250VAC (UL)
 6A 28VAC (UL)
 INITIAL CONTACT RESISTANCE : 10mΩ (max)
 INSULATION RESISTANCE: 500VDC 100MΩ (min)
 DIELECTRIC STRENGTH: 1,000VAC FOR 1 MINUTE
 LIFE CYCLE : 30,000 CYCLES
 TEMPERATURE RANGE: -20°C TO 85°C
 CASE: DIALYL PHTHALATE (DAP)
 HOUSING: STAINLESS STEEL
 SLIDE HANDLE: NYLON66
 CONTACT: COIN SILVER, SILVER PLATED
 CENTER CONTACT & TERMINALS : BRASS SILVER PLATED

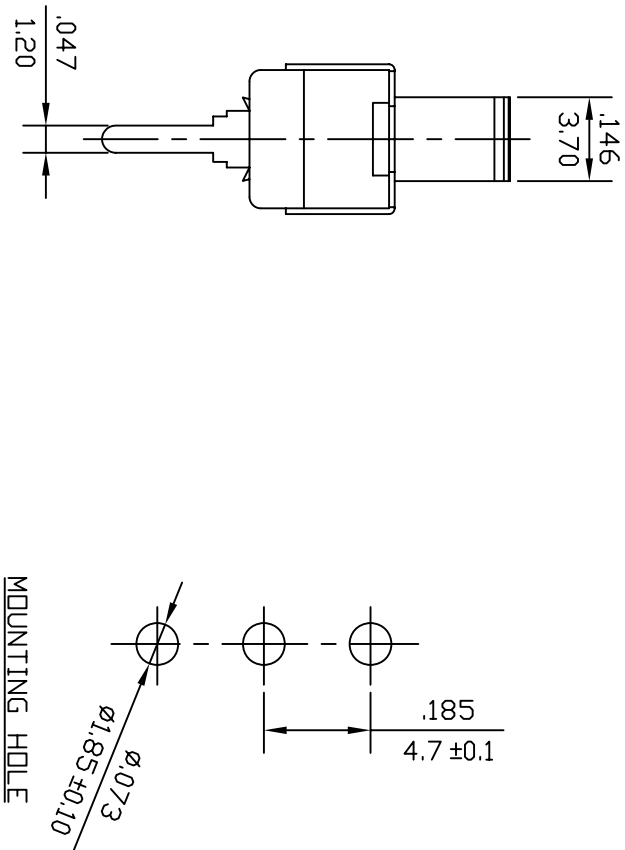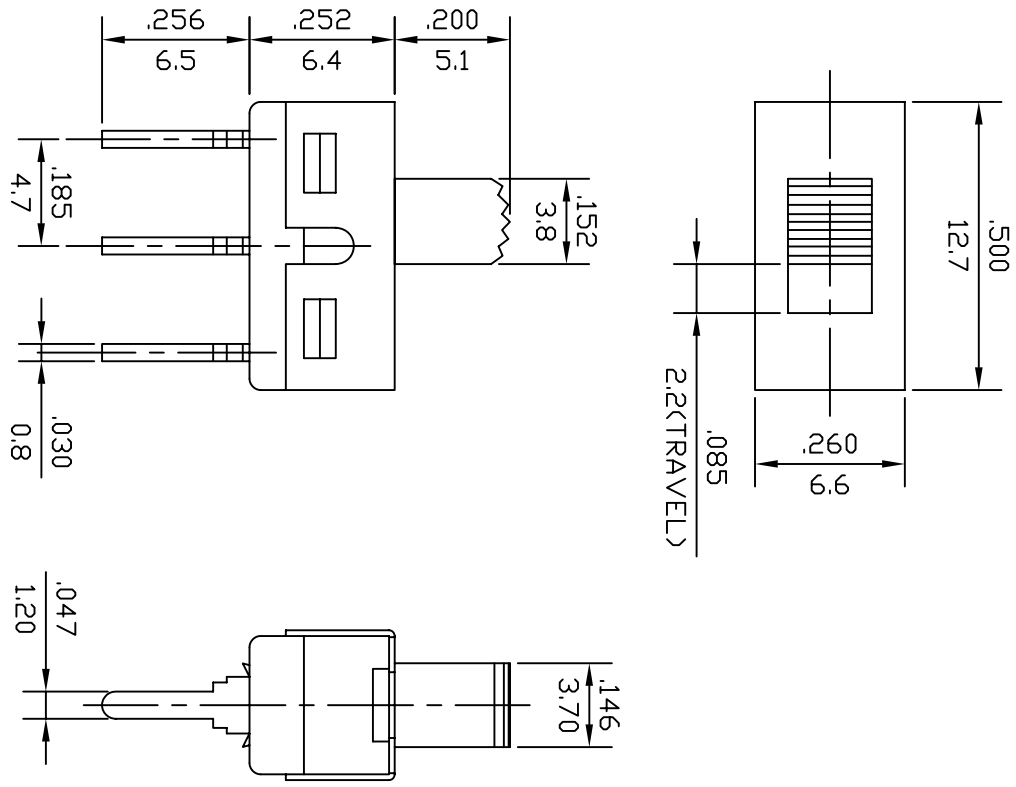

REVISION	DESCRIPTION	REVISED BY	TOLERANCES .X±0.3	ANGLE $\frac{1}{2}^\circ$	UNIT	PART NAME	SL19 SPEC DRAWING	DWG NO
△			DRAWN BY 吳美玉	DESIGNED BY 吳美玉	mm			WS0205A
△			CHECKED BY 吳美玉	APPROVED BY 吳美玉	3/1			
△	2005.12.14 換新圖框 重新出圖				2003.12.24	PART NO	SL19-121	