



HESTORE.HU

elektronikai alkatrész áruház

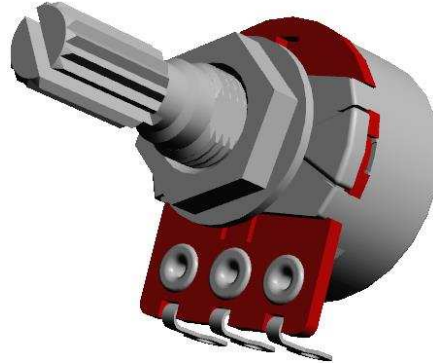
EN: This Datasheet is presented by the manufacturer.

Please visit our website for pricing and availability at www.hestore.hu.

PR-18 series







Characteristic

PR-18 single turn potentiometers are enclosed in a metal housing, with carbon resistive element. Potentiometers have a linear characteristic of regulation, and are made in one of three versions, which differ in the type of terminals, for PCB and wire soldering. PR-18 series potentiometers may be equipped in a single-pole switch. Potentiometers with 5% and 10% resistance tolerance are available on request.



<u>Parameter</u>		<u>Value</u>
Nominal resistance		E3 series
Range of available resistances		120 Ω ... 4,7 MΩ
Resistance tolerance	R ≤ 220 kΩ	±20%
	R > 220 kΩ	±30%
Max. dissipation power P _n (T = 40°C)		0,2 W
Max. load at category temperature		25% P _n
Max. operating voltage		200 V
Breakdown voltage		280 V
Mechanical rotation angle		300° ±5°
Switch parameters	AC	120 V / 1 A
	DC	16 V / 1 A
Climatic category		25/070/10

Shaft types

Type	Length L [mm]		
P1	16; 20; 25; 32		
P5	16; 20; 25; 32		
P6	16; 20; 25; 32		

TELPOD S.A.

str. Pilsudskiego 63A
32-050 Skawina
www.telpod.pl

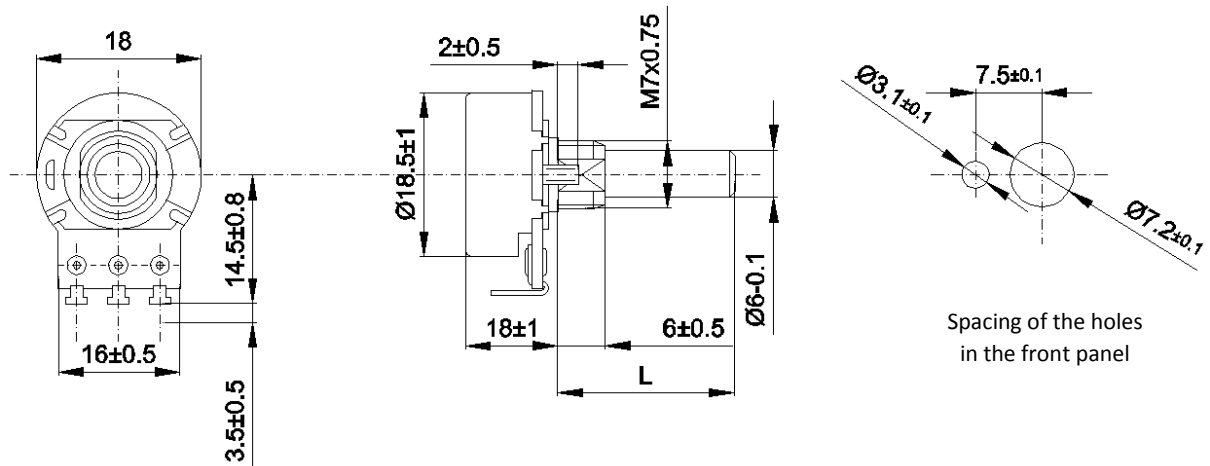
Technical division: +48 (0)12 257 10 12
Sales division: +48 (0)12 257 10 35
fax: +48 (0)12 257 10 13
e-mail: potentiometer@telpod.pl

date: 04 / 2015
Copyright 2015 by Telpod

PR-18 series


Dimensions

PR ... // version with ring terminals for wire soldering



PRPC ... // version with terminals for PCB bent toward the shaft

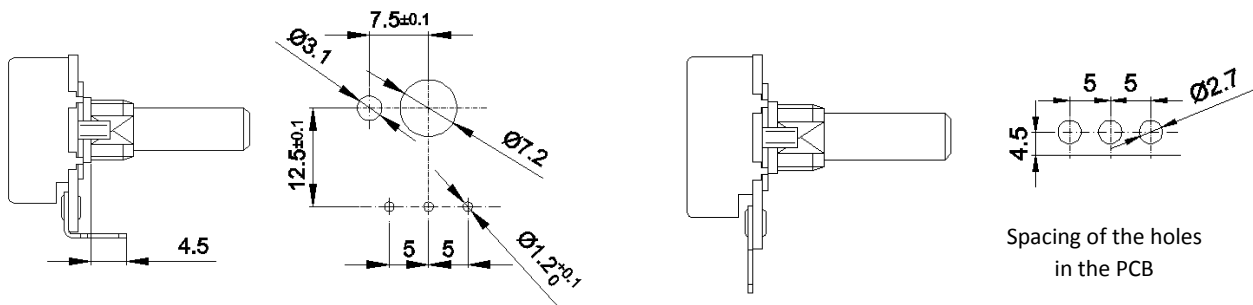PRP... // version with straight terminals for PCB



PR ... s56 // potentiometer with a single-pole switch

