




**HESTORE.HU**

elektronikai alkatrész áruház

**EN:** This Datasheet is presented by the manufacturer.

Please visit our website for pricing and availability at [www.hestore.hu](http://www.hestore.hu).

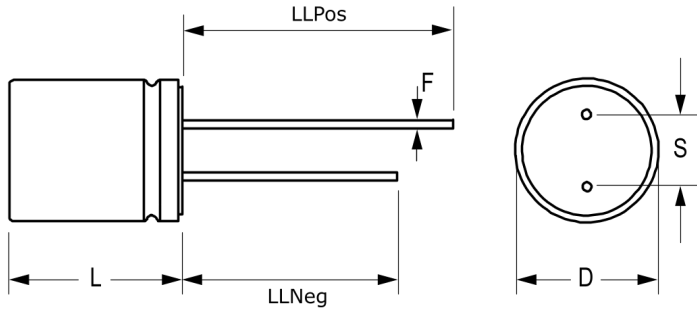

Click [here](#) for the 3D model.

### Dimensions

|             |                 |
|-------------|-----------------|
| D           | 8mm +/-0.5mm    |
| L           | 12mm +/-1mm     |
| S           | 3.5mm +/-0.5mm  |
| LL Negative | 15mm MIN        |
| LL Positive | 19mm MIN        |
| F           | 0.6mm +/-0.05mm |

### Packaging Specifications

|                    |           |
|--------------------|-----------|
| Packaging          | Bulk, Bag |
| Packaging Quantity | 500       |

### General Information

|              |                                |
|--------------|--------------------------------|
| Series       | A755                           |
| Dielectric   | Polymer Aluminum               |
| Description  | Single Ended, Polymer Aluminum |
| RoHS         | Yes                            |
| Lead         | Wire Leads                     |
| AEC-Q200     | No                             |
| Halogen Free | Yes                            |

### Specifications

|                       |  |
|-----------------------|--|
| Capacitance           | 1,200 uF   |
| Capacitance Tolerance | 20%  |
| Voltage DC            | 4 VDC, 4.6 VDC (Surge)   |
| Temperature Range     | -55/+105°C   |
| Rated Temperature     | 105°C  |
| Life                  | 5000 Hrs (+/-20% Initial Capacitance, 1.5x DF MAX, Leakage Within Limit) |
| Dissipation Factor    | 10% 120Hz 20C  |
| Resistance            | 14 mOhms (100kHz 20C)  |
| Ripple Current        | 4900 mAmps (100kHz 105C)   |
| Leakage Current       | 720 uA (2min 20°C)   |