




HESTORE.HU

elektronikai alkatrész áruház

EN: This Datasheet is presented by the manufacturer.

Please visit our website for pricing and availability at www.hestore.hu.

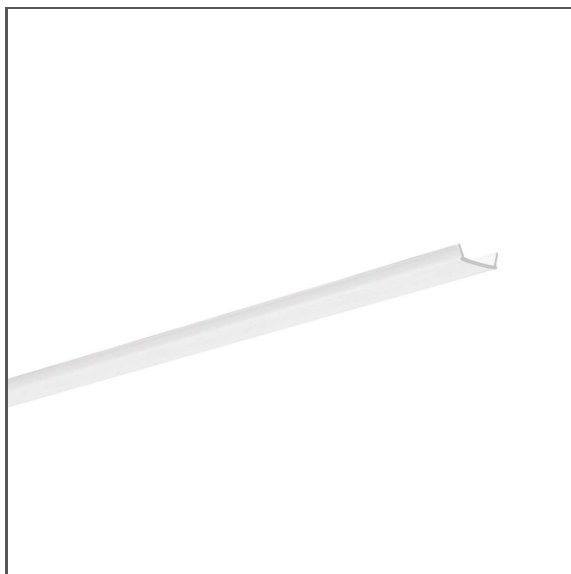

APPLICATION

- LED protection and light diffusion in lighting fixtures

MOUNTING

- Snapped in a dedicated profile

ADDITIONAL INFORMATION

- The maximum LED power 7 W/m
- standard lengths of KLUŚ profiles and covers: 1000 mm (tolerance ± 1.5 mm) and 2005 mm / 3010 mm (tolerance + 5 mm); for selected covers: 6050 mm, 10050 mm (tolerance + 5 mm)
- when choosing a different length of profiles / covers than available in the standard, you should additionally choose the cutting service at KLUŚ

TECHNICAL DRAWING



TECHNICAL SPECIFICATIONS

Material	PVC
Shape	flat
Maximum length on request	6000 mm
Width	12.4 mm
Height	4 mm

Finish	Light transmission	Length	Ref
frosted	54 %	1000 mm	B17179F_1
		2005 mm	B17179F_2
		3010 mm	B17179F_3
clear	86 %	1000 mm	B17179C_1
		2005 mm	B17179C_2
		3010 mm	B17179C_3

RELATED PROFILES > ARCHITECTURAL



KOZMA
A18040



OPK-4
A00370



PDS-T
A02057



PDS-UST
A02725



POK-US
A01234

Cover KA-T-11

Ref. B17179F, B17179C



POKET
A01179


RELATED PROFILES > FOR MAIN LIGHTING



DES
A18030



MOD-50
A18047



MOD-100
A18049

RELATED PROFILES > FOR SCONCES AND WALL LIGHTING



OBIT
A04826



LIT-L
A18033



PLAKIN-DUO
A04106A

RELATED PROFILES > ILLUMINATION OF COVES AND ARCHITECTURAL NICHES



POLI
A07176



NISA-KON
A18027



NISA-NI
A18029



NISA-KRA
A18026

RELATED PROFILES > STAIRS ILLUMINATION



POR
A06144



STEP
A18042

RELATED PROFILES > UNIVERSAL



45-16
A08504



45-ALU
A04023



MICRO-NK
A01587



MICRO-HG
A01419



KUBIK-45
A07697



OLEK
A08505



MICRO-H
A00599



PDS-H
A09204



PDS-NK
A01588



PDS-4-PLUS
A01263



PDS-ZMG
A01418



PDS-ZM-PLUS
A02056



MICRO-PLUS
A02966

NEW