




HESTORE.HU

elektronikai alkatrész áruház

EN: This Datasheet is presented by the manufacturer.

Please visit our website for pricing and availability at www.hestore.hu.

| SYM | DESCRIPTION | APPROVED | DATE |
|-----|-------------|----------|------|
| 1 | | | |
| 2 | | | |
| 3 | | | |
| 4 | | | |

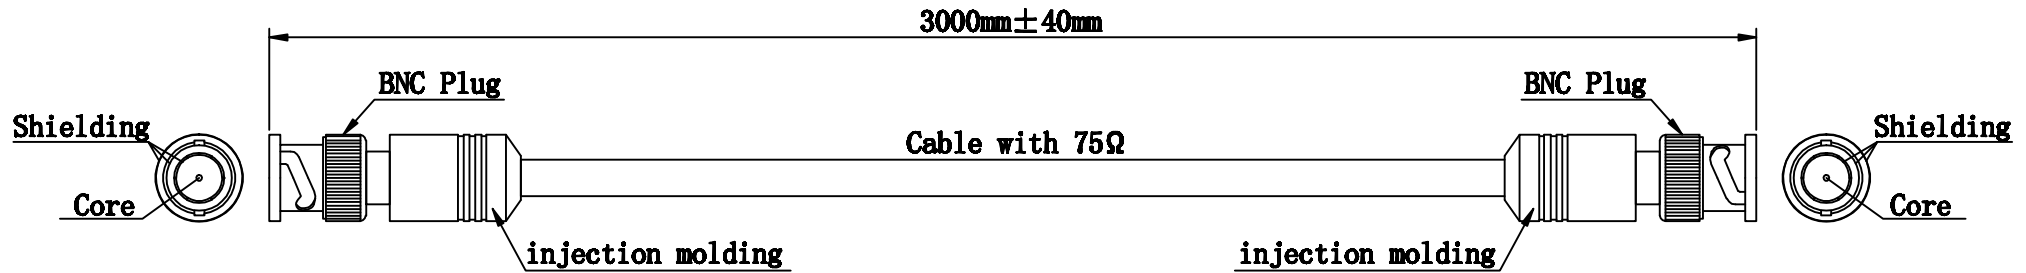

BNC video connector cable (RG59), double shielded

Connectors: 2x BNC male
 Contacts: nickel-plated (gold-plated pins)
 Conductor area: 0.324 mm²
 AWG: 22
 Composition of conductor: 1 x 0.643 mm
 Conductor material: CCS
 Insulation material: PE
 Jacket material: PVC
 Conductor resistance: 300 ± 10 Ω/km
 Shielding: 30 % coverage
 Capacitance: 58 ± 5 pF/m
 Cable OD: 6.0 ± 0.2 mm
 Weight: 41 ± 2 g/m

| SYM | Name | Description | Remarks | Tolerance (mm) | | | |
|-----|------|-------------|---------|-------------------------|-------------|-----------------|-------------------|
| | | | | Wire harness also L(mm) | Trunk | Protection tube | Positioning space |
| 13 | | | | | | | |
| 12 | | | | | | | |
| 11 | | | | L ≤ 200 | +20 -10 | | ±5 |
| 10 | | | | 200 < L ≤ 500 | +25 -10 | | ±5 |
| 9 | | | | 500 < L ≤ 1000 | +40 -20 | | ±10 |
| 8 | | | | 1000 < L ≤ 2000 | +60 -30 | | ±20 |
| 7 | | | | 2000 < L ≤ 3000 | +80 -50 | | ±30 |
| 6 | | | | 3000 < L ≤ 5000 | +100 -70 | | ±30 |
| 5 | | | | L > 5000 | +150 -80 | | ±40 |
| 4 | | | | | | | |
| 3 | | | | | | | |
| 2 | | | | | | | |
| 1 | | | | | | | |

| | | | |
|----------|--------------|--------------|-------------------|
| APPROVED | Shen Juan | | |
| CHECKED | Li Jie | | |
| DRAWN | Zhang Yining | Customer : | Date : 2023-10-19 |
| UNIT | mm | DRAWING NO. | BNC-075-3.0 |
| REV | 1 | CUSTOMER NO. | |
| | | SIZE: | A4 |
| | | PAGE: | 1/1 |

