




HESTORE.HU

elektronikai alkatrész áruház

EN: This Datasheet is presented by the manufacturer.

Please visit our website for pricing and availability at www.hestore.hu.

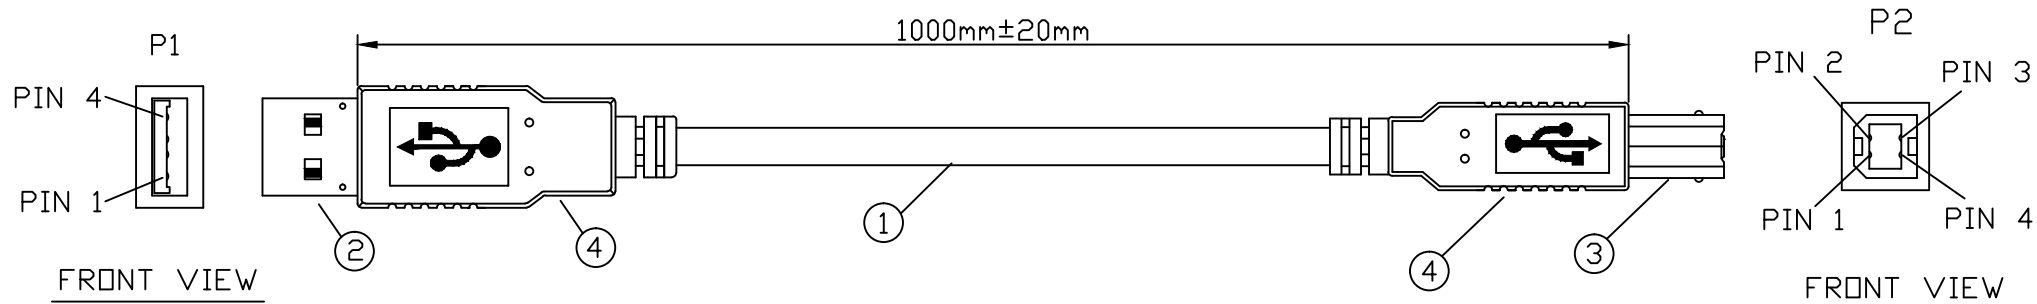

- 1.CABLE:UL2725,28AWG(7/0.12mm)×1PAIRS
+24AWG(7/0.2mm)×2C,TIN COPPER
INSULATOR:P.P FOR 28AWG&PVC 24AWG
SHIELD:AL-FOIL+DRAIN WIRE+BRAID
JACKET:PVC,COLOR:GREY,Ø.D:4.8mm±0.2mm
- 2.CONNECTOR:1 PCS USB A SOLDER TYPE MALE
COLOR:WHITE COLOR
SHELL:NICKEL PLATED
- 3.CONNECTOR:1 PCS USB B SOLDER TYPE MALE
COLOR:WHITE COLOR
SHELL:NICKEL PLATED
- 4.HOOD:MOULDED GREY COLOR
- 5.Fulfill ROHS Guideline
- 6.ELECTRONIC TEST:100% OPEN SHORT+MISS WIRE TEST

WIRE LIST

P1		P2	
USB A MALE	WIRE COLOR	USB B MALE	AWG
1	RED	1	24AWG
2	WHITE	2	1 PAIRS (28AWG)
3	GREEN	3	
4	BLACK	4	24AWG
SHELL	DRAIN	SHELL	

PART NO	CAB-USBAB-1.0	SHEET NO	1	THIRD ANGLE PROJECTION
TITLE:USB A MALE TO USB B MALE L:1.0M,UL2725 CABLE,GREY COLOR				
SCALE		N.T.S	DRAWN BY & DATE	
SIZE		A4	CHECKED BY & DATE	
UNIT				APPROVED BY & DATE
<input checked="" type="checkbox"/> mm <input type="checkbox"/> INCH				
DWN NO	D-CAB-USBAB-1.0			

