



**HESTORE.HU**

elektronikai alkatrész áruház

**EN:** This Datasheet is presented by the manufacturer.

Please visit our website for pricing and availability at [www.hestore.hu](http://www.hestore.hu).

1 2 3 4 5 6 7 8

A

A

B

B

C

C

D

D

E

E

F

F

G

G

H

H




### SPECIFICATIONS

#### Electrical

Current Rating: 2A AC, DC  
 Voltage Rating: 100V AC/ max.  
 Operating Temp.: -25°C ~ +85°C  
 Insulation Resistance: 1000MΩ/ min.  
 Dielectric Withstanding Voltage: 800V AC/ min.  
 Contact Resistance: 20mΩ/ max.

#### Material

Material: Nylon 66, UL94V-0

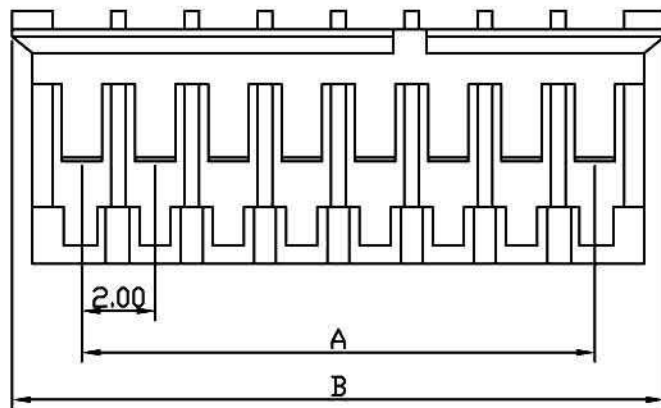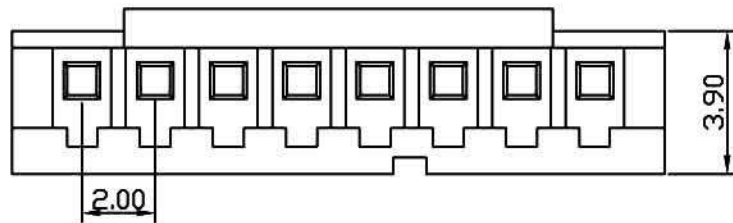

Poles	Dimension mm (in.)	
	A	B
2	2.0(0.079)	5.8(0.228)
3	4.0(0.157)	7.8(0.307)
4	6.0(0.236)	9.8(0.386)
5	8.0(0.315)	11.8(0.465)
6	10.0(0.394)	13.8(0.543)
7	12.0(0.472)	15.8(0.622)
8	14.0(0.551)	17.8(0.701)
9	16.0(0.630)	19.8(0.780)
10	18.0(0.709)	21.8(0.858)
11	20.0(0.787)	23.8(0.937)
12	22.0(0.886)	25.8(1.016)
13	24.0(0.945)	27.8(1.094)
14	26.0(1.024)	29.8(1.173)
15	28.0(1.102)	31.8(1.252)
16	30.0(1.181)	33.8(1.331)

RoHS Compliant

Gold Star Connectors Co., Ltd.

UNIT

SCALE

PART NAME

MM

HOUSING 2mm (CRIMP)

APPD.

CKD.

TOLERANCE

PART NO.

REV.

制表日: 2006/01/19

DRAWING.

APPROVED

Jolin

NCH200S-xx

A

1 2 3 4 5 6 7 8