




**HESTORE.HU**

elektronikai alkatrész áruház

**EN:** This Datasheet is presented by the manufacturer.

Please visit our website for pricing and availability at [www.hestore.hu](http://www.hestore.hu).

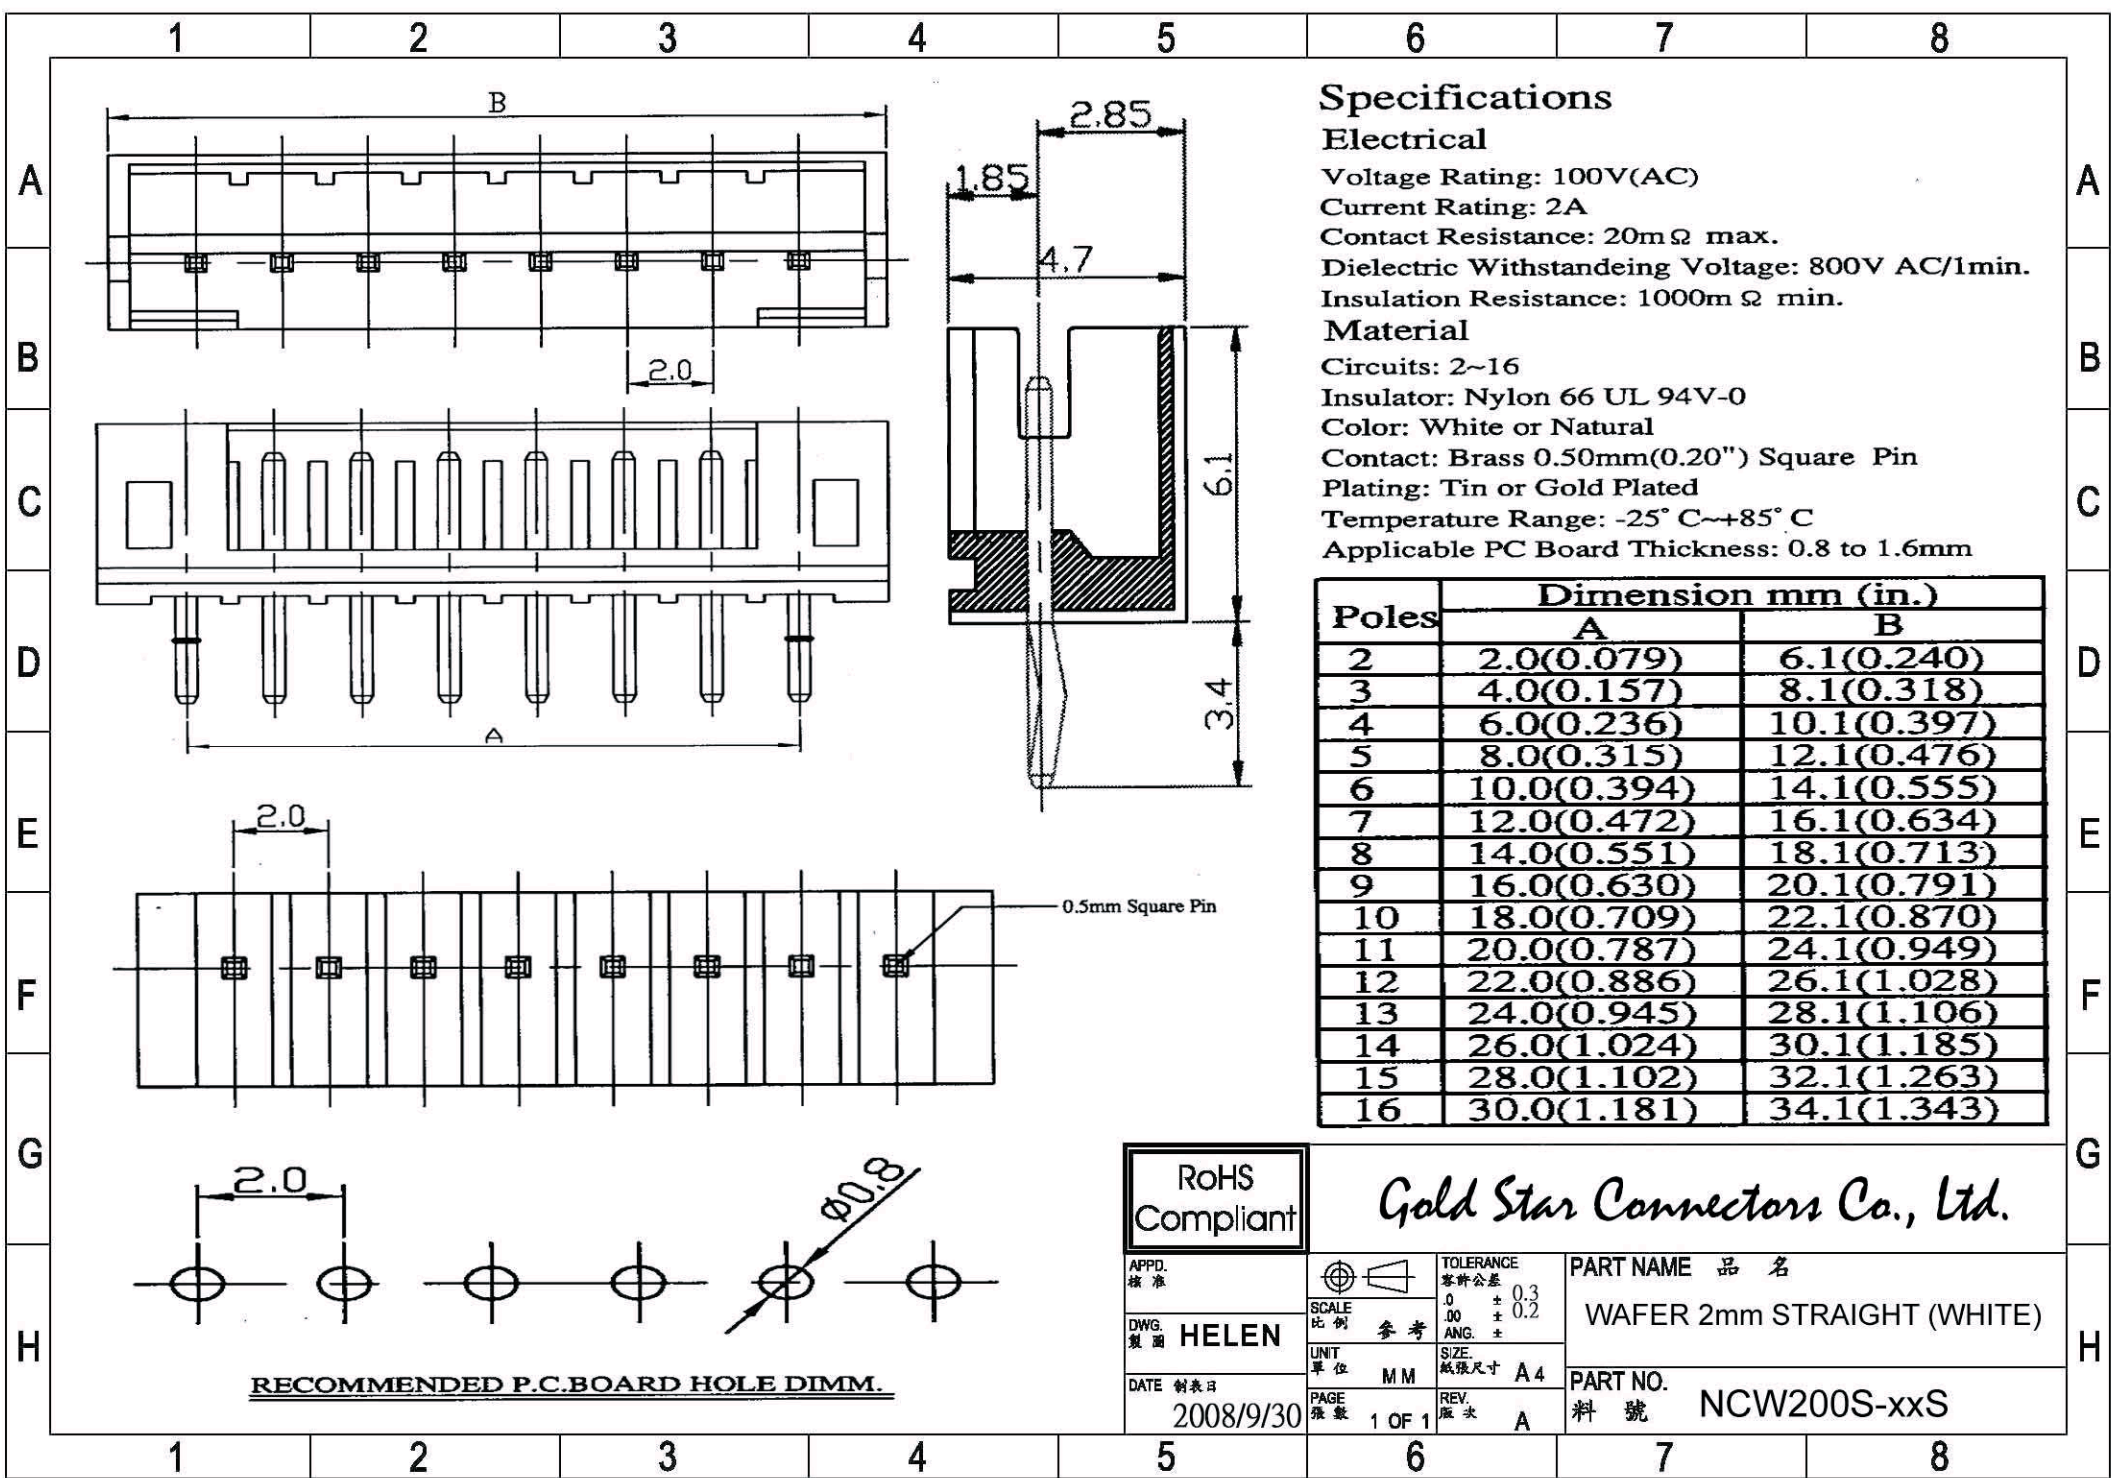

### Specifications

**Electrical**  
 Voltage Rating: 100V(AC)  
 Current Rating: 2A  
 Contact Resistance: 20mΩ max.  
 Dielectric Withstandeing Voltage: 800V AC/1min.  
 Insulation Resistance: 1000mΩ min.

**Material**  
 Circuits: 2~16  
 Insulator: Nylon 66 UL 94V-0  
 Color: White or Natural  
 Contact: Brass 0.50mm(0.20") Square Pin  
 Plating: Tin or Gold Plated  
 Temperature Range: -25° C~+85° C  
 Applicable PC Board Thickness: 0.8 to 1.6mm

Poles	Dimension mm (in.)	
	A	B
2	2.0(0.079)	6.1(0.240)
3	4.0(0.157)	8.1(0.318)
4	6.0(0.236)	10.1(0.397)
5	8.0(0.315)	12.1(0.476)
6	10.0(0.394)	14.1(0.555)
7	12.0(0.472)	16.1(0.634)
8	14.0(0.551)	18.1(0.713)
9	16.0(0.630)	20.1(0.791)
10	18.0(0.709)	22.1(0.870)
11	20.0(0.787)	24.1(0.949)
12	22.0(0.886)	26.1(1.028)
13	24.0(0.945)	28.1(1.106)
14	26.0(1.024)	30.1(1.185)
15	28.0(1.102)	32.1(1.263)
16	30.0(1.181)	34.1(1.343)

**RoHS Compliant**

*Gold Star Connectors Co., Ltd.*

APPD. 核准  
 DWG. HELEN  
 DATE 制表日 2008/9/30

SCALE 比例 参考  
 UNIT 单位 MM  
 PAGE 张数 1 OF 1

TOLERANCE 容許公差  
 0 ± 0.3  
 .00 ± 0.2  
 ANG ±  
 SIZE 線規尺寸 A4  
 REV 版本 A

PART NAME 品名  
 WAFER 2mm STRAIGHT (WHITE)  
 PART NO.  
 料號 NCW200S-xxS

RECOMMENDED P.C. BOARD HOLE DIMM.