



**HESTORE.HU**

elektronikai alkatrész áruház

**EN:** This Datasheet is presented by the manufacturer.

Please visit our website for pricing and availability at [www.hestore.hu](http://www.hestore.hu).

#### TECHNICAL DATA

<b>BASIC DATA</b>		
Rated voltage	12	V
20hr capacity at end voltage 1,75V/cell at 25°C	7,2	Ah
Internal resistance (fully charged battery) at 25°C	22	mΩ
<b>DIMENSIONS</b>		
Length	151(±1)	mm
Width	65(±1)	mm
Height	94(±1)	mm
(Height with terminals)	99(±1)	mm
Weight	2,40	kg
<b>TERMINALS</b>		
Faston	T2	-
<b>OPERATION TEMPERATURE RANGE</b>		
Storage	-15°C to +40°C	
Charge	-15°C to +40°C	
Discharge	-15°C to +50°C	
<b>STORAGE</b>		
Selfdischarge after 3 months at 20°C	6	%
Selfdischarge after 6 months at 20°C	15	%
Selfdischarge after 12 months at 20°C	37	%
<b>CASE MATERIAL</b>		
Standard	ABS (UL.94:HB)	
Flame retardant	ABS (UL94:V0)	
<b>CHARGE VOLTAGE</b>		
Float charge at 25°C	13,65 V ± 0,18 V	
Cycle charge at 25°C	14,70 V ± 0,30 V	
<b>CHARGE CURRENT</b>		
Recommended	0,72	A
Maximum	2,16	A
<b>MAX. DISCHARGE CURRENT</b>		
5 sec.	108	A
<b>DESIGNED LIFE</b>		
BPower designed life at 25°C	up to 8	years
At 20°C according to Eurobat - General Purpose group	10 - 12	years
<b>CYCLE LIFE</b>		
At 100% D.O.D.	250	cycles
At 50% D.O.D.	600	cycles

#### PHOTO



#### APPLICATIONS

- Uninterruptible Power Supplies (UPS)
- Telecommunication PABX
- Cash registers and fiscal printers
- Emergency lighting systems
- Emergency and fire systems
- Measure and mobile equipment
- Lawn mowers and electric bikes
- Toys

#### SAFETY



#### DISCHARGE CHARACTERISTICS

##### • Constant current (Current [A], 25 [°C])


F.V. V/cell	Discharge time										
	5 min	10 min	15 min	30 min	1h	2h	3h	4h	5h	10h	20h
1,85	23,5	16,2	12,5	6,61	3,98	2,05	1,63	1,30	1,11	0,650	0,341
1,80	26,4	17,0	13,1	6,92	4,13	2,14	1,69	1,37	1,16	0,680	0,357
1,75	28,1	18,2	13,6	7,14	4,25	2,21	1,75	1,42	1,23	0,721	0,377
1,70	29,7	18,6	13,9	7,30	4,36	2,27	1,80	1,45	1,25	0,728	0,382
1,65	31,3	19,1	14,2	7,45	4,42	2,32	1,84	1,47	1,27	0,737	0,387
1,60	32,6	19,8	14,5	7,61	4,48	2,35	1,87	1,49	1,28	0,747	0,392

##### • Constant power (Power [W/cell], 25 [°C])


F.V. V/cell	Discharge time										
	5 min	10 min	15 min	30 min	1h	2h	3h	4h	5h	10h	20h
1,85	42,8	29,8	24,5	13,0	8,43	4,21	3,27	2,87	2,47	1,36	0,694
1,80	48,0	31,3	25,5	13,7	8,73	4,39	3,45	3,01	2,54	1,39	0,718
1,75	50,3	32,7	26,2	14,1	8,97	4,63	3,60	3,10	2,63	1,42	0,737
1,70	52,5	34,0	26,8	14,5	9,15	5,22	3,73	3,15	2,68	1,44	0,750
1,65	54,3	35,3	27,5	14,7	9,30	5,32	3,82	3,20	2,72	1,45	0,760
1,60	55,8	36,3	28,2	14,9	9,45	5,40	3,87	3,23	2,73	1,46	0,770

F.V. - Final Voltage


#### DIMENSIONS/TERMINALS

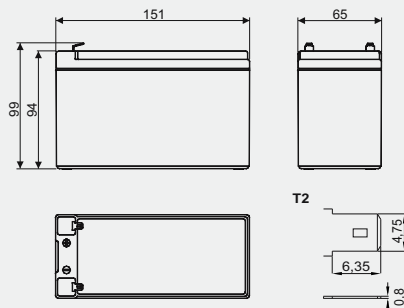


#### DISCHARGE CHARACTERISTICS

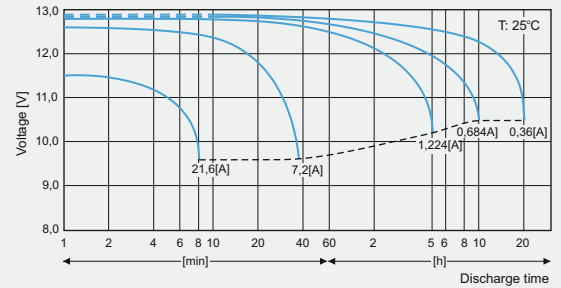


#### CHARGE CHARACTERISTICS

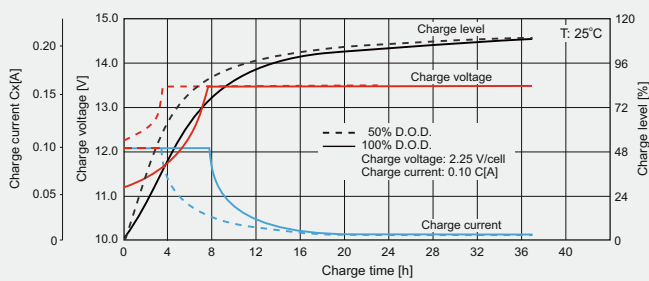


#### FLOAT LIFE

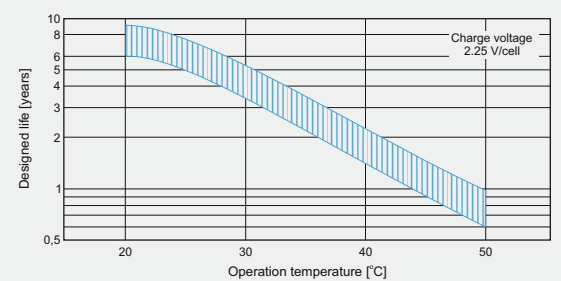


#### CYCLIC LIFE

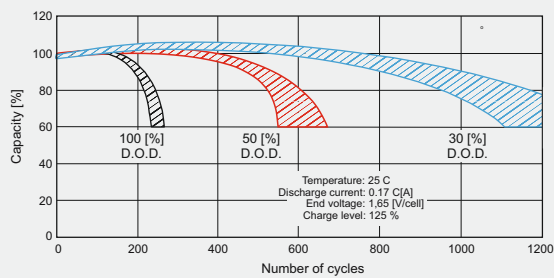

#### CAPACITY VS. TEMPERATURE

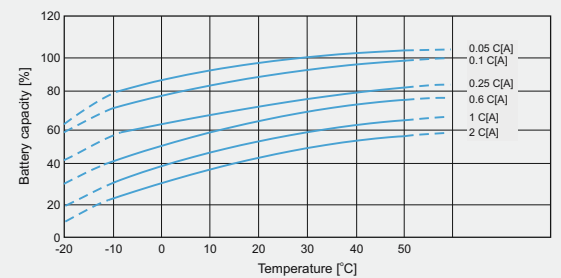

#### SELFDISCHARGE CHARACTERISTICS

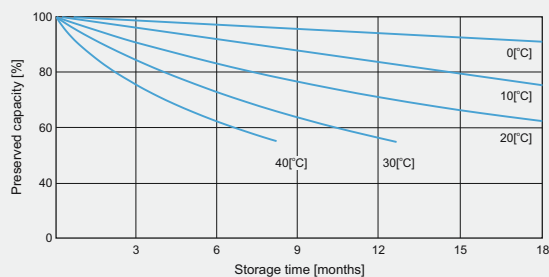

#### ENVIRONMENTAL INFORMATION

EXPLOITED BATTERIES ARE CONSIDERED AS HAZARDOUS WASTE. THESE WASTES DUE TO THEIR ORIGIN, CHEMICAL COMPOSITION (THEY CONTAINS HEAVY METALS LIKE LEAD AND OTHER TOXIC SUBSTATIONS) AND OTHER FEATURES MAY BE DANGEROUS FOR ENVIRONMENT AND HUMAN OR ANIMAL HEALTH AND LIFE.