




HESTORE.HU

elektronikai alkatrész áruház

EN: This Datasheet is presented by the manufacturer.

Please visit our website for pricing and availability at www.hestore.hu.

Stiftleisten, Raster 2.54, Doppelreihig
Pin Header, Pitch 2.54, Double Row

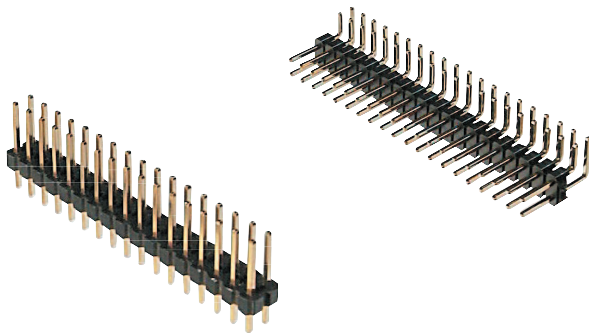

Isolierkörper
Polyester, UL94V-0

Insulator material
Polyester, UL94V-0

Nennstrom
3A

Current rating
3A

Kontakt material
Messing

Contact material
Brass

Insulationswiderstand
5000MΩ min.


Insulator resistance
5000MΩ min.

Durchschlagsspannung
500V AC


Dielectric withstanding
500V AC

Betriebstemperatur
-40°C bis +105°C


Operating temperature
-40°C to +105°C



Gerade Stifte / Straight pins

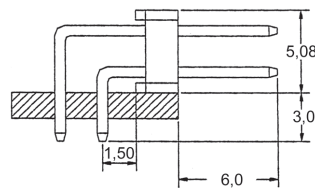

Gewinkelte Stifte / Angled pins

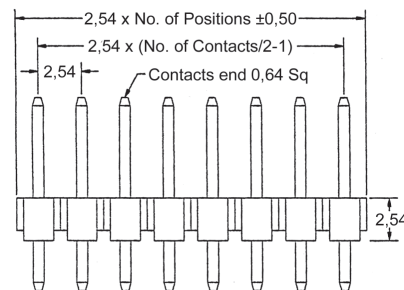

Bestellcode: **AWL254** **D** - **x** - **x** - **x** - **x**
 Ordercode :

Bitte „x“ durch die unten geeignete Option ersetzen
 Please replace „x“ with appropriate option listed below

1.

Ausführung

- G -gerade
- A -abgewinkelt

Version

- G -straight
- A -right angled

2.

Oberfläche

- G -flash vergoldet *
- Z -verzinkt
- S -selektiv

Contact plating

- G -flash gold *
- Z -tinn
- S -selective

3.

Polzahl

04 - 80

Number of contacts

04 - 80

4.

Stiftlänge

- D -A=6mm, B=3mm*
- A -A=7mm, B=3mm (nur gerade)

Pin length

- D -A=6mm, B=3mm*
- A -A=7mm, B=3mm (only straight)

* Standard

D-Sub / Hoods
Centronics

Multiflex

Modular

USB

Switches

Powercords
Powersockets

MiniDIN

DIN4161x
Hardmetric

Sockets + Strips
Jumper