




HESTORE.HU

elektronikai alkatrész áruház

EN: This Datasheet is presented by the manufacturer.

Please visit our website for pricing and availability at www.hestore.hu.

STS SEPARATED TWO SIDE MACHINE PINS STANDARD 2.54 MM (0.100")

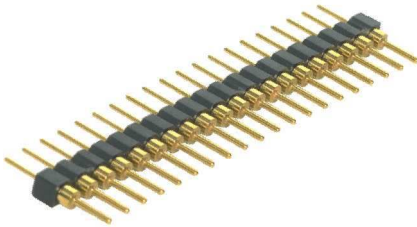

Specification:

Insulator: Thermoplastic (UL94V-0)
 Contact: Copper Alloy
 Storage Temperature: -20°C ~ 85°C
 Operating Temperature: 0°C ~ 70°C
 Contact Resistance: 20 mΩ max. (initial)
 Insulation Resistance: 1000 MΩ min.
 Dielectric Withstanding Voltage: 1000 VAC (1 minute)

STS 20P-K

Mounting Type:

K - straight
 R - right angle

Row:

P - single
 D - double

No. of Contacts:

N = 01...40 - single row
 N = 04...80 - double row

Separated Two Side Machine Pins

