





**HESTORE.HU**




elektronikai alkatrész áruház

**EN:** This Datasheet is presented by the manufacturer.

Please visit our website for pricing and availability at [www.hestore.hu](http://www.hestore.hu).

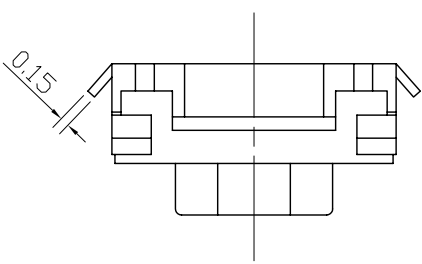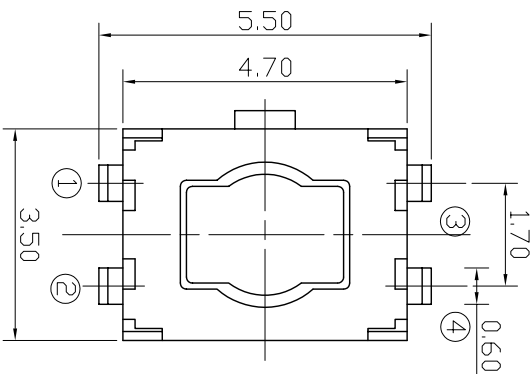

P.C.B LAYOUT

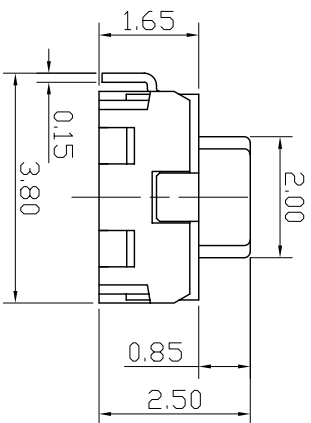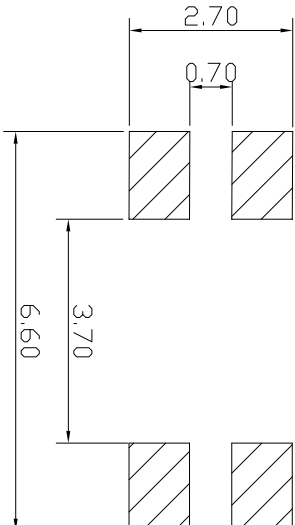

CIRCUIT

Rating	DC12V 50mA
Contact Resistance	500mΩMax.
Insulation Resistance	>100MΩDC100V
Withstand Voltage	AC250V 1min.
Soldering Temper.	230°C Max.
Electrical Life	100,000 cycles
Ambient Temper. Used	-20°C to 70°C
Ambient Humidity Used	<85% RH
Operating Force	160 <sup>+70</sup> <sub>-40</sub> gf
Travel	0.3 <sup>+0.1</sup> <sub>-0.2</sub> mm

REVISION	DESCRIPTION	REVISED BY	TOLERANCES X±0.3	ANGLE 1/2°	SCALE	UNIT mm	PART NAME	TS47 SPEC DRAWING	DWG NO
△			DRAWN BY 吳美玉	ERIC	8:1				S0216A
△			CHECKED BY 吳美玉	APPROVED BY 吳美玉	DATE 2004/03/24	PART NO	TS47-25MV160		
△									
△									