



HESTORE.HU

elektronikai alkatrész áruház

EN: This Datasheet is presented by the manufacturer.

Please visit our website for pricing and availability at www.hestore.hu.




HD9911,2,3 RFID Heavy-Duty Tag Specification

Model No.	HD9911	HD9912	HD9913
Reading Distance	60mm	60mm	60mm
Base on GK4001 chip, with EM9917 reader			
Operating temperature	-40°C to 100°C	-40°C to 100°C	-40°C to 100°C
Storage temperature	-40°C to 80°C	-40°C to 80°C	-40°C to 80°C
Material	PCB-FR4	PCB-FR4	PCB-FR4
Technology			
GK4001 (125KHz, 64bit, R/O)	Y	Y	Y
EM4102 (125KHz, 64bit, R/O)	Y	Y	Y
I-Code (13.56MHz, 512bit, R/W)	Y	Y	Y
Mifare 1 (13.56MHz, 8kbit, R/W)	Y	Y	Y
Temic E5557 (125KHz, 256bit, R/W)	Y	Y	Y
Hitag 1 (125KHz, 2048bit, R/W)	Y	Y	Y
Hitag 2 (125KHz, 256bit, R/W)	Y	Y	Y
Legic 256 (13.56MHz, 2048bit, R/W)	Y	Y	Y



Application: Door Access Control, Burglar Prevention, Patrol Management, Personal Identification, Car Park Control, Member Club Management, etc.

Dimension: (unit: mm)

HD9911

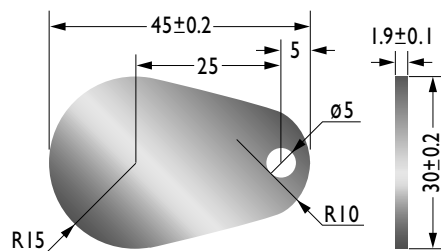

HD9912



HD9913

