





**HESTORE.HU**

elektronikai alkatrész áruház

**EN:** This Datasheet is presented by the manufacturer.

Please visit our website for pricing and availability at [www.hestore.hu](http://www.hestore.hu).

D1RFRD006

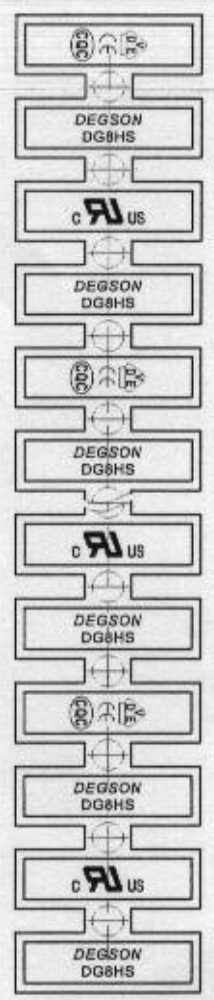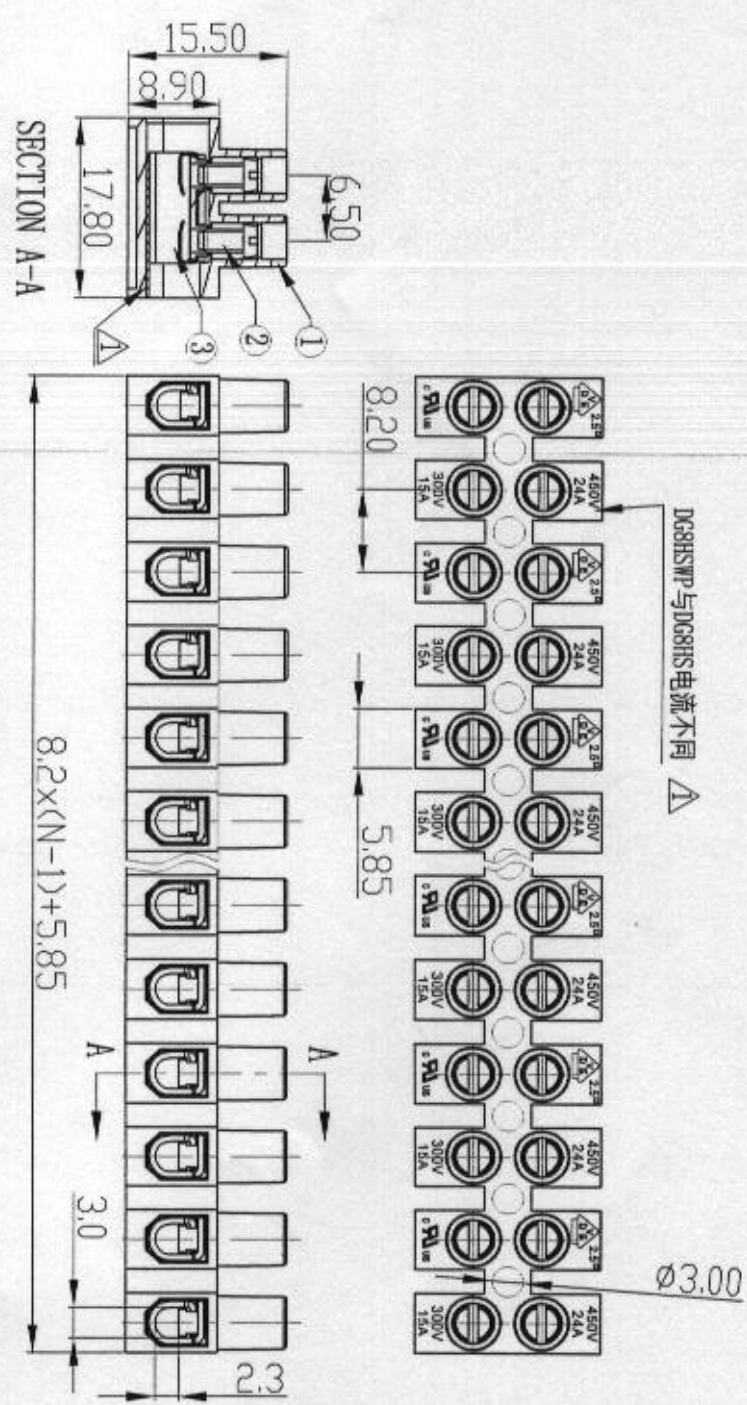

Pitch range in mm	Nominal dimension range											
	over	over	over	over	over	over	over	over	over	over	over	over
to 5	10	10	10	10	10	10	10	10	10	10	10	10
to 10	10	24	30	60	100	150						
to 15	to 10.25 ± 0.2 ± 0.3 ± 0.5 ± 0.7 ± 1.0 max/min											

- Notes:
1. Pitch: 8.2, Poles: 2-12P
  2. Rated voltage/Current: UL1059 300V 15A  
VDE 450V 24A
  3. Operation temperatures: -40°C ~ +105°C
  4. Withstanding Voltage: AC2500V/1Min
  5. Insulation Resistance: 5000MΩ/DC1000V
  6. Tier Range: 20-14AWG, 0.5-2.5mm<sup>2</sup>
  7. Max. Torque Value: M2.5, 4.08kgf.cm
  8. Undimensioned Tolerances:

3	DG8HS-Current carrier	X0000003250(H)	XX	Steel	C <sup>3</sup> Zn
2	DG8H- Screws M2.5	S0000001110(H)	XX*2	Steel	C <sup>3</sup> Zn

ITEM 1		NAME OF PART		NO. OF PART		QTY		MATERIAL		NOTES	
1		DG8HWP Housing		20MSA01YXXA (H)		1		PA66		UL94V-2	

DEGSON		DEGSON ELECTRONICS CO., LTD	
NAME		DG8HWP-1.2-XXP-1Y-100A (H)	
DRAWING NO.		DG8HWP-E01	
/PART NO.		A4	
DD NOT SCALE DRAWING		SHEET 1 OF 1	



REV	ECD	DESCRIPTION	DRFT	DATE
1		增加DG8HWP零件及规格变更	Zhangy	04/08/09