



HESTORE.HU

elektronikai alkatrész áruház

EN: This Datasheet is presented by the manufacturer.

Please visit our website for pricing and availability at www.hestore.hu.

SPECIFICATIONS



Electrical

Current Rating: 5A AC, DC
 Voltage Rating: 250V AC, DC
 Operating Temp.: -25°C ~ +85°C
 Insulation Resistance: 1000MΩ/ min.
 Dielectric Withstanding Voltage: 1500V AC/ min.
 Contact Resistance: 10mΩ/ max.



Material

Material: Nylon66, UL94V-2

Poles	Dimension mm (in.)	
	A	B
2	3.96	8.00
3	7.92	12.00
4	11.88	15.90
5	15.84	20.00
6	19.80	24.00
7	23.76	27.90
8	27.72	31.70
9	31.86	35.80
10	35.64	39.90
11	39.60	43.90
12	43.56	47.80
13	47.52	51.80
14	51.48	55.70
15	55.44	59.80
16	59.40	63.80

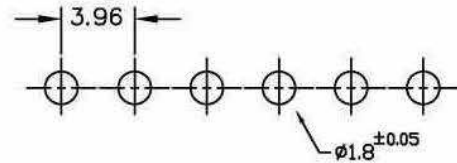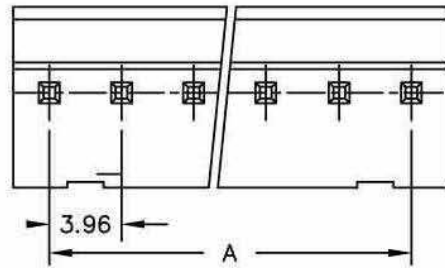

PCB LAYOUT COMPONENT SIDE

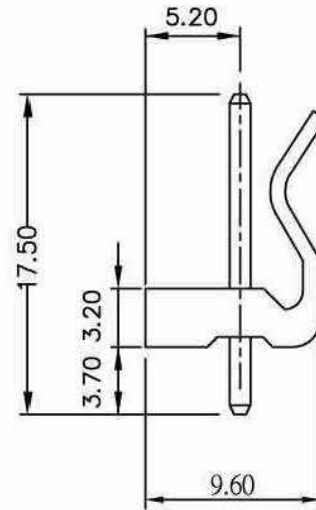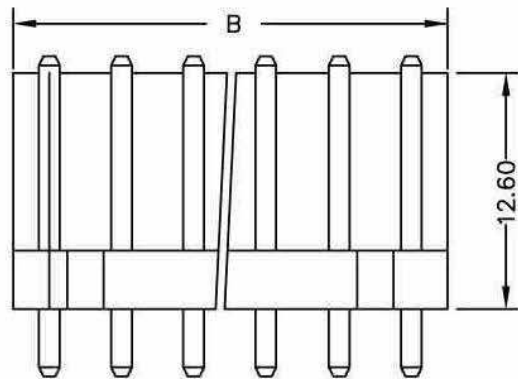

Gold Star Connectors Co., Ltd.

UNIT

SCALE

PART NAME

MM

WAFER 180° 3,96mm

制表日: 2005/08/31

DRAWING.

APPROVED

APPD.

CKD.

TOLERANCE

PART NO.

REV.

Kevin

NCW396-xxS

A