






HESTORE.HU

elektronikai alkatrész áruház

EN: This Datasheet is presented by the manufacturer.

Please visit our website for pricing and availability at www.hestore.hu.

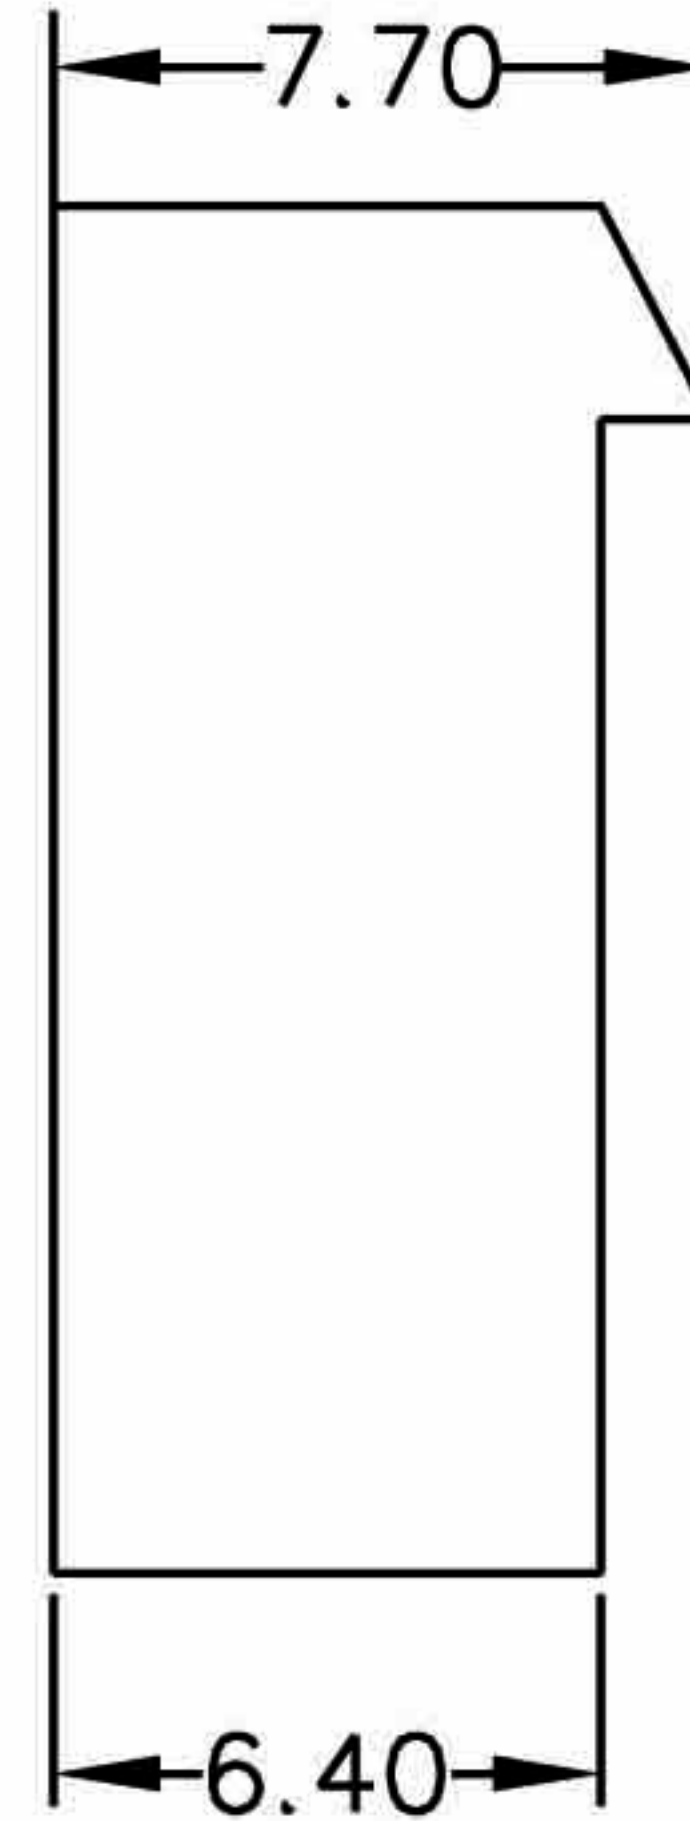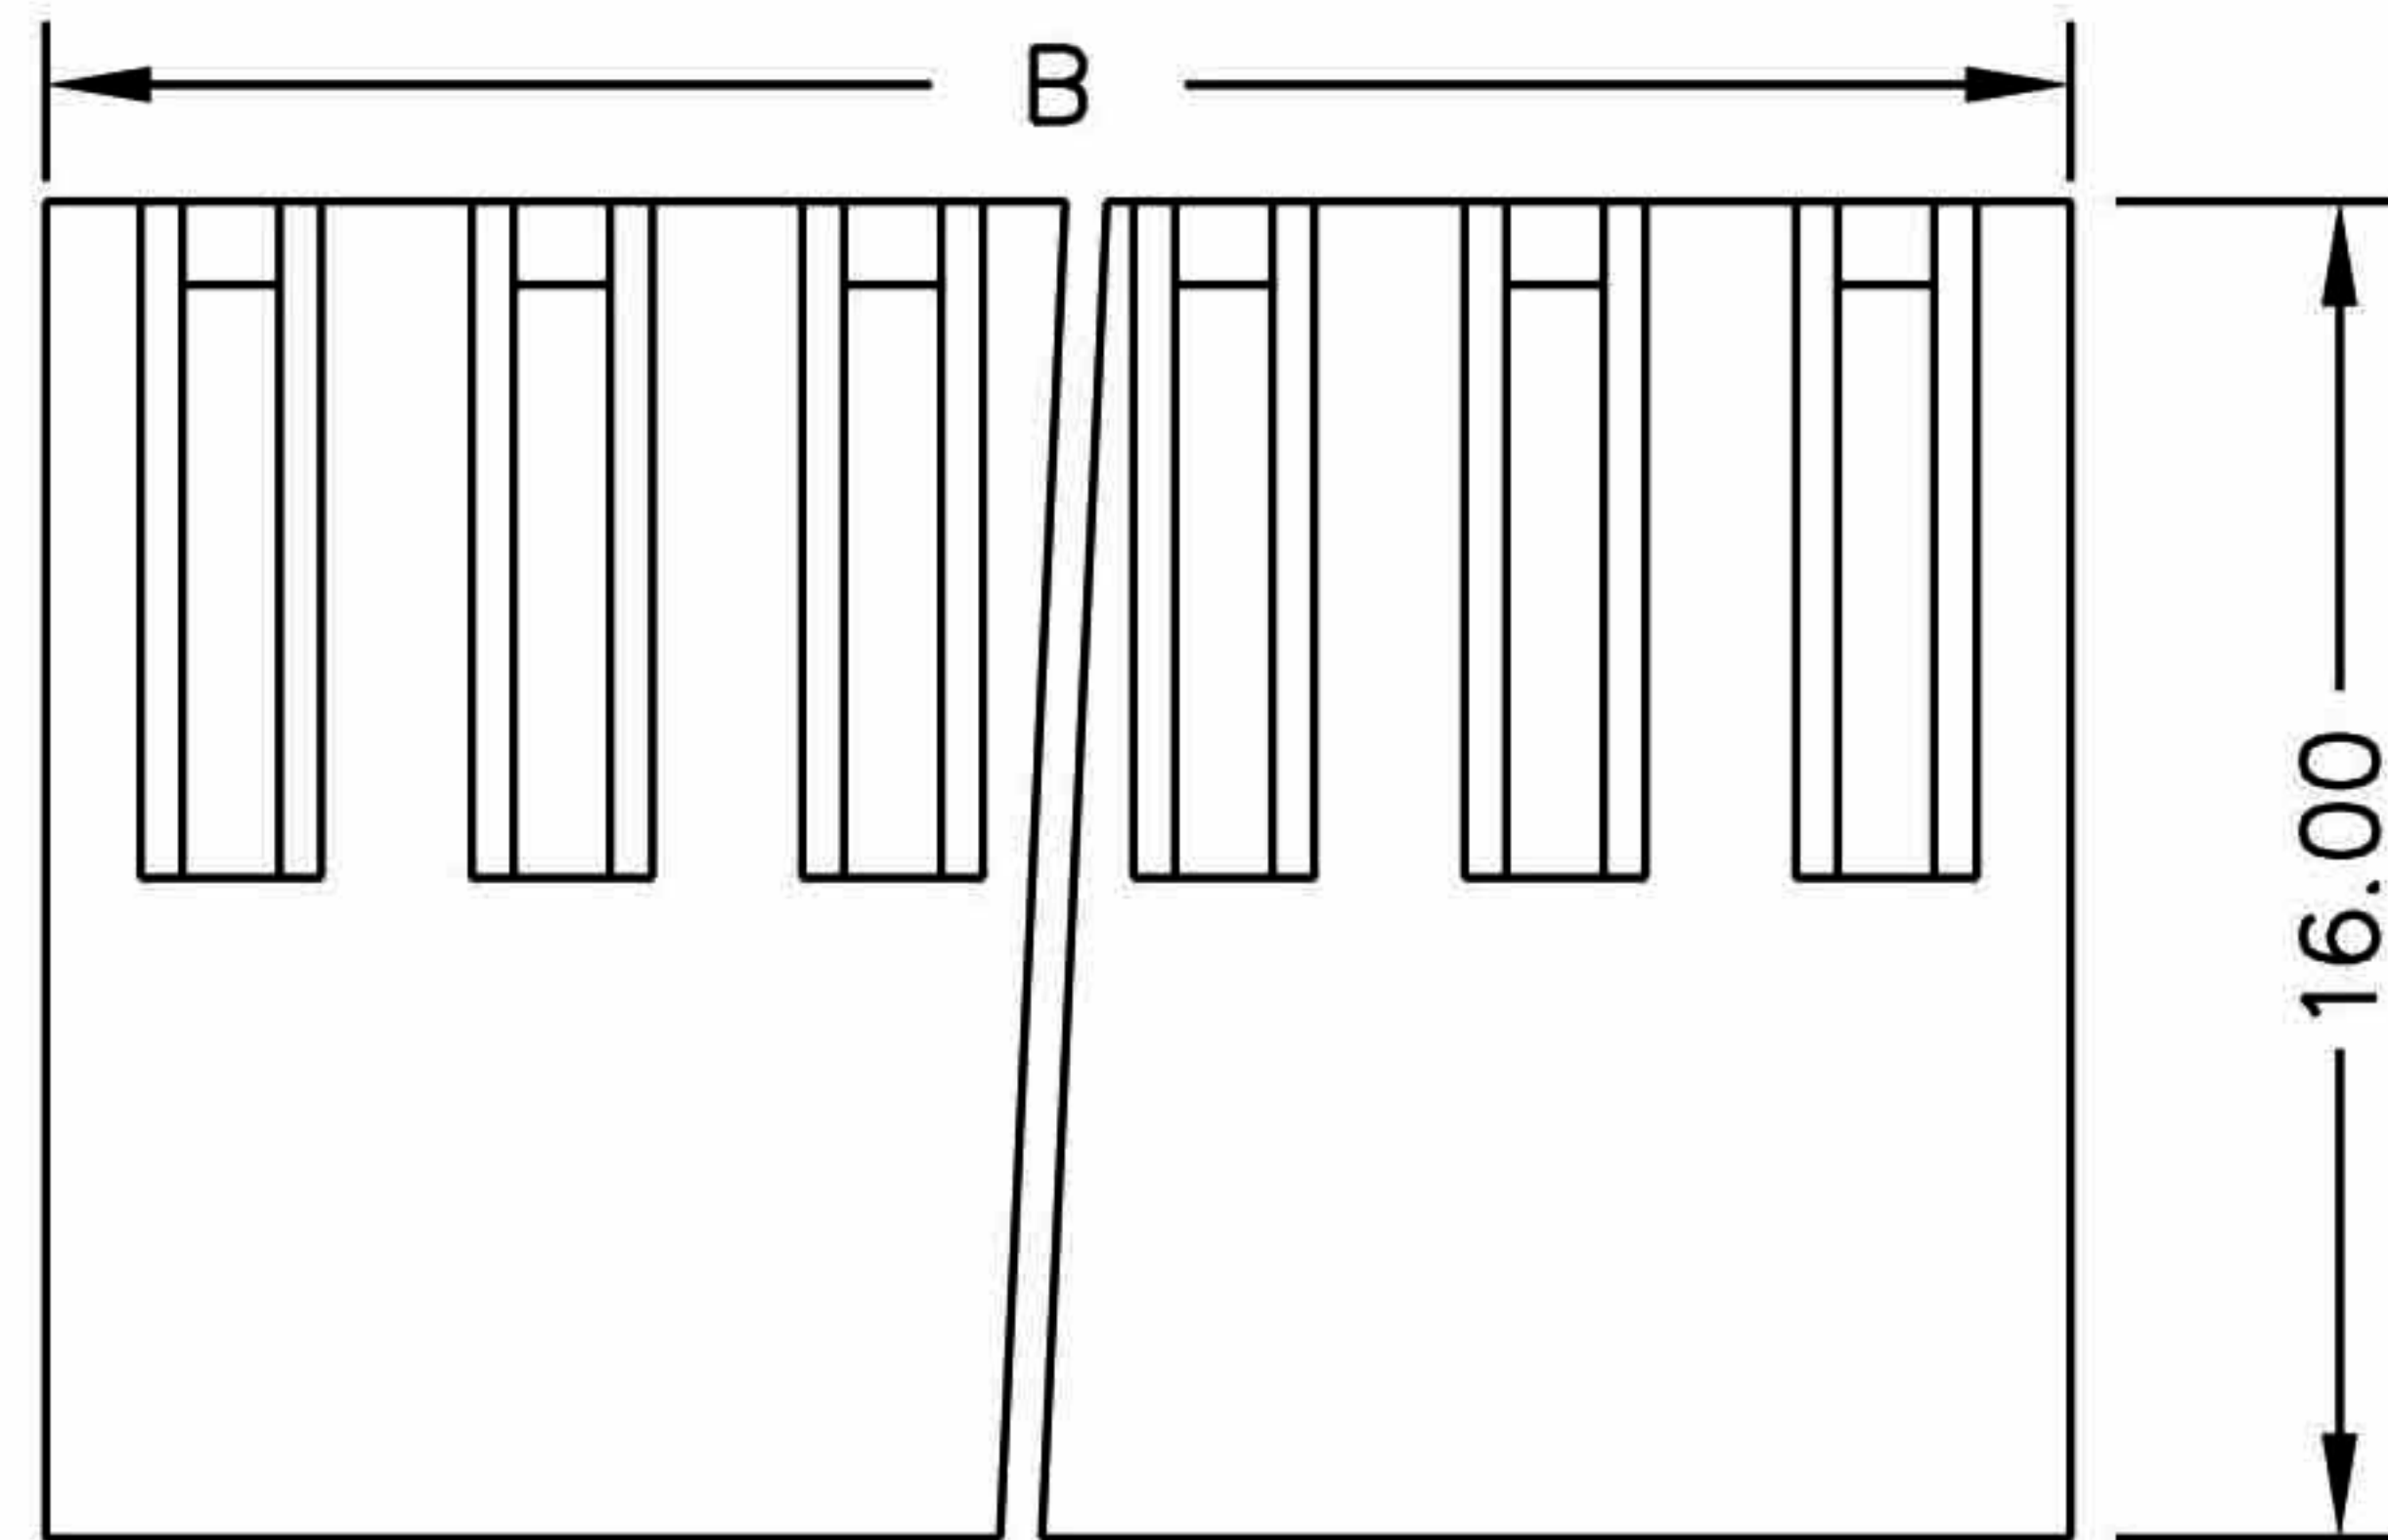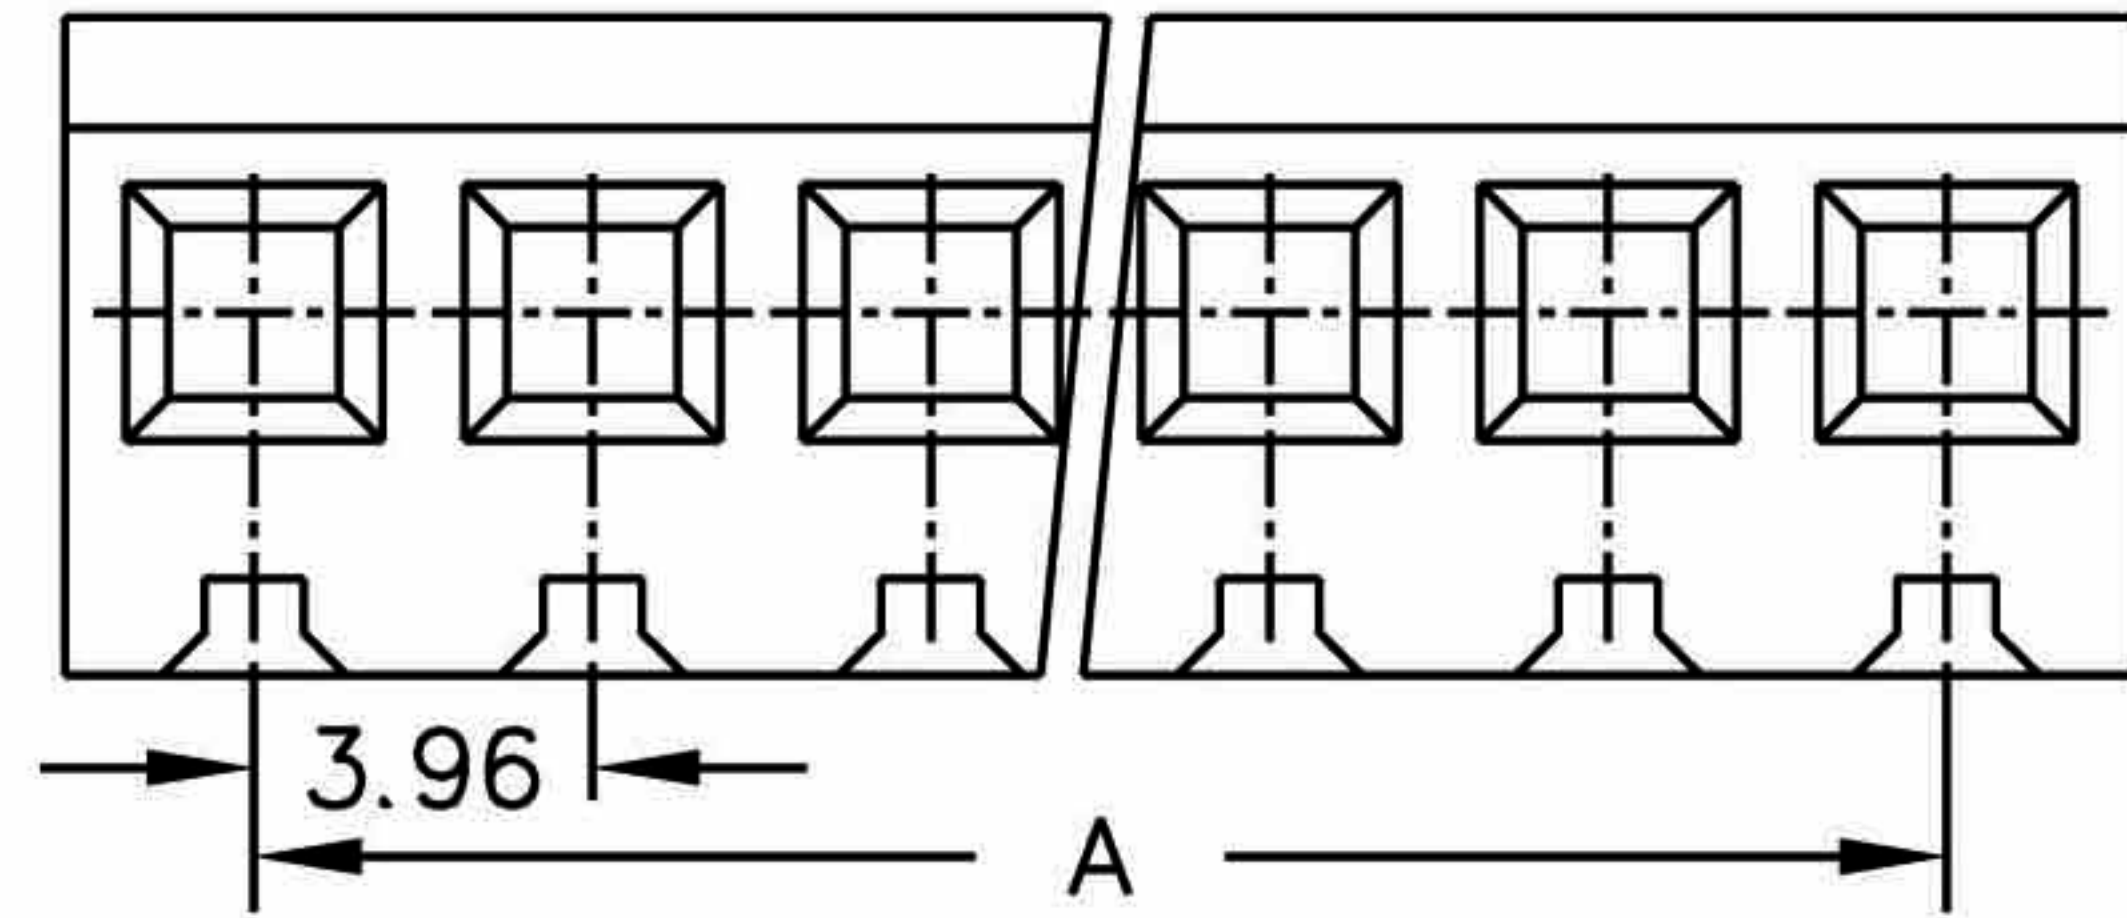

SPECIFICATIONS

Electrical

Current Rating: 5A AC, DC

Voltage Rating: 250V AC, DC

Operating Temp.: -25°C ~ +85°C

Insulation Resistance: 1000mΩ/ min.

Dielectric Withstanding Voltage: 1500V AC/ min.

Contact Resistance: 10mΩ/ max.

Material

Material: Nylon66, UL94V-2

Poles	Dimension mm (in.)	
	A	B
2	3.96	8.45
3	7.92	12.39
4	11.88	16.35
5	15.84	20.31
6	19.80	24.27
7	23.76	28.23
8	27.72	32.19
9	31.68	36.15
10	35.64	40.11
11	39.60	44.07
12	43.56	48.03
13	47.52	51.99
14	51.48	55.95
15	55.44	59.91
16	59.40	63.87
17	63.36	67.83
18	67.32	71.79
20	75.24	79.71

Gold Star Connectors Co., Ltd.

UNIT

SCALE

PART NAME

MM

MX3.96mm WITH LOCKING RIB

制表日:2005/09/12

DRAWING.

APPROVED

APPD.

CKD.

TOLERANCE

PART NO.

REV.

kevin

NCH396-xx

A