



HESTORE.HU

elektronikai alkatrész áruház

EN: This Datasheet is presented by the manufacturer.

Please visit our website for pricing and availability at www.hestore.hu.

I to 3 Channels AM (OOK) SAW transmitters with HCS 300 Encoder

3V

HCS 300

TX RF

SAW

ANTENNA

HCS-TX-3

0.5mW

battery

3V

Lithium Long Life

3V

Information subject to change without notice


Description

Small dimension, hand-held RF transmitter with HCS 300 rolling code encoder. Ideal for remote control applications requiring high security level. High performances from 3V lithium battery. Null consumption in stand-by. In compliance with EN 300 200, EN 301 489 & EN 60950.

Descrizione

Trasmettitore RF palmare di ridotte dimensioni dotati di encoder a codice dinamico HCS300. Ideale per applicazioni dove sia richiesto un elevato grado di sicurezza. Elevate prestazioni grazie all'impiego di batterie al litio 3V. Consumo nullo in stand-by. Conforme alle Normative Europee EN 300 220, EN 301 489 ed EN 60950.

Mechanical Dimensions

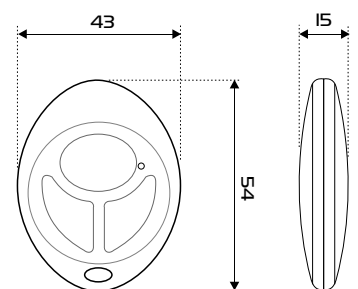

Technical Specification

Ta = 25 °C

CHARACTERISTICS	MIN	TYP	MAX	UNIT
V _s Lithium battery supply • Alimentazione con batteria al Litio		3		Vdc
I _s Supply Current • Corrente assorbita		10		mA
F _c RF carrier frequency • Frequenza portante RF		433.92		MHz
P _o Effective radiated power • Potenza irradiata			0.5	mW
HCS 300 encoder • Encoder HCS 300		63		bit
T _B Lithium battery life • Durata batteria	3		5	years
T _{OP} Operating temperature range • Temperatura di lavoro	+10		+55	°C

Product Code:

650200609 (HCS-TX-1)
 650200610 (HCS-TX-2)
 650200606 (HCS-TX-3)