




HESTORE.HU

elektronikai alkatrész áruház

EN: This Datasheet is presented by the manufacturer.

Please visit our website for pricing and availability at www.hestore.hu.

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	LJH 05/24/05'		

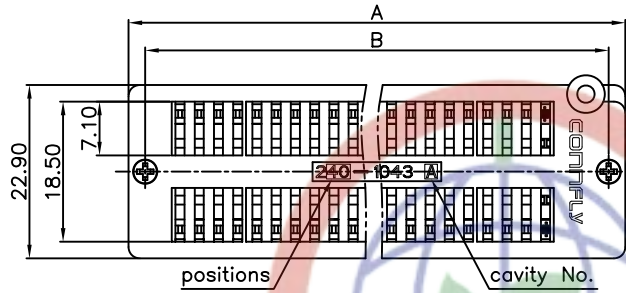



Positions	A	B
24	45.3	40.9
28	50.4	46.0
32	55.5	51.1
40	65.6	61.2
48	75.8	71.4

1. FEATURES




- 1.1. Compact mechanical construction to ensure long term life.
- 1.2. Zero insertion and extraction pressure.
- 1.3. standard 0.100(2.54mm) IC pitch, easy to mount in PC board.
- 1.4. All plastics are UL 94v-0 grade fire retardant.
- 1.5. Gold plated contact to ensure low contact resistance and long operation life.

2. SPECIFICATION

- 2.1. ELECTRICAL:
 - 2.1.1. Rating:50VDC,100mA.
 - 2.1.2. Contact Resistance: 50mΩ Max.
 - 2.1.3. Insulation Resistance:1000MΩ Min.
 - 2.1.4. Dielectric withstanding volatage:500VDC min. for 60 seconds.Capacitance between adjacent contacts.
- 2.2. MECHANICAL AND ENVIRONMENTAL
 - 2.2.1. Temperature Rating:
 - 2.2.2. Operating:-40℃ to +105℃
 - 2.2.3. Durability:25,000 cycles(with load)
 - 2.2.4. Humidity:95%RH,40℃ for 48 Hrs.
 - 2.2.5. Solderability:After flux 230℃ for 5±0.5 Seconds,95% coverage
 - 2.2.6. Soldering Heat:260±5℃ for 5±1 Seconds.

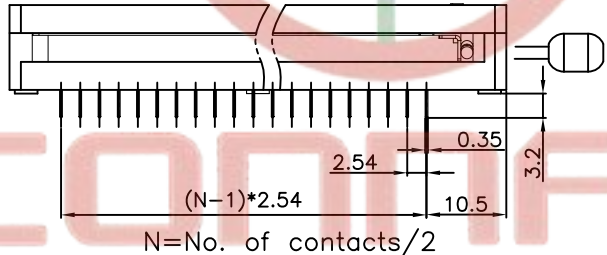

3. PRODUCT NUMBER CODE:

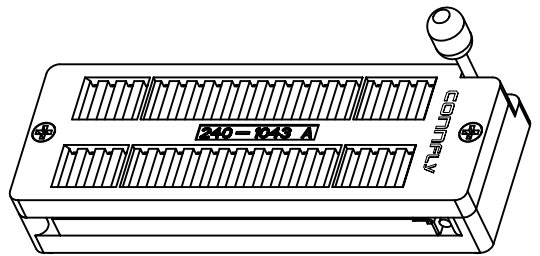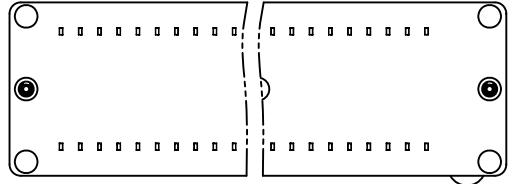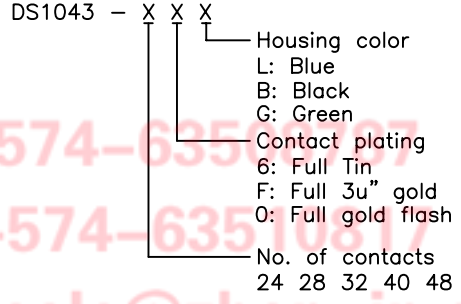

Tel:86-574-6350897
 Fax:86-574-63510817
 E-mail:sale@zhenqin.com.cn
 Http://www.connfly.com

GENERAL TOLERANCE	ANGLE TOLERANCE	PROJECTION		TITLE
X. ±0.60	X. ±5°	UNITS	mm	ZIF SOCKET
.X ±0.38	.X ±3°	SHEET SIZE	A4	SERIES DS1043 SERIES
.XX ±0.25	.XX ±2°	晨翔电子有限公司 CONNFLY CONNFLY ELECTRONIC CO. LTD		
DRAWING TYPE	CUSTOMER			
SCALE	1:1 SHEET 1 OF 1			
DRAWING NO.	C-DS1043-XXX			