




**HESTORE.HU**

elektronikai alkatrész áruház

**EN:** This Datasheet is presented by the manufacturer.


Please visit our website for pricing and availability at [www.hestore.hu](http://www.hestore.hu).

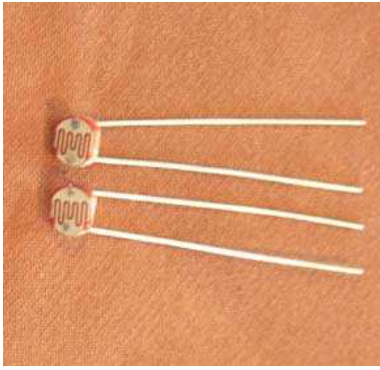

- ▲ Epoxy encapsulated
- ▲ Quick response
- ▲ Small size
- ▲ High sensitivity
- ▲ Reliable performance
- ▲ Good characteristic of spectrum

Light Resistance at 10Lux (at 25°C)	8~20KΩ
Dark Resistance at 0 Lux	1.0MΩ(min)
Gamma value at 100-10Lux	0.7
Power Dissipation(at 25°C)	100mW
Max Voltage (at 25°C)	150V
Spectral Response peak (at 25°C)	540nm
Ambient Temperature Range:	- 30~+70°C

### Outline

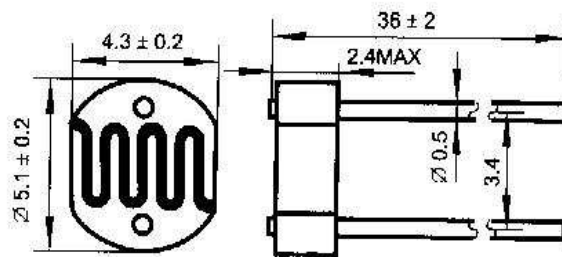


### Measuring Conditions


1. Light Resistance:  
measured at 10 lux with standard light A (2854k color temperature) and 2h pre-illumination at 400-600 lux prior to testing.
2. Dark Resistance:  
measured 10 seconds after pulsed 10 lux.
3. Gamma Characteristic:  
between 10 lux and 100 lux and given by  

$$T = \frac{\log(R_{10}/R_{100})}{\log(100/10)} = \log(R_{10}/R_{100})$$
 R10, R100 cell resistance at 10 lux and 100 lux.  
The error of T is +0.1.
4. Pmax:  
Max. power dissipation at ambient temperature of 25°C.
5. Vmax:  
Max. voltage in darkness that may be applied to the cell continuously.

### Illuminance Vs. Photo Resistance

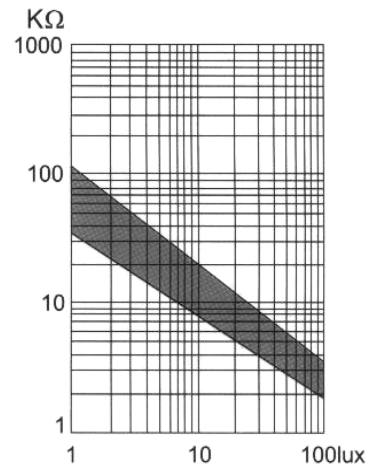

### Spectral Response

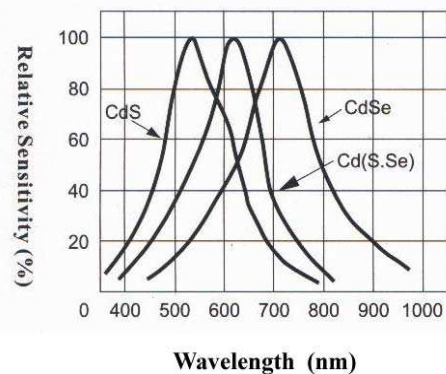

**LIDA OPTICAL&ELECTRONIC CO., LTD.**

254,Zhong zhou road, Nanyang, Henan,P.R.C

TEL: +86-377-6313 0034

FAX: +86-377-6315 2372

E-mail: sale@nylida.com

[Http://www.nylida.com](http://www.nylida.com)