



HESTORE.HU

elektronikai alkatrész áruház


EN: This Datasheet is presented by the manufacturer.

Please visit our website for pricing and availability at www.hestore.hu.



Features

- ✧ Surge overload ratings to 25 amperes peak
- ✧ Ideal for printed circuit board
- ✧ Reliable low cost construction utilizing molded plastic technique results in inexpensive product
- ✧ High temperature soldering: 260°C/ 10 seconds at terminals
- ✧ Mounting position: Any
- ✧ Weight: 0.12 gram
- ✧ Green compound with suffix "G" on packing code & prefix "G" on datecode.

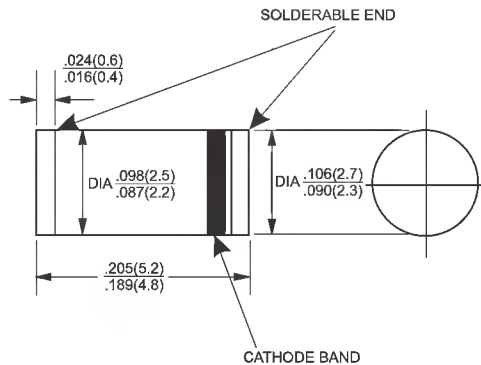

Dimensions in inches and (millimeters)

Maximum Ratings and Electrical Characteristics

Rating at 25 °C ambient temperature unless otherwise specified.

Single phase, half wave, 60 Hz, resistive or inductive load.

For capacitive load, derate current by 20%

Type Number	Symbol	LL5817	LL5818	LL5819	Units
Maximum Recurrent Peak Reverse Voltage	VRRM	20	30	40	V
Maximum RMS Voltage	VRMS	14	21	28	V
Maximum DC Blocking Voltage	VDC	20	30	40	V
Maximum Average Forward Rectified Current @ _{T_L} = 90 °C	I(AV)	1.0			A
Peak Forward Surge Current, 8.3 ms Single Half Sine-wave Superimposed on Rated Load (JEDEC method)	IFSM	25			A
Maximum Instantaneous Forward Voltage @1.0A	V _F	0.450	0.550	0.600	V
Maximum Instantaneous Forward Voltage @3.0A	V _F	0.750	0.875	0.900	V
Maximum DC Reverse Current @ T _A =25 °C at Rated DC Blocking Voltage @ T _A =100 °C	I _R	0.1 5			mA mA
Typical Junction Capacitance (Note 2)	C _j	110			pF
Typical Thermal Resistance (Nota 1)	R _{θJA}	80			°C/W
Operating and Storage Temperature Range	T _J ,T _{STG}	- 65 to + 125 / - 65 to + 150			°C

- Notes:
1. Thermal Resistance Junction to Ambient
 2. Measured at 1 MHz and Applied Reverse Voltage of 4.0 Volts D.C.

RATINGS AND CHARACTERISTIC CURVES (LL5817 THRU LL5819)

FIG.1- MAXIMUM FORWARD CURRENT DERATING CURVE

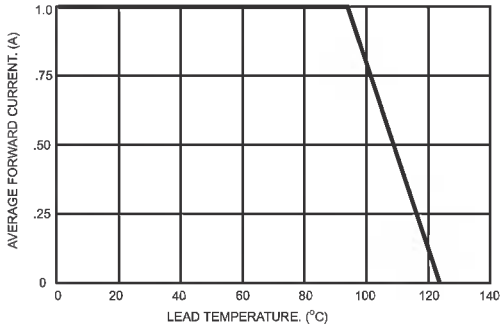


FIG.2- MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

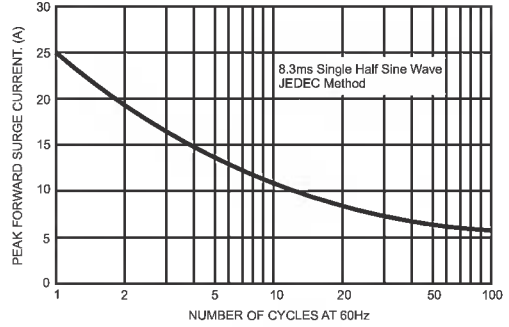


FIG.3- TYPICAL FORWARD CHARACTERISTICS

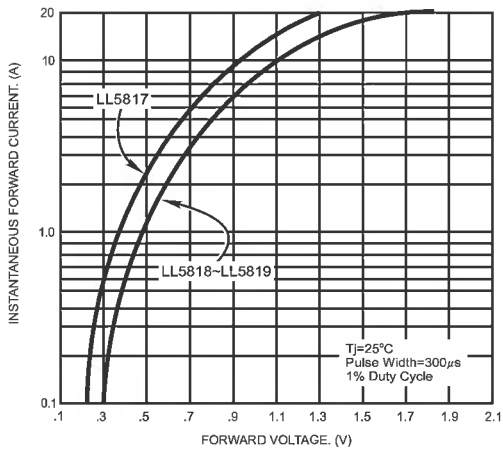


FIG.4- TYPICAL REVERSE CHARACTERISTICS

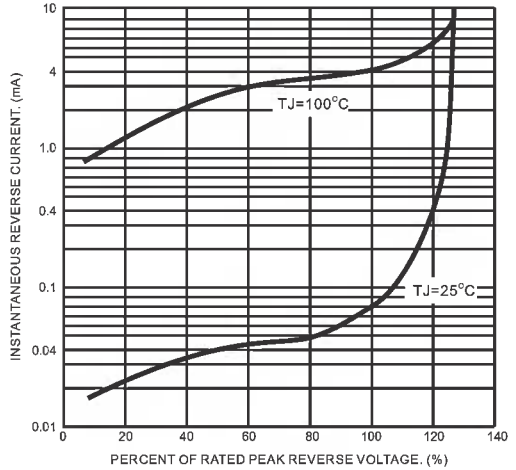


FIG.5- TYPICAL JUNCTION CAPACITANCE

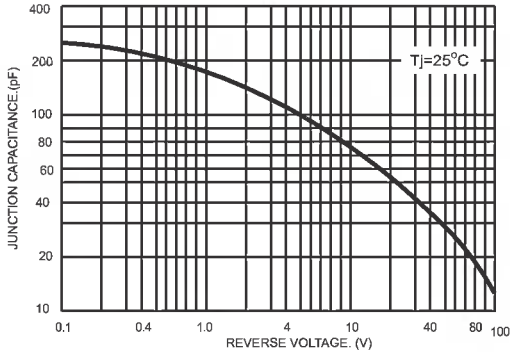


FIG.6- TYPICAL TRANSIENT THERMAL CHARACTERISTICS

