



HESTORE.HU

elektronikai alkatrész áruház

EN: This Datasheet is presented by the manufacturer.

Please visit our website for pricing and availability at www.hestore.hu.



MBR25..CT MBRB25..CT MBR25..CT-1

SCHOTTKY RECTIFIER

30 Amp

$I_{F(AV)} = 30\text{Amp}$
 $V_R = 35 - 45\text{V}$

Major Ratings and Characteristics







| Characteristics | Values | Units |
|---|------------|------------------|
| $I_{F(AV)}$ Rectangular waveform (Per Device) | 30 | A |
| I_{FRM} @ $T_C = 130^\circ\text{C}$ (Per Leg) | 30 | A |
| V_{RRM} | 35 - 45 | V |
| I_{FSM} @ tp = 5 μs sine | 1060 | A |
| V_F @ 30 Apk, $T_J = 125^\circ\text{C}$ | 0.73 | V |
| T_J range | -65 to 150 | $^\circ\text{C}$ |

Description/ Features

This center tap Schottky rectifier has been optimized for low reverse leakage at high temperature. The proprietary barrier technology allows for reliable operation up to 150° C junction temperature. Typical applications are in switching power supplies, converters, free-wheeling diodes, and reverse battery protection.

- 150° C T_J operation
- Center tap TO-220 and D²Pak packages
- Low forward voltage drop
- High purity, high temperature epoxy encapsulation for enhanced mechanical strength and moisture resistance
- High frequency operation
- Guard ring for enhanced ruggedness and long term reliability

Case Styles

| MBR25..CT | MBRB25.. CT | MBR25..CT -1 |
|---|---|---|
|  |  |  |
|  <p>TO-220</p> |  <p>D²PAK</p> |  <p>TO-262</p> |

Voltage Ratings

| Parameters | MBR2535CT MBRB2535CT MBR2535CT-1 | MBR2545CT MBRB2545CT MBR2545CT-1 |
|--|--|--|
| V _R Max. DC Reverse Voltage (V) | 35 | 45 |
| V _{RWM} Max. Working Peak Reverse Voltage (V) | | |

Absolute Maximum Ratings

| Parameters | Values | Units | Conditions |
|--|--------|-------|---|
| I _{F(AV)} Max. Average Forward Current (Per Leg) (Per Device) | 15 | A | @ T _C = 130° C, (Rated V _R) |
| | 30 | | |
| I _{FRM} Peak Repetitive Forward Current (Per Leg) | 30 | A | Rated V _R , square wave, 20kHz T _C = 130° C |
| I _{FSM} Non Repetitive Peak Surge Current | 1060 | A | 5µs Sine or 3µs Rect. pulse Following any rated load condition and with rated V _{RWM} applied Surge applied at rated load conditions halfwave, single phase, 60Hz |
| | 150 | | |
| E _{AS} Non-Repetitive Avalanche Energy | 16 | mJ | (Per Leg) T _J = 25° C, I _{AS} = 2 Amps, L = 8 mH |
| I _{AR} Repetitive Avalanche Current (Per Leg) | 2 | A | Current decaying linearly to zero in 1 µsec Frequency limited by T _J max. V _A = 1.5 x V _R typical |

Electrical Specifications

| Parameters | Values | Units | Conditions |
|---|--------|-------|--|
| V _{FM} Max. Forward Voltage Drop (1) | 0.82 | V | @ 30A T _J = 25° C |
| | 0.73 | V | @ 30A T _J = 125° C |
| I _{RM} Max. Instantaneous Reverse Current (1) | 0.2 | mA | T _J = 25° C |
| | 40 | mA | T _J = 125° C Rated DC voltage |
| V _{F(TO)} Threshold Voltage | 0.355 | V | T _J = T _J max. |
| r _t Forward Slope Resistance | 12.3 | mΩ | |
| C _T Max. Junction Capacitance | 700 | pF | V _R = 5V _{DC} , (test signal range 100Khz to 1Mhz) 25° C |
| L _S Typical Series Inductance | 8.0 | nH | Measured from top of terminal to mounting plane |
| dv/dt Max. Voltage Rate of Change (Rated V _R) | 10000 | V/ µs | |

(1) Pulse Width < 300µs, Duty Cycle <2%

Thermal-Mechanical Specifications

| Parameters | Values | Units | Conditions |
|--|------------|---------|---|
| T _J Max. Junction Temperature Range | -65 to 150 | °C | |
| T _{stg} Max. Storage Temperature Range | -65 to 175 | °C | |
| R _{thJC} Max. Thermal Resistance Junction to Case (Per Leg) | 1.5 | °C/W | DC operation |
| R _{thCS} Typical Thermal Resistance Case to Heatsink | 0.50 | °C/W | Mounting surface, smooth and greased Only for TO-220 |
| wt Approximate Weight | 2 (0.07) | g (oz.) | |
| T Mounting Torque | Min. | 6 (5) | Non-lubricated threads |
| | Max. | 12 (10) | |

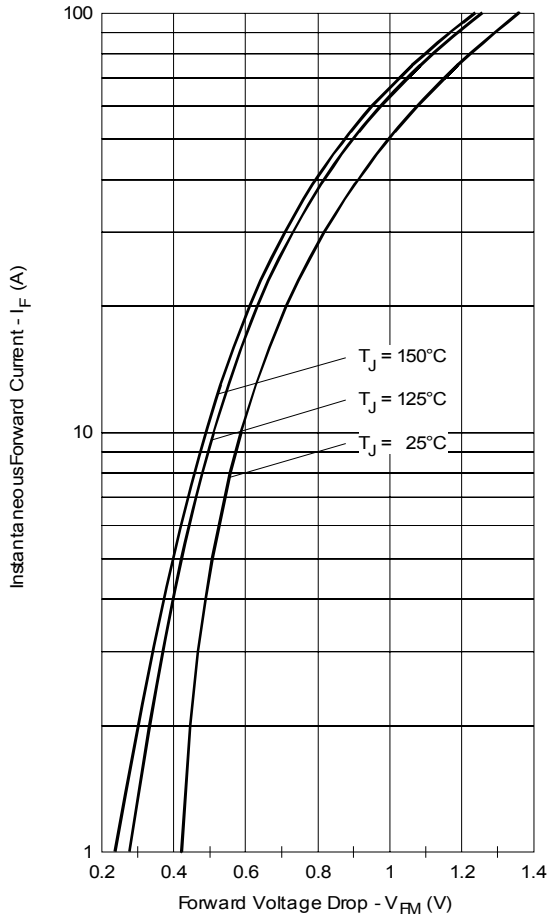


Fig. 1 - Max. Forward Voltage Drop Characteristics (Per Leg)

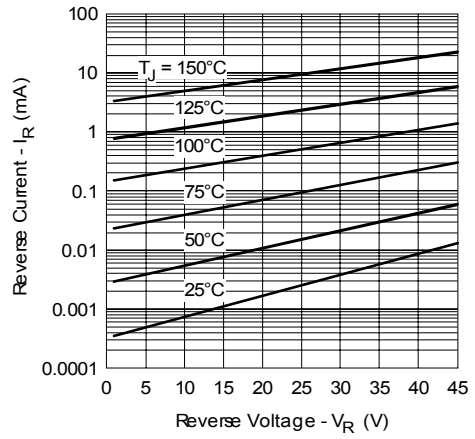


Fig. 2 - Typical Values Of Reverse Current Vs. Reverse Voltage (Per Leg)

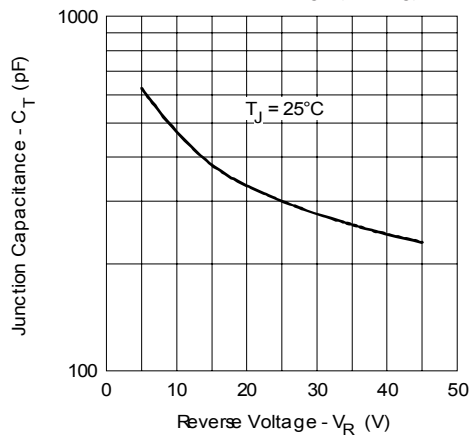


Fig. 3 - Typical Junction Capacitance Vs. Reverse Voltage (Per Leg)

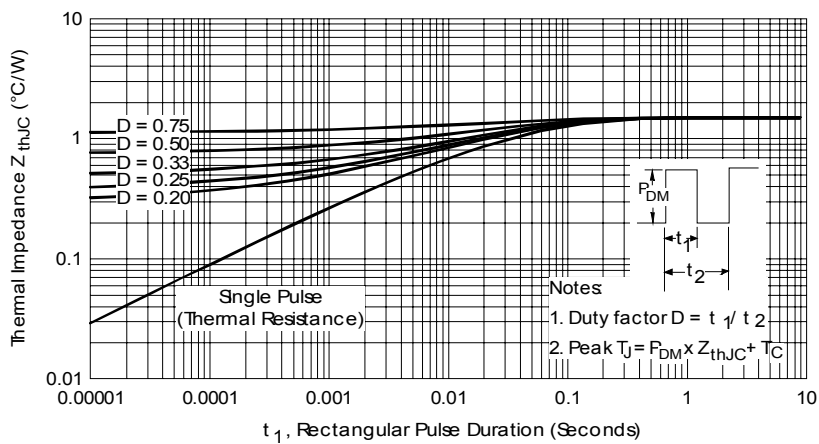


Fig. 4 - Max. Thermal Impedance Z_{thJC} Characteristics (Per Leg)

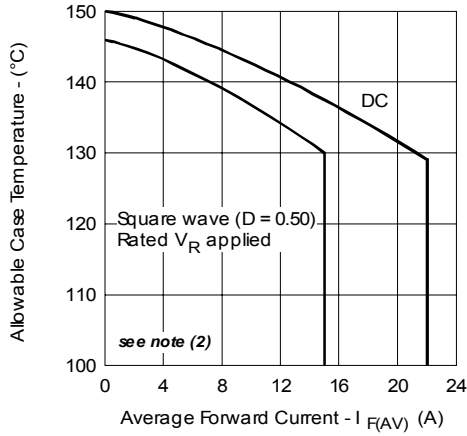


Fig. 5 - Max. Allowable Case Temperature Vs. Average Forward Current (Per Leg)

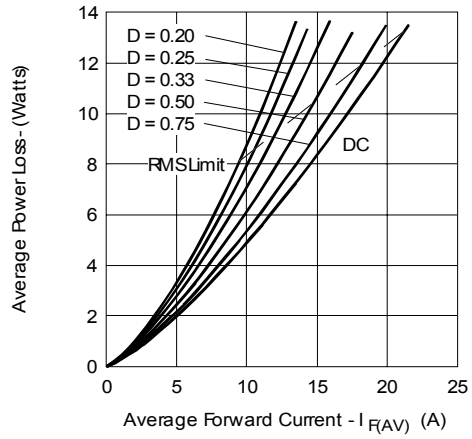


Fig. 6 - Forward Power Loss Characteristics (Per Leg)



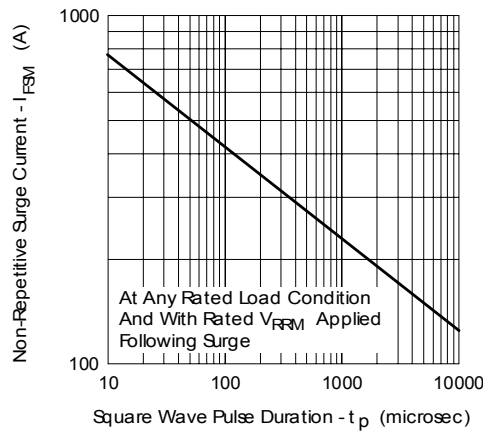



Fig. 7 - Max. Non-Repetitive Surge Current (Per Leg)

- (2) Formula used: $T_C = T_J - (Pd + Pd_{REV}) \times R_{thJC}$;
 $Pd = \text{Forward Power Loss} = I_{F(AV)} \times V_{FM} @ (I_{F(AV)} / D)$ (see Fig. 6);
 $Pd_{REV} = \text{Inverse Power Loss} = V_{R1} \times I_R (1 - D)$; $I_R @ V_{R1} = \text{rated } V_R$


Outline Table

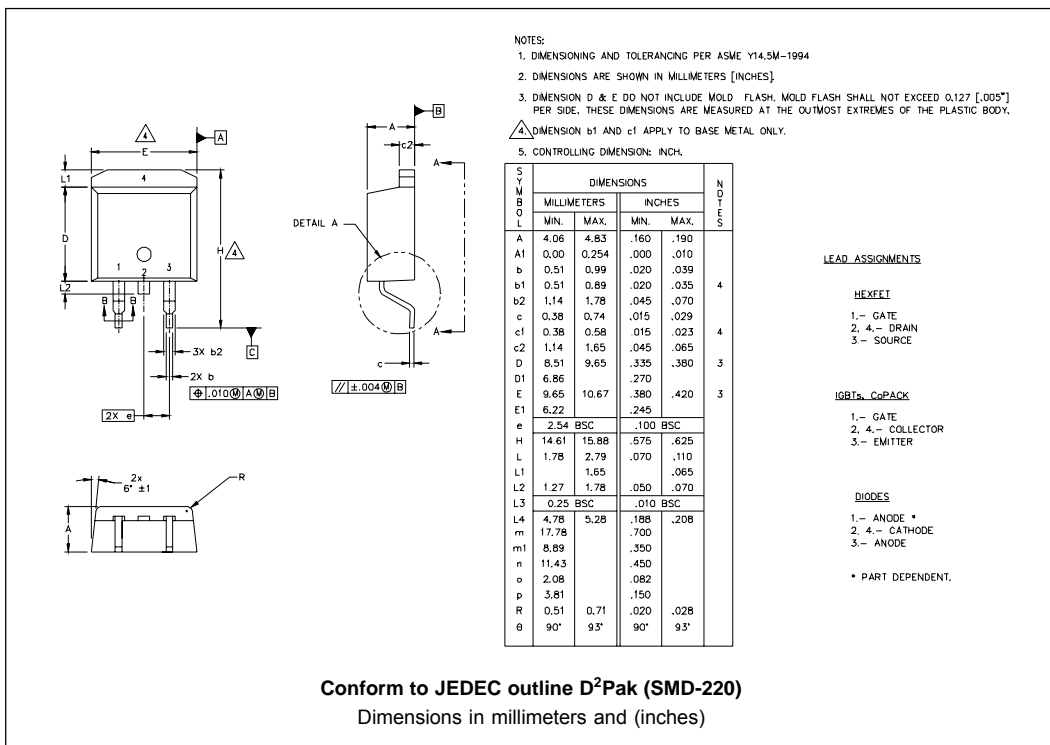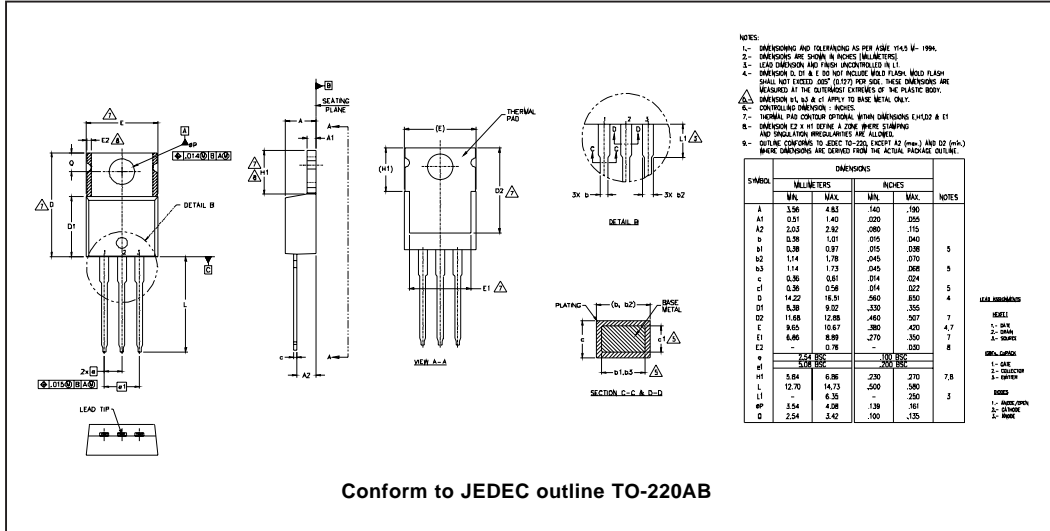




Outline Table

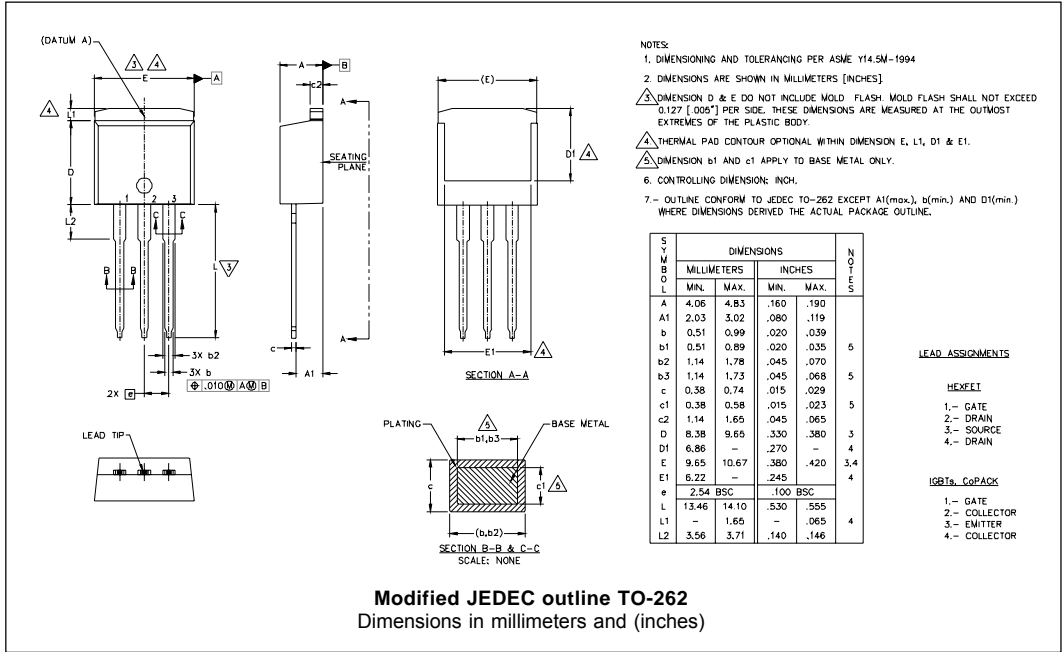

Tape & Reel Information

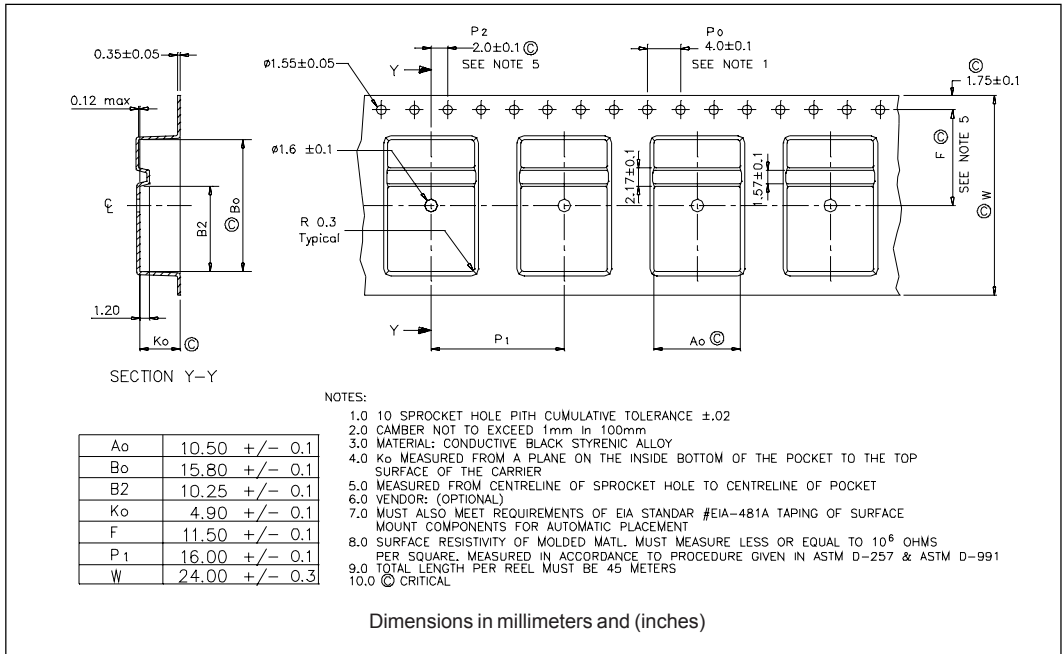

Part Marking Information
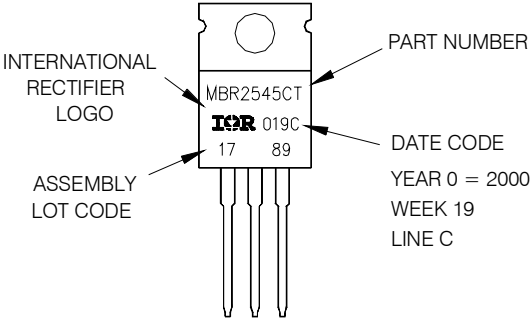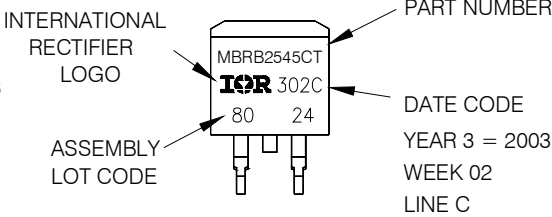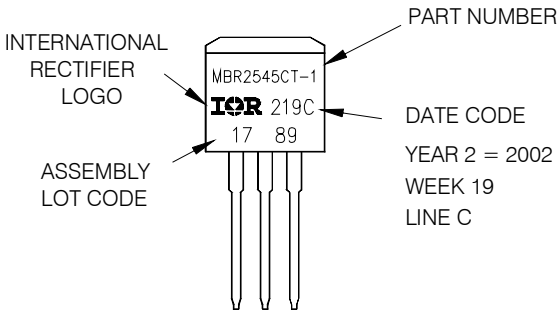
| | | |
|-------------------------|--|---|
| <p>TO-220</p> | <p>EXAMPLE: THIS IS A MBR2545CT LOT CODE 1789 ASSEMBLED ON WW 19, 2000 IN THE ASSEMBLY LINE "C"</p> |  <p>INTERNATIONAL RECTIFIER LOGO</p> <p>ASSEMBLY LOT CODE</p> <p>PART NUMBER</p> <p>DATE CODE</p> <p>YEAR 0 = 2000 WEEK 19 LINE C</p> |
| <p>D²PAK</p> | <p>EXAMPLE: THIS IS A MBRB2545CT LOT CODE 8024 ASSEMBLED ON WW 02, 2003 IN ASSEMBLY LINE "C"</p> |  <p>INTERNATIONAL RECTIFIER LOGO</p> <p>ASSEMBLY LOT CODE</p> <p>PART NUMBER</p> <p>DATE CODE</p> <p>YEAR 3 = 2003 WEEK 02 LINE C</p> |
| <p>TO-262</p> | <p>EXAMPLE: THIS IS A MBR2545CT-1 LOT CODE 1789 ASSEMBLED ON WW 19, 2002 IN ASSEMBLY LINE "C"</p> |  <p>INTERNATIONAL RECTIFIER LOGO</p> <p>ASSEMBLY LOT CODE</p> <p>PART NUMBER</p> <p>DATE CODE</p> <p>YEAR 2 = 2002 WEEK 19 LINE C</p> |

Ordering Information Table

| Device Code | | MBR | B | 25 | 45 | CT | -1 | TRL | - |
|-------------|---|--|---|----------|----|-----------------|----|-----|---|
| | | ① | ② | ③ | ④ | ⑤ | ⑥ | ⑦ | ⑧ |
| 1 | - | Essential Part Number | | | | | | | |
| 2 | - | • B = D ² Pak | | ⑥ none | | • none = TO-262 | | | |
| | | | | ⑥ = -1 | | | | | |
| 3 | - | Current Rating (25 = 25A) | | | | | | | |
| 4 | - | Voltage Ratings | | 35 = 35V | | 45 = 45V | | | |
| 5 | - | CT = Essential Part Number | | | | | | | |
| 6 | - | • none = D ² Pak | | ② = B | | • -1 = TO-262 | | | |
| | | | | ② none | | | | | |
| 7 | - | • none = Tube (50 pieces) | | | | | | | |
| | | • TRL = Tape & Reel (Left Oriented - for D ² Pak only) | | | | | | | |
| | | • TRR = Tape & Reel (Right Oriented - for D ² Pak only) | | | | | | | |
| 8 | - | • none = Standard Production | | | | | | | |
| | | • PbF = Lead-Free (for TO-262 and D ² Pak tube) | | | | | | | |
| | | • P = Lead-Free (for D ² Pak TRR and TRL) | | | | | | | |

Data and specifications subject to change without notice.
This product has been designed and qualified for Industrial Level.
Qualification Standards can be found on IR's Web site.