



HESTORE.HU

elektronikai alkatrész áruház

EN: This Datasheet is presented by the manufacturer.

Please visit our website for pricing and availability at www.hestore.hu.

MINIATURE RELAY


2 POLES—1 to 2 A (FOR SIGNAL SWITCHING)

RA SERIES

RoHS Compliant

■ FEATURES

- Ultra high sensitivity
- High reliability-bifurcated contacts
- Conforms to FCC rules and regulations Part 68
 - Dielectric strength 1,500 VAC between coil and contacts
 - Surge strength 1,500 V
- UL, CSA recognized
- Wide operating range
- DIL pitch terminals
- Plastic sealed type
- Latching type available
- Dial-pulse relay available
- RoHS compliant since date code: 0418H
Please see page 7 for more information

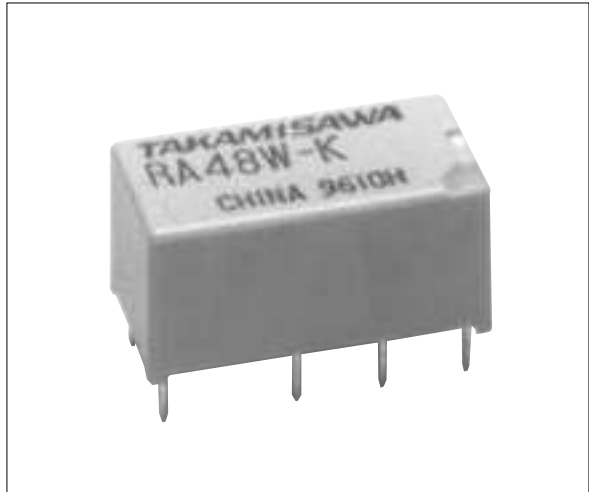

■ ORDERING INFORMATION

[Example] RA L - D 12 W - K
 (a) (b) (*) (c) (d) (e) (f)

(a)	Series Name	RA : RA Series
(b)	Operation Function	Nil : Standard type L : Latching type
(c)	Number of Coil	Nil : Single winding type D : Double winding type
(d)	Nominal Voltage	Refer to the COIL DATA CHART
(e)	Contact	W : Bifurcated type
(f)	Enclosure	K : Plastic sealed type

Note: Actual marking omits the hyphen (-) of (*)
 For movable and stationary contact with gold overlay type, add suffix ““-OH””.

■ SAFETY STANDARD AND FILE NUMBERS

UL478, 508 (File No. E45026)

C22.2 No. 14 (File No. LR35579)

Please request when the approval markings are required on the cover.

Nominal voltage	Contact rating	
1.5 to 48 VDC	0.5 A	120 VAC
	2 A	30 VDC
	0.5 A	60 VDC

— resistive

RA SERIES

■ SPECIFICATIONS

Item		Standard Type	Single Winding Latching Type	Double Winding Latching Type
		RA-() W-K	RAL-() W-K	RAL-D () W-K
Contact	Arrangement	2 form C (DPDT)		
	Material	Gold overlay silver alloy		
	Style	Bifurcated		
	Resistance (initial)	Maximum 100 mΩ (at 1 A 6 VDC)		
	Rating (resistive)	0.5 A 120 VAC or 1 A 24 VDC		
	Maximum Carrying Current	2 A		
	Maximum Switching Power	60 VA, 24 W		
	Maximum Switching Voltage	250 VAC, 220 VDC		
	Maximum Switching Current	2 A		
	Minimum Switching Load* ¹	0.01 mA 10 mVDC		
	Capacitance (10 MHz)	Approximately 1.5 pF (between open contacts), 1.0 pF (adjacent contacts) Approximately 1.7 pF (between coil and contacts)		
Coil	Nominal Power (at 20°C)	0.15 to 0.2 W	0.075 to 0.2 W	0.15 to 0.2 W
	Operate Power (at 20°C)	0.07 to 0.09 W	0.04 to 0.05 W	0.07 to 0.09 W
	Operating Temperature	-40°C to +80°C (no frost) (refer to the CHARACTERISTIC DATA)		
Time Value	Operate (at nominal voltage)	Maximum 6 ms	Maximum 6 ms (set)	
	Release (at nominal voltage)	Maximum 4 ms	Maximum 6 ms (reset)	
Insulation	Resistance (at 500 VDC)	Minimum 1,000 MΩ		
	Dielectric Strength	between open contacts	1,000 VAC 1 minute	
		between adjacent contacts	1,500 VAC 1 minute	
		between coil and contacts	1,500 VAC 1 minute	
Surge Strength	1,500 V			
Life	Mechanical	2 × 10 ⁷ operations minimum		
	Electrical	2 × 10 ⁵ ops. min. (0.5 A 120 VAC), 5 × 10 ⁵ ops. min. (1 A 24 VDC)		
Other	Vibration Resistance	Misoperation	10 to 55 Hz (double amplitude of 5.0 mm)	
		Endurance	10 to 55 Hz (double amplitude of 5.0 mm)	
	Shock Resistance	Misoperation	500 m/s ² (11 ±1 ms)	
		Endurance	1,000 m/s ² (6 ±1 ms)	
	Weight	Approximately 3.7 g		

*¹ Minimum switching loads mentioned above are reference values. Please perform the confirmation test with the actual load before production since reference values may vary according to switching frequencies, environmental conditions and expected reliability levels.

RA SERIES

COIL DATA CHART

MODEL		Nominal voltage	Coil resistance ($\pm 10\%$)	Must operate voltage* ¹	Must release voltage* ¹	Nominal power
Standard Type	RA-1.5 W-K	1.5 VDC	15 Ω	+1.0 VDC	+0.15 VDC	150 mW
	RA- 3 W-K	3 VDC	60 Ω	+2.0 VDC	+0.3 VDC	150 mW
	RA-4.5 W-K	4.5 VDC	135 Ω	+3.1 VDC	+0.45 VDC	150 mW
	RA- 5 W-K	5 VDC	167 Ω	+3.4 VDC	+0.5 VDC	150 mW
	RA- 6 W-K	6 VDC	240 Ω	+4.0 VDC	+0.6 VDC	150 mW
	RA- 9 W-K	9 VDC	540 Ω	+6.1 VDC	+0.9 VDC	150 mW
	RA- 12 W-K	12 VDC	960 Ω	+8.1 VDC	+1.2 VDC	150 mW
	RA- 18 W-K	18 VDC	2,160 Ω	+12.3 VDC	+1.8 VDC	150 mW
	RA- 24 W-K	24 VDC	2,880 Ω	+16.1 VDC	+2.4 VDC	200 mW
	RA- 48 W-K	48 VDC	11,520 Ω	+32.2 VDC	+4.8 VDC	200 mW

Note: *¹ Specified values are subject to pulse wave voltage.
All values in the table are measured at 20°C.








MODEL		Nominal voltage	Coil resistance ($\pm 10\%$)	Set voltage* ¹	Reset voltage* ¹	Nominal power
Single Winding Latching Type	RAL-1.5 W-K	1.5 VDC	30 Ω	+1.0 VDC	-1.0 VDC	75 mW
	RAL- 3 W-K	3 VDC	120 Ω	+2.1 VDC	-2.1 VDC	75 mW
	RAL-4.5 W-K	4.5 VDC	270 Ω	+3.1 VDC	-3.1 VDC	75 mW
	RAL- 5 W-K	5 VDC	335 Ω	+3.4 VDC	-3.4 VDC	75 mW
	RAL- 6 W-K	6 VDC	480 Ω	+4.1 VDC	-4.1 VDC	75 mW
	RAL- 9 W-K	9 VDC	1,080 Ω	+6.3 VDC	-6.3 VDC	75 mW
	RAL- 12 W-K	12 VDC	1,920 Ω	+8.3 VDC	-8.3 VDC	75 mW
	RAL- 18 W-K	18 VDC	4,320 Ω	+12.5 VDC	-12.5 VDC	75 mW
	RAL- 24 W-K	24 VDC	5,760 Ω	+16.6 VDC	-16.6 VDC	100 mW
	RAL-48 W-K	48 VDC	11,520 Ω	+21.0 VDC	-21.0 VDC	200 mW
Double Winding Latching Type	RAL-D1.5 W-K	1.5 VDC	P 15 Ω	+1.0 VDC		150 mW
			S 15 Ω		+1.0 VDC	
	RAL-D 3 W-K	3 VDC	P 60 Ω	+2.0 VDC		150 mW
			S 60 Ω		+2.0 VDC	
	RAL-D4.5 W-K	4.5 VDC	P 135 Ω	+3.1 VDC		150 mW
			S 135 Ω		+3.1 VDC	
	RAL-D 5 W-K	5 VDC	P 167 Ω	+3.4 VDC		150 mW
			S 167 Ω		+3.4 VDC	
	RAL-D 6 W-K	6 VDC	P 240 Ω	+4.0 VDC		150 mW
			S 240 Ω		+4.0 VDC	
	RAL-D 9 W-K	9 VDC	P 540 Ω	+6.1 VDC		150 mW
			S 540 Ω		+6.1 VDC	
	RAL-D 12 W-K	12 VDC	P 960 Ω	+8.1 VDC		150 mW
			S 960 Ω		+8.1 VDC	
RAL-D 18 W-K	18 VDC	P 2,160 Ω	+12.3 VDC		150 mW	
		S 2,160 Ω		+12.3 VDC		
RAL-D 24 W-K	24 VDC	P 2,880 Ω	+16.1 VDC		200 mW	
		S 2,880 Ω		+16.1 VDC		
RAL-D 48 W-K	48 VDC	P 11,520 Ω	+32.2 VDC		200 mW	
		S 11,520 Ω		+32.2 VDC		

Note: *¹ Specified values are subject to pulse wave voltage.
All values in the table are measured at 20°C.

P: Primary coil S: Secondary coil













RA SERIES

CHARACTERISTIC DATA

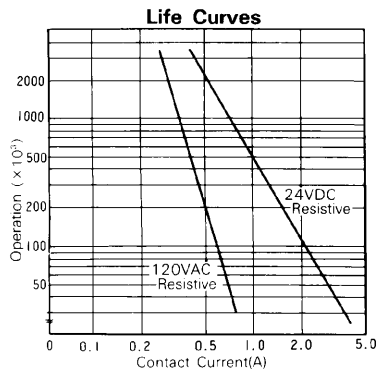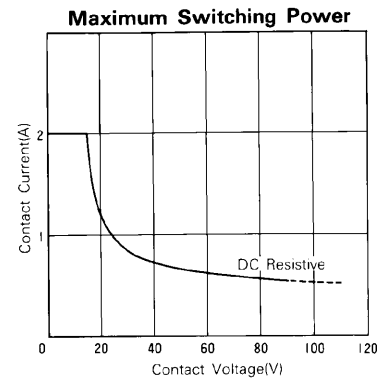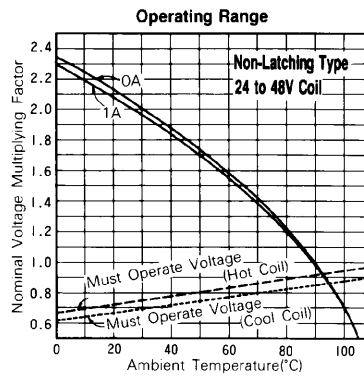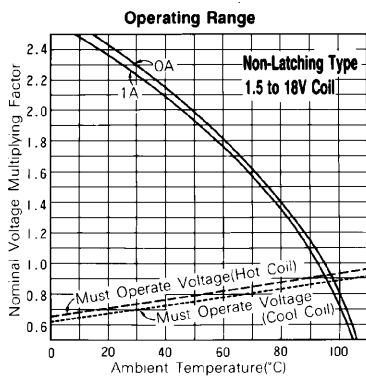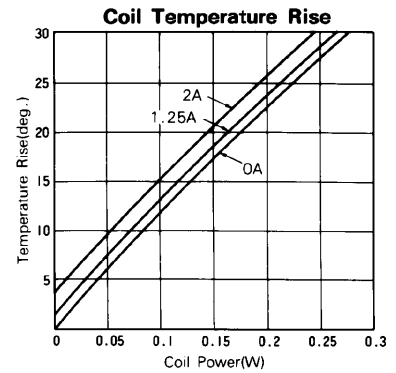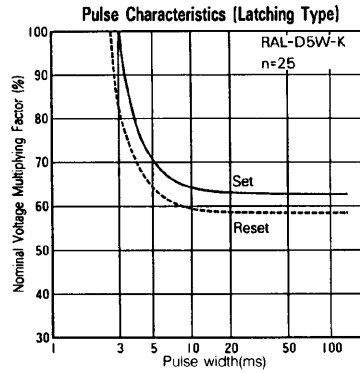
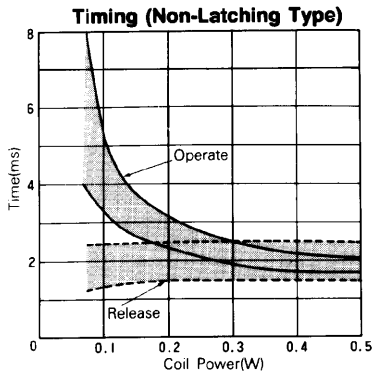


RA SERIES

REFERENCE DATA

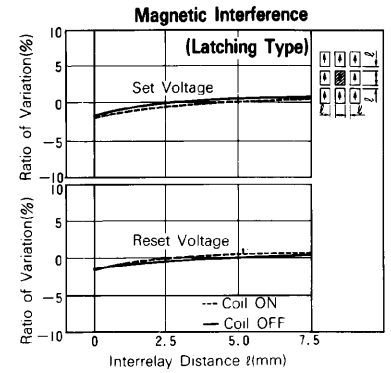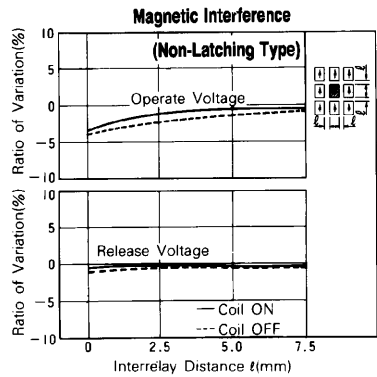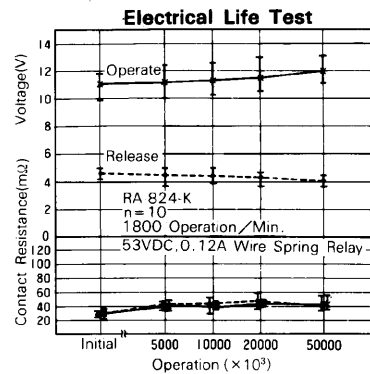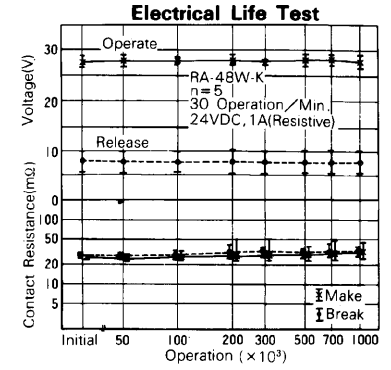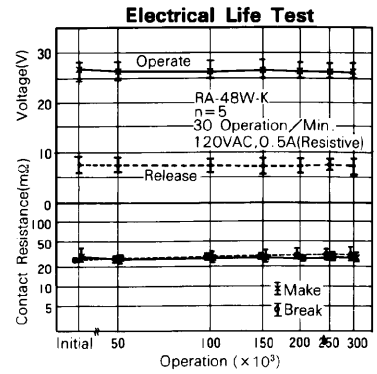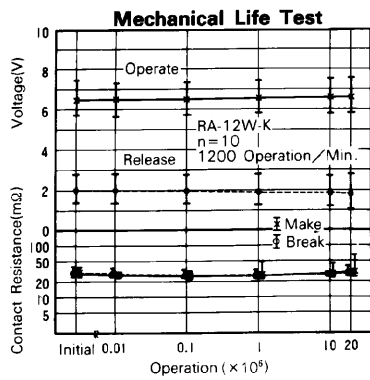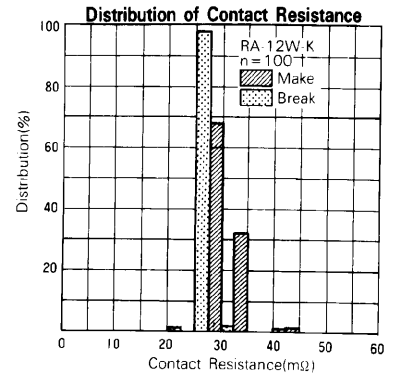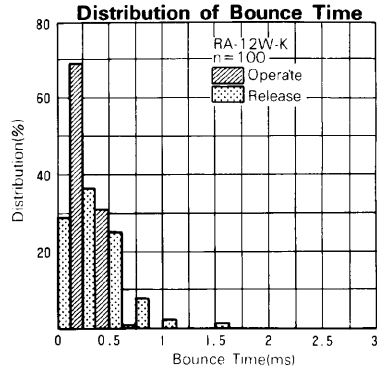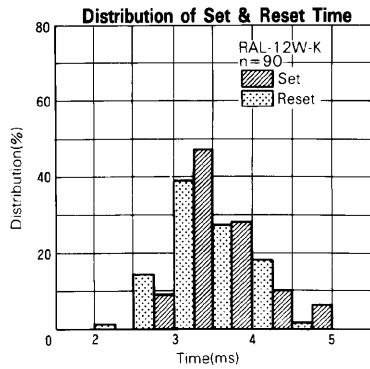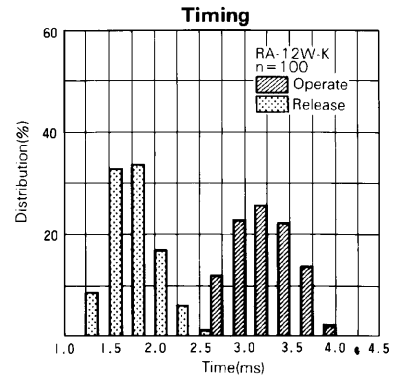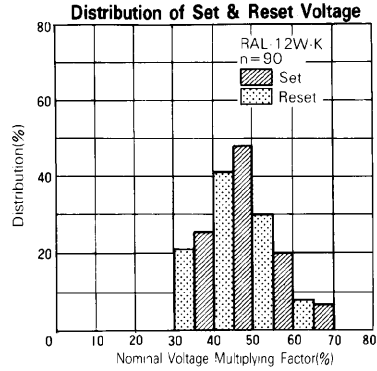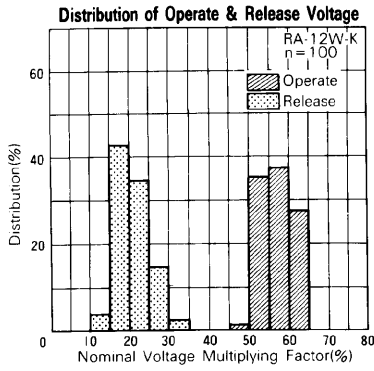

RA SERIES

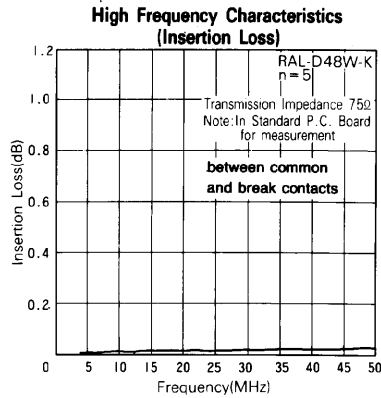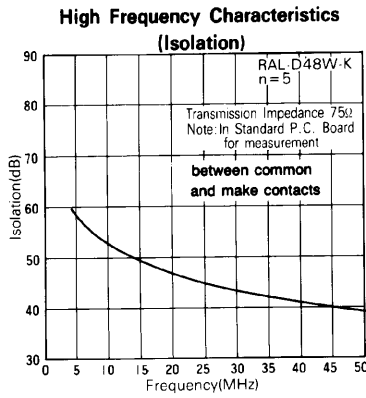




■ DIMENSIONS

● Dimensions




● Schematics (Bottom View)

● PC board mounting hole layout (Bottom View)

RA, RAL type (Non-latching type, single winding latching type)

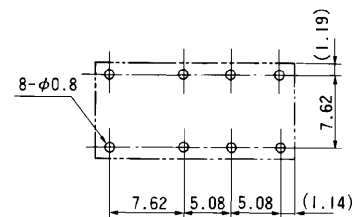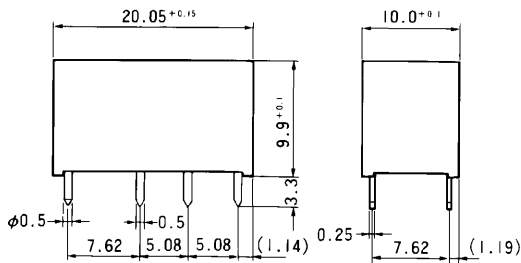

RAL-D type (Double winding latching type)

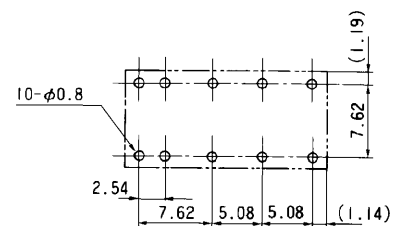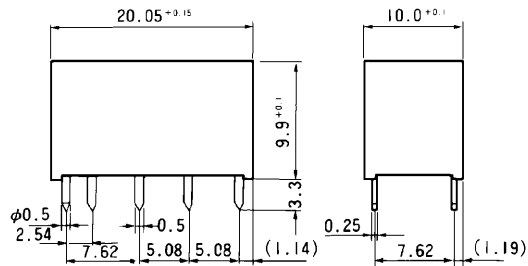

Unit: mm

RoHS Compliance and Lead Free Relay Information


1. General Information

- Relays produced after the specific date code that is indicated on each data sheet are lead-free now. Most of our signal and power relays are lead-free. Please refer to Lead-Free Status Info. (<http://www.fcai.fujitsu.com/pdf/LeadFreeLetter.pdf>)
- Lead free solder paste currently used in relays is Sn-3.0Ag-0.5Cu. From February 2005 forward Sn-3.0Cu-Ni will be used for FTRB3 and FTR-B4 series relays.
- Most signal and some power relays also comply with RoHS. Please refer to individual data sheets. Relays that are RoHS compliant do not contain the 6 hazardous materials that are restricted by RoHS directive (lead, mercury, cadmium, chromium IV, PBB, PBDE).
- It has been verified that using lead-free relays in lead assembly process will not cause any problems (compatible).
- "LF" is marked on each outer and inner carton. (No marking on individual relays).
- To avoid leaded relays (for lead-free sample, etc.) please consult with area sales office. We will ship leaded relays as long as the leaded relay inventory exists.

2. Recommended Lead Free Solder Profile

- Recommended solder paste Sn-3.0Ag-0.5Cu and Sn-3.0 Cu-Ni (only FTR-B3 and FTR-B4 from February 2005)

Reflow Solder condition

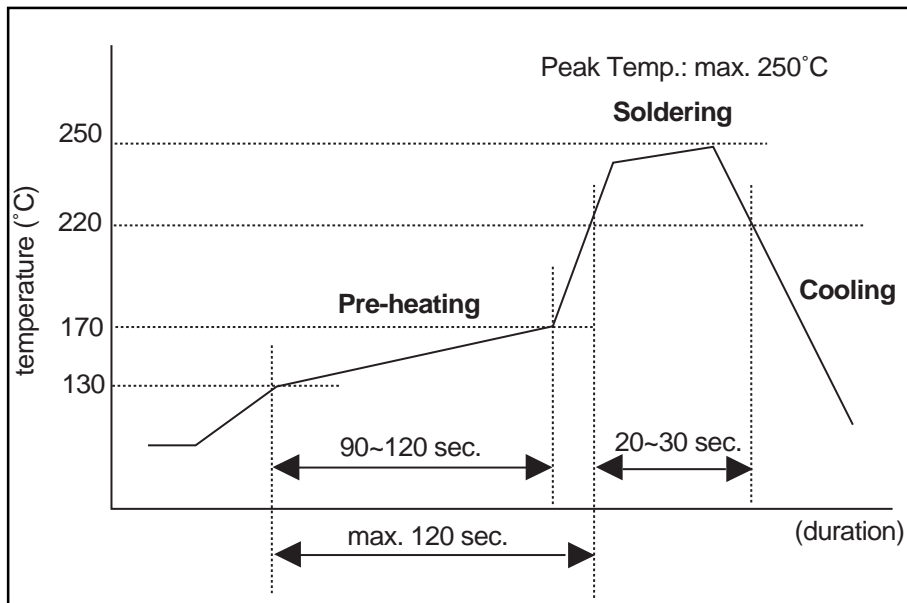

Flow Solder condition:

Pre-heating: maximum 120°C
Soldering: dip within 5 sec. at 260°C solder bath

Solder by Soldering Iron:

Soldering Iron
Temperature: maximum 360°C
Duration: maximum 3 sec.

We highly recommend that you confirm your actual solder conditions

3. Moisture Sensitivity

- Moisture Sensitivity Level standard is not applicable to electromechanical relays.

4. Tin Whisker

- SnAgCu solder is known as low risk of tin whisker. No considerable length whisker was found by our in-house test.

5. Solid State Relays

- Each lead terminal will be changed from solder plating to Sn plating and Nickel plating. A layer of Nickel plating is between the terminal and the Sn plating to avoid whisker.

Fujitsu Components International Headquarter Offices

Japan

Fujitsu Component Limited
Gotanda-Chuo Building
3-5, Higashigotanda 2-chome, Shinagawa-ku
Tokyo 141, Japan
Tel: (81-3) 5449-7010
Fax: (81-3) 5449-2626
Email: promothq@ft.ed.fujitsu.com
Web: www.fcl.fujitsu.com

North and South America

Fujitsu Components America, Inc.
250 E. Caribbean Drive
Sunnyvale, CA 94089 U.S.A.
Tel: (1-408) 745-4900
Fax: (1-408) 745-4970
Email: marcom@fcai.fujitsu.com
Web: www.fcai.fujitsu.com

Europe

Fujitsu Components Europe B.V.
Diamantlaan 25
2132 WV Hoofddorp
Netherlands
Tel: (31-23) 5560910
Fax: (31-23) 5560950
Email: info@fceu.fujitsu.com
Web: www.fceu.fujitsu.com

Asia Pacific

Fujitsu Components Asia Ltd.
102E Pasir Panjang Road
#04-01 Citilink Warehouse Complex
Singapore 118529
Tel: (65) 6375-8560
Fax: (65) 6273-3021
Email: fcal@fcal.fujitsu.com
www.fcal.fujitsu.com

© 2004 Fujitsu Components America, Inc. All company and product names are trademarks or registered trademarks of their respective owners. Rev. 12/07/2004.