



**HESTORE.HU**

elektronikai alkatrész áruház

**EN:** This Datasheet is presented by the manufacturer.

Please visit our website for pricing and availability at [www.hestore.hu](http://www.hestore.hu).

# Power PCB Relay RT1

1 pole 12 / 16 A, DC- or AC-coil



F0144-B

## Features

- 1 C/O or 1 N/O contact
- Sensitive coil 400 mW
- 5 kV / 10 mm coil-contact, Protection class II (VDE 0700)
- Ambient temperature 85°C (DC-coil)
- Height 15.7 mm
- Sockets with PCB-type or screw-type terminals
- Gold plated contacts available

## Applications

Boiler control, timers, garage door control, POS automation, interface modules



Technical data of approved types on request

### Contact data

Configuration	1 C/O contact or 1 N/O contact	
Type of contact	single contact	
Rated current	12 A	16 A
Rated voltage / max.breaking voltage AC	250 Vac / 440 Vac	
Maximum breaking capacity AC	3000 VA	4000 VA
Make current (max. 4 s at duty cycle 10%)	25 A	30 A
Contact material	AgNi 90/10, AgNi 90/10 gold plated	

### Contact ratings

Type	Load	Operations
RT314	1000 W, 250 Vac, incandescent lamps	1.2x10 <sup>3</sup>
RT314	16 A, 250 Vac, cosφ=1, N/C contact	53x10 <sup>3</sup>
RT314	10 A, 250 Vac, cosφ=0.6, C/O contact	2x10 <sup>5</sup>
RT314	5 A / 2 A, 250 Vac, cosφ=1, tumble-drier motor, N/O contact	1.1x10 <sup>6</sup>
RT314	0.26A <sub>peak</sub> / 0.01 A, 230 Vac, cosφ=0.38, valve, N/O contact	7.6x10 <sup>6</sup>

### Coil data


Nominal voltage	DC coil	5...110 Vdc
	AC coil	24...230 Vac
Nominal coil power	DC coil	400 mW
	AC coil	0.75 VA
Operate category	2 / b	

### Coil versions, DC-coil

Coil code	Nominal voltage Vdc	Pull-in voltage Vdc	Release voltage Vdc	Maximum voltage Vdc	Coil resistance Ω	Coil current mA
005	5	3.5	0.5	12.7	62±10%	80.0
006	6	4.2	0.6	15.3	90±10%	66.7
012	12	8.4	1.2	30.6	360±10%	33.3
024	24	16.8	2.4	61.2	1440±10%	16.7
048	48	33.6	4.8	122.4	5520±10%	8.7
060	60	42.0	6.0	153.0	7340±12%	8.1
110	110	77.0	11.0	280.5	26600±12%	4.1


All figures are given for coil without preenergization, at ambient temperature +20°C  
Other coil voltages on request

### Max. DC load breaking capacity

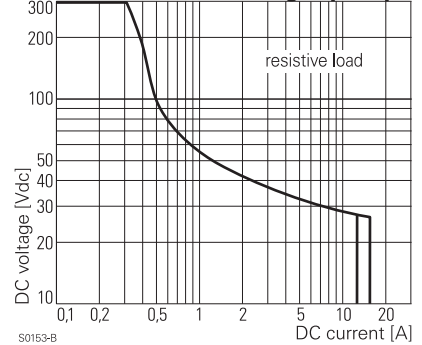


S0153-B

### Electrical endurance

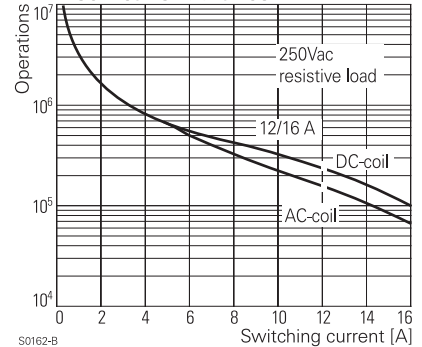

S0162-B

### Coil operating range DC

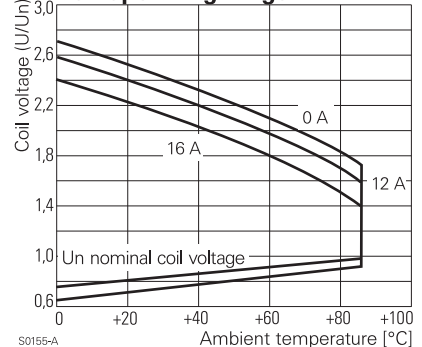

S0155-A

# Power PCB Relay RT1

1 pole 12 / 16 A, DC- or AC-coil

## Coil versions, AC-coil

Coil code	Nominal voltage Vac	Pull-in voltage Vac	Release voltage Vac	Maximum voltage Vac	Coil resistance $\Omega$	Coil current mA
524	24	18.0	3.6	36.0	350 ± 10%	31.6
615	115	86.3	17.3	172.5	8100 ± 15%	6.6
730	230	172.5	34.5	345.0	32500 ± 15%	3.2

All figures are given for coil without preenergization, at ambient temperature +20°C


## Insulation

Dielectric strength	coil-contacts	5000 V <sub>rms</sub>
	open contact circuit	1000 V <sub>rms</sub>
Clearance / creepage		10 / 10 mm
Insulation to IEC 60664		
Voltage rating		250 V
Pollution degree		3
Overvoltage category		III
Insulation to VDE 0110b (2/79)		
Insulation category / reference voltage		C / 250
Tracking resistance of relay base		CTI 250

## Other data

Flammability class according to UL 94	V-0
Coil insulation system according to UL 1446	Class F
Ambient temperature	DC-coil -40...+85 °C AC-coil -40...+70 °C
Mechanical life	DC-coil >30x10 <sup>6</sup> operations AC-coil >10x10 <sup>6</sup> operations
Max. switching rate at rated- / minimum load	6 min <sup>-1</sup> / 1200 min <sup>-1</sup>
Operate- / release time DC-coil	typ. 7 / 3 ms
Bounce time N/O contact/N/C contact	typ. 1 / 3 ms
Vibration resistance N/O / N/C contact	20 / 5 g, 30...500 Hz
Shock resistance (destruction)	100 g
Category of protection (IEC 61810)	RT II, RT III
Relay weight	14 g
Packaging unit	20 / 500 pcs.
Accessories	see accessories RT


## Coil operating range AC

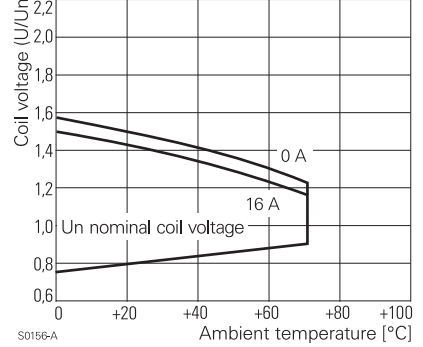

S0156-A

## Dimensions

Dimensions in mm

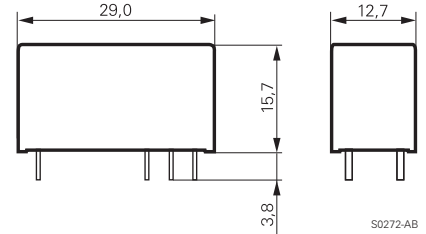


S0272-AB


## PCB layout / terminal assignment

View on solder pins  
Dimensions in mm


12 A, pinning 3.5 mm

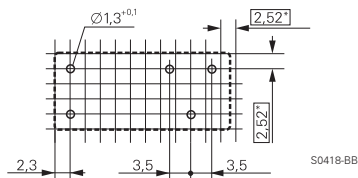


12 A, pinning 5 mm

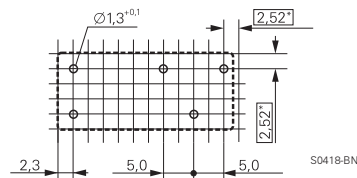


16 A, pinning 5 mm

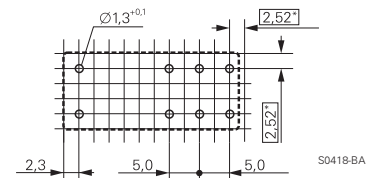


1 C/O contact

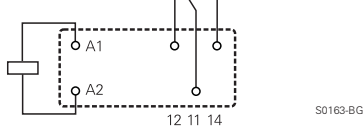


1 C/O contact

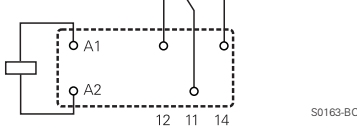


1 C/O contact

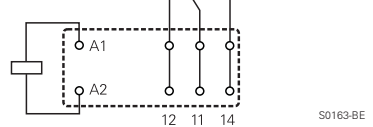


1 N/O contact

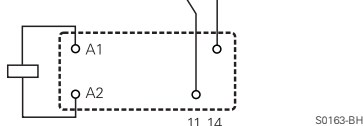

1 N/O contact

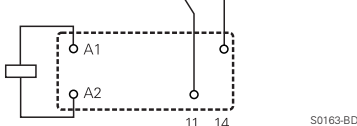

1 N/O contact

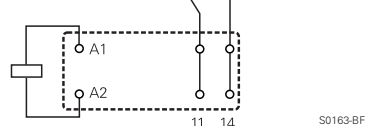

# Power PCB Relay RT1

1 pole 12 / 16 A, DC- or AC-coil

Product key		RT							
Type	Version								
Contacts	<b>1 12 A, pinning 3.5 mm, flux proof</b>			<b>B</b>	12 A, pinning 3.5 mm, wash tight				
	<b>2 12 A, pinning 5 mm, flux proof *)</b>			<b>D</b>	16 A, pinning 5 mm, wash tight				
	<b>3 16 A, pinning 5 mm, flux proof</b>								
Contacts	<b>1 1 C/O contact</b>			<b>3</b>	1 N/O contact				
Contact material	<b>4 AgNi 90/10</b>			<b>5</b>	AgNi 90/10 gold plated (for type RT31.)				
Coil	Coil code: please refer to coil versions table								

Preferred types in bold print  
 \*) Washable version on request

Product key	Version	Contacts	Cont. material	Coil	Coil	Part number
RT114005	12 A	1 C/O contact	AgNi 90/10	DC-coil	5 Vdc	0-1393239-7
RT114006	pinning 3.5 mm flux proof				6 Vdc	0-1393239-8
RT114012					12 Vdc	0-1419108-1
RT114024					24 Vdc	1-1393239-3
RT114048					48 Vdc	1-1393239-4
RT114110				AC-coil	110 Vdc	1-1393239-6
RT114524					24 Vac	1-1393239-7
RT114615					115 Vac	1-1393239-8
RT114730		1 N/O contact		DC-coil	230 Vac	1-1393239-9
RT134012					12 Vdc	2-1393239-6
RT134024					24 Vdc	3-1393239-0
RT214012	12 A, pinning 5mm flux proof	1 C/O contact			12 Vdc	5-1393239-4
RT214024					24 Vdc	5-1393239-5
RT314005	16 A				5 Vdc	9-1393239-1
RT314006	pinning 5 mm flux proof				6 Vdc	9-1393239-3
RT314012					12 Vdc	9-1393239-5
RT314024					24 Vdc	9-1393239-8
RT314048					48 Vdc	9-1393239-8
RT314060					60 Vdc	0-1393240-1
RT314110				AC-coil	110 Vdc	0-1393240-3
RT314524					24 Vac	0-1393240-4
RT314615					115 Vac	0-1393240-6
RT314730					230 Vac	0-1393240-7
RT315012			AgNi 90/10 gold plated	DC-coil	12 Vdc	1-1393240-1
RT315024				AC-coil	24 Vdc	1-1393240-4
RT334012		1 N/O contact	AgNi 90/10	DC-coil	230 Vac	1-1419108-1
RT334024					12 Vdc	4-1393240-5
RT334048					24 Vdc	4-1393240-8
RTB14005	12 A	1 C/O contact			48 Vdc	5-1393240-0
RTB14012	pinning 3.5 mm wash tight				5 Vdc	1-1393238-2
RTB14024					12 Vdc	1-1393238-5
RTB14048					24 Vdc	1-1393238-9
RTD14005	16 A				48 Vdc	2-1393238-1
RTD14006	pinning 5 mm wash tight				5 Vdc	5-1393238-9
RTD14012					6 Vdc	6-1393238-0
RTD14015					12 Vdc	6-1393238-2
RTD14024					15 Vdc	6-1393238-4
RTD14048					24 Vdc	6-1393238-8
RTD34005					48 Vdc	6-1393238-9
RTD34012		1 N/O contact			5 Vdc	8-1393238-3
RTD34024					12 Vdc	3-1419108-5
					24 Vdc	3-1419108-8