



**HESTORE.HU**

elektronikai alkatrész áruház

**EN:** This Datasheet is presented by the manufacturer.

Please visit our website for pricing and availability at [www.hestore.hu](http://www.hestore.hu).



### FEATURES

- **Miniature size with universal terminal footprint**
- **High contact capacity: 10 A**
- **TV-5 type available (Standard type)**  
1 Form A type → TV-5  
1 Form C type → TV-5 (N.O. side only)
- **VDE, TÜV also approved**
- **Sealed construction for automatic cleaning (Standard type)**
- **Class B and F coil insulation type also available.**
- **EN60335-1 GWT compliant (Tested by VDE) type available**
- **Surge voltage 6 kV type also available**

### TYPICAL APPLICATIONS

- 1. Home appliances**  
Air conditioner, heater, etc.
- 2. Office machines**  
PPC, facsimile, etc.
- 3. Vending machines**

### ORDERING INFORMATION

JS  -  -  -  - **F**  -

**Contact arrangement**

- 1: 1 Form C (Standard)
- 1a: 1 Form A (Standard)
- 1aP: 1 Form A (Long endurance type)

**Protective construction**

- Nil: Sealed type
- F: Flux-resistant type

**Coil insulation class**

- Nil: Class E insulation
- B: Class B insulation
- F: Class F insulation

**Nominal coil voltage (DC)**

5V, 6V, 9V, 12V, 18V, 24V, 48V

**Contact material**

F: AgSnO<sub>2</sub> type

**Flame resistance and tracking resistance**

- Nil: -
- TT: EN60335-1 (Conform)

**Surge voltage**

6K: 6kV type

**Standard: UL, CSA, VDE, TÜV (Standard type)**

- UL, CSA, VDE (Long endurance type and EN60335-1 GWT compliant type)
- UL, CSA (Surge voltage 6kV type)

Notes: 1. When ordering TV rated (TV-5) types, add suffix -TV.

2. Contact arrangement 1aP type is Flux-resistant type only (Class B insulation only).

**TYPES**

Contact arrangement	Nominal coil voltage	Sealed type	Flux-resistant type
		Part No.	Part No.
1 Form A (Standard)	5V DC	JS1a-5V-F	JS1aF-5V-F
	6V DC	JS1a-6V-F	JS1aF-6V-F
	9V DC	JS1a-9V-F	JS1aF-9V-F
	12V DC	JS1a-12V-F	JS1aF-12V-F
	18V DC	JS1a-18V-F	JS1aF-18V-F
	24V DC	JS1a-24V-F	JS1aF-24V-F
	48V DC	JS1a-48V-F	JS1aF-48V-F
1 Form A Long endurance type	5V DC	–	JS1aPF-B-5V-F
	6V DC	–	JS1aPF-B-6V-F
	9V DC	–	JS1aPF-B-9V-F
	12V DC	–	JS1aPF-B-12V-F
	18V DC	–	JS1aPF-B-18V-F
	24V DC	–	JS1aPF-B-24V-F
	48V DC	–	JS1aPF-B-48V-F
1 Form C (Standard)	5V DC	JS1-5V-F	JS1F-5V-F
	6V DC	JS1-6V-F	JS1F-6V-F
	9V DC	JS1-9V-F	JS1F-9V-F
	12V DC	JS1-12V-F	JS1F-12V-F
	18V DC	JS1-18V-F	JS1F-18V-F
	24V DC	JS1-24V-F	JS1F-24V-F
	48V DC	JS1-48V-F	JS1F-48V-F

Standard packing Carton: 100 pcs. Case: 500 pcs.

Notes: 1. Class B and F coil insulation types available.

Ex) JS1aF-B-12V-F, JS1aF-F-12V-F

2. EN60335-1 GWT compliant types available. When ordering, please add suffix "TT".

Ex) JS1aF-B-12V-FTT

Contact arrangement	Nominal coil voltage	Sealed type	Flux-resistant type
		Part No.	Part No.
1 Form A (Standard)	5V DC	JS1a-5V-FTT	JS1aF-5V-FTT
	6V DC	JS1a-6V-FTT	JS1aF-6V-FTT
	9V DC	JS1a-9V-FTT	JS1aF-9V-FTT
	12V DC	JS1a-12V-FTT	JS1aF-12V-FTT
	18V DC	JS1a-18V-FTT	JS1aF-18V-FTT
	24V DC	JS1a-24V-FTT	JS1aF-24V-FTT
	48V DC	JS1a-48V-FTT	JS1aF-48V-FTT
1 Form A Long endurance type	5V DC	–	JS1aPF-B-5V-FTT
	6V DC	–	JS1aPF-B-6V-FTT
	9V DC	–	JS1aPF-B-9V-FTT
	12V DC	–	JS1aPF-B-12V-FTT
	18V DC	–	JS1aPF-B-18V-FTT
	24V DC	–	JS1aPF-B-24V-FTT
	48V DC	–	JS1aPF-B-48V-FTT
1 Form C (Standard)	5V DC	JS1-5V-FTT	JS1F-5V-FTT
	6V DC	JS1-6V-FTT	JS1F-6V-FTT
	9V DC	JS1-9V-FTT	JS1F-9V-FTT
	12V DC	JS1-12V-FTT	JS1F-12V-FTT
	18V DC	JS1-18V-FTT	JS1F-18V-FTT
	24V DC	JS1-24V-FTT	JS1F-24V-FTT
	48V DC	JS1-48V-FTT	JS1F-48V-FTT

3. Surge voltage 6kV types available. When ordering, please add suffix "6K" (except for Long endurance type and EN60335-1 GWT compliant type).

Ex) JS1aF-B-12V-F-6K

# RATING

## 1. Coil data

Nominal coil voltage	Pick-up voltage (at 20°C 68°F)	Drop-out voltage (at 20°C 68°F)	Nominal operating current [ $\pm 10\%$ ] (at 20°C 68°F)	Coil resistance [ $\pm 10\%$ ] (at 20°C 68°F)	Nominal operating power (at 20°C 68°F)	Max. applied voltage (at 70°C 158°F)
5V DC	70%V or less of nominal voltage (Initial)	10%V or more of nominal voltage (Initial)	72 mA	69.4 $\Omega$	360mW	130%V of nominal voltage [When using relays at 85°C 185°F, see Note*]
6V DC			60 mA	100 $\Omega$		
9V DC			40 mA	225 $\Omega$		
12V DC			30 mA	400 $\Omega$		
18V DC			20 mA	900 $\Omega$		
24V DC			15 mA	1,600 $\Omega$		
48V DC			7.5mA	6,400 $\Omega$		

Note: \* When using relays in a high ambient temperature, consider the pick-up voltage rise due to the high temperature (a rise of approx. 0.4% V for each 1°C 33.8°F with 20°C 68°F as a reference) and use a coil impressed voltage that is within the maximum applied voltage range.

## 2. Specifications

Characteristics	Item	Specifications	
Contact	Contact material	AgSnO <sub>2</sub> type	
	Contact resistance (Initial)	Max. 100 m $\Omega$ (By voltage drop 6 V DC 1A)	
	Arrangement	1 Form A, 1 Form C 1 Form A Long endurance type	
Rating	Nominal switching capacity (resistive load)	10 A 250 V AC (NO), 10 A 125 V AC, 6 A 277 V AC, 5 A 30 V DC 10 A 250 V AC, 10 A 277 V AC, 5 A 30 V DC	
	Max. switching power (resistive load)	2,500VA 150W (NO), 1,662VA 150W (NC) 2,770VA 150W	
	Max. switching voltage	250V AC, 100V DC (0.5A)	
	Max. switching current	10A (AC), 5A (DC)	
	Nominal operating power	360mW	
	Min. switching capacity*1	100mA, 5V DC	
Electrical characteristics	Insulation resistance (Initial)	Min. 100M $\Omega$ (at 500V DC) Measurement at same location as "Breakdown voltage" section.	
	Breakdown voltage (Initial)	Between open contacts	750 Vrms for 1 min. (Detection current: 10 mA)
		Between contact and coil	1,500 Vrms for 1 min. (Detection current: 10 mA)
	Temperature rise (coil)	Max. 35°C 95°F (By resistive method, nominal coil voltage applied to the coil; contact carrying current: 10A, at 70°C 158°F)	
	Operate time (at nominal voltage) (at 20°C 68°F)	Max. 10 ms (excluding contact bounce time.)	
Release time (at nominal voltage) (at 20°C 68°F)	Max. 10 ms (excluding contact bounce time) (Without diode)		
Mechanical characteristics	Shock resistance	Functional	98 m/s <sup>2</sup> (Half-wave pulse of sine wave: 11 ms; detection time: 10 $\mu$ s.)
		Destructive	980 m/s <sup>2</sup> (Half-wave pulse of sine wave: 6 ms.)
	Vibration resistance	Functional	10 to 55 Hz at double amplitude of 1.6 mm (Detection time: 10 $\mu$ s.)
		Destructive	10 to 55 Hz at double amplitude of 2 mm
Expected life	Mechanical (at 180 times/min.)	Min. 10 <sup>7</sup>	
	Electrical (resistive load)	1 $\times 10^5$ [10A 125V AC, 6A 277V AC, 5A 30V DC] 5 $\times 10^4$ (NO contact only) [10A 250V AC] 2 $\times 10^5$ [10A 277V AC] 1.5 $\times 10^5$ [10A 250V AC (at 20 times/min., 105°C 221°F)] 1 $\times 10^5$ [5A 30V DC]	
Conditions	Conditions for operation, transport and storage*2	-40°C to +70°C -40°F to +158°F (Class E insulation) -40°C to +85°C -40°F to +185°F (Class B insulation)*3 -40°C to +105°C -40°F to +221°F (Class F insulation)*3 Humidity: 5 to 85% R.H. (Not freezing and condensing at low temperature) -40°C to +105°C -40°F to +221°F*3; Humidity: 5 to 85% R.H. (Not freezing and condensing at low temperature)	
	Max. operating speed	20 times/min. (at nominal switching capacity)	
Unit weight		Approx. 12 g .423 oz	

Notes:


\*1. This value can change due to the switching frequency, environmental conditions, and desired reliability level, therefore it is recommended to check this with the actual load.

\*2. The upper limit of the ambient temperature is the maximum temperature that can satisfy the coil temperature rise value. Refer to "6. Usage, Storage and Transport Conditions" in [AMBIENT ENVIRONMENT section in Relay Technical Information](#).

\*3. When using relays in a high ambient temperature, consider the pick-up voltage rise due to the high temperature (a rise of approx. 0.4% V for each 1°C 33.8°F with 20°C 68°F as a reference) and use a coil impressed voltage that is within the maximum applied voltage range.


REFERENCE DATA

1. Maximum value for switching capacity

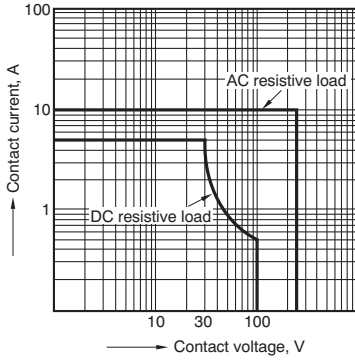


2.-(1) Coil temperature rise

Sample: 5 pcs., JS1a-24V-F  
Measured portion: Inside the coil  
Contact current: 5 A

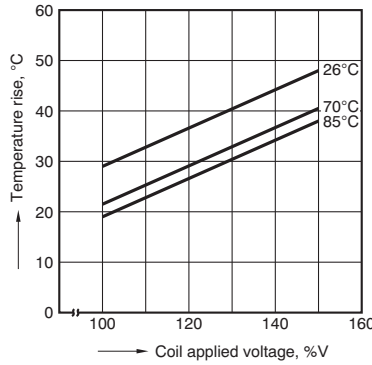


2.-(2) Coil temperature rise

Sample: 5 pcs., JS1a-24V-F  
Measured portion: Inside the coil  
Contact current: 10 A

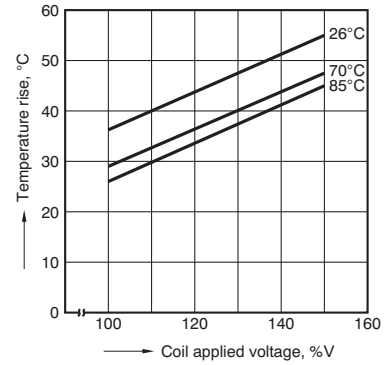


3. Life curve

Ambient temperature: Room temperature

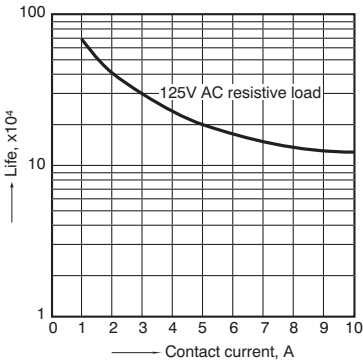


4. Operate/release time

Sample: 25 pcs., JS1-12V-F

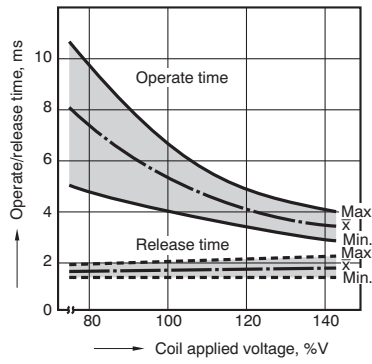

5. Ambient temperature characteristics

Sample: 6 pcs., JS1-12V-F




DIMENSIONS (mm inch)

Download [CAD Data](#) from our Web site.


[CAD Data](#)




External dimensions

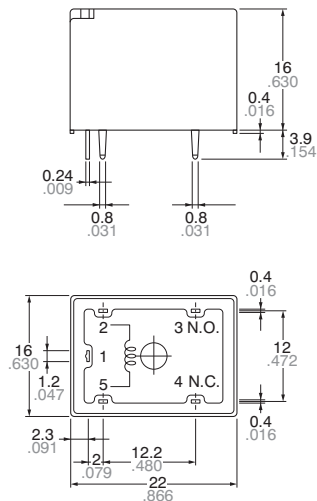

Schematic (Bottom view)

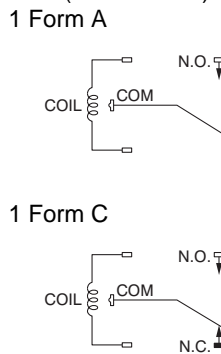

PC board pattern (Bottom view)

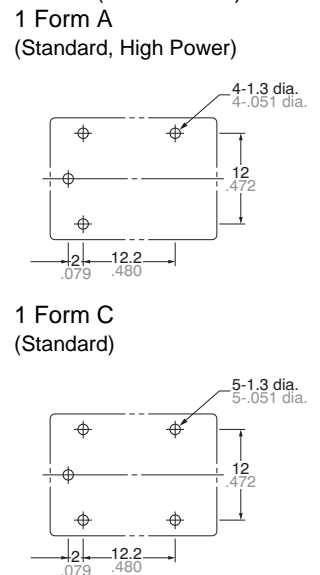

Note: Terminal No. 4 is only for Standard 1 Form C type

Dimension:

Less than 1mm .039inch:  
Min. 1mm .039inch less than 3mm .118 inch:  
Min. 3mm .118 inch:

General tolerance

±0.1 ±.004  
±0.2 ±.008  
±0.3 ±.012

Tolerance: ±0.1 ±.004

**SAFETY STANDARDS**

UL/C-UL (Recognized)		CSA (Certified)		VDE (Certified)		TV rating (UL/CSA)		TÜV (Certified)	
File No.	Contact rating	File No.	Contact rating	File No.	Contact rating	File No.	Rating	File No.	Rating
E43028	10A 125V AC, 6A 277V AC 5A 30V DC, 1/8HP 125V AC 1/8HP 277V AC 12A 125V AC (N.O., N.C.) 12A 277V AC (N.O., N.C.) 10A 125V AC (N.O., N.C.) 85°C 5A 125V AC (N.O., N.C.) 105°C, Class B insulation 4FLA/4LRA125V AC 105°C 2FLA/4LRA125V AC 105°C 1/3HP 125V AC 75°C N.O. 1/3HP 277V AC 75°C N.O. 6FLA/6LRA125V AC 85°C (N.O.)	LR26550	10A 125V AC 12A 125V AC 6A 277V AC 12A 277V AC 5A 30V DC 1/8HP 125V AC 1/8HP 277V AC	40011475	10A 125V AC (cosφ=1.0) 5A 30V DC (0ms) 6A 250V AC (cosφ=1.0)	UL E43028 CSA LR26550	1a→TV-5 1c→TV-5 (N.O.)	B 10 02 13461 271	10A 125V AC (cosφ=1.0) 6A 250V AC (cosφ=1.0) 5A 30V DC (0ms)

**For Cautions for Use, see [Relay Technical Information](#).**