




HESTORE.HU

elektronikai alkatrész áruház

EN: This Datasheet is presented by the manufacturer.

Please visit our website for pricing and availability at www.hestore.hu.

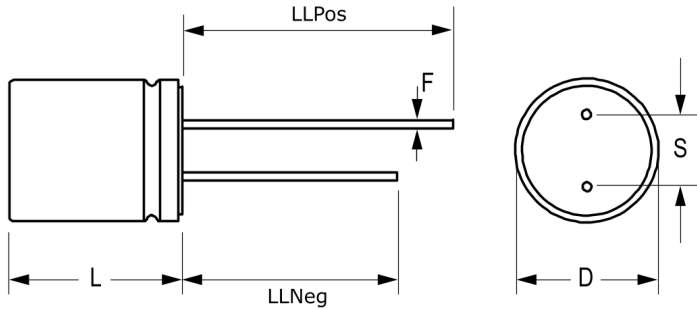

Click [here](#) for the 3D model.

Dimensions

D	5mm +/-0.5mm
L	11mm +/-1mm
S	2mm +/-0.5mm
LL Negative	15mm MIN
LL Positive	19mm MIN
F	0.5mm +/-0.05mm

Packaging Specifications

Packaging	Bulk, Bag
Packaging Quantity	1000

General Information

Series	A759
Dielectric	Polymer Aluminum
Description	Single Ended, Polymer Aluminum
RoHS	Yes
Lead	Wire Leads
AEC-Q200	No
Halogen Free	Yes

Specifications

Capacitance	33 uF
Capacitance Tolerance	20%
Voltage DC	35 VDC, 40.2 VDC (Surge)
Temperature Range	-55/+125°C
Rated Temperature	125°C
Life	2000 Hrs (+/-20% Initial Capacitance, 1.5x DF MAX, Leakage Within Limit)
Dissipation Factor	12% 120Hz 20C
Resistance	75 mOhms (100kHz 20C)
Ripple Current	690 mAmps (100kHz 105C), 400 mAmps (100kHz 125C)
Leakage Current	173.25 uA (2min 20°C)